



#### **Basic Information**

Place of Origin: GUANGZHOU/CHINABrand Name: PUNAISGD/CABLEPULS

Certification: ISO/CE/ROSH
Model Number: GYTZA53
Minimum Order Quantity: 2km
Price: negotiate

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

• Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



### **Product Specification**

• Waterproof: Yes

• Armored Type: Double Armored

• Jacket Material: LZSH

Installation Method: Direct Buried

Armored: Aluminum And Steel

• WARRANTY: 25 Years

• Highlight: LSZH Sheath Direct Buried Cable,

Flame Retardant Direct Buried Cable,

**Armored Direct Buried Cable** 



## More Images




Our Product Introduction

#### GYTZA53 Fiber Optic Cable Outdoor Cable Armored LZSH Sheath Flame Retardant Cable

## **Products Descriptions**

- 1. Specifically designed for a compact cable arrangement, ensuring robustness against mechanical demands such as stretching and bending.
- 2. The loose tube material demonstrates remarkable hydrolysis resistance and strength, fully protecting the fiber optic strands.
- 3. Enrobed with a crease-free, dual-ply plastic-coated steel belt and encased in HDPE, ready for direct soil interment.
- 4. The outer PA12 nylon sheath provides effective defense against animal pests, ensuring the cable's safety in certain scenarios.
- 5. The cable is fully filled to ensure its waterproof nature after being buried.



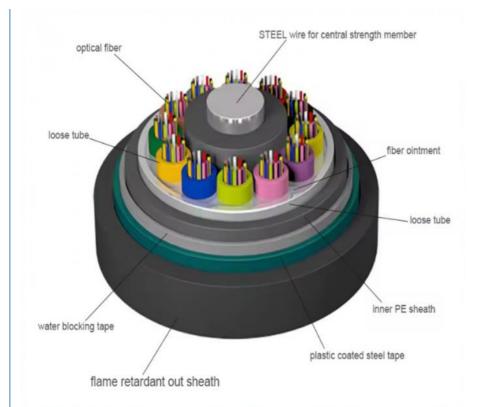

# GYTZA53 flame retardant optic fiber cable

#### **Features**

Demonstrates outstanding mechanical and heat-related attributes.

The material of the loose tube is inherently endowed with exceptional hydrolysis resistance and formidable strength.

The tube is saturated with a unique gel that serves to protect the fiber.

The cable's dense structure is specifically crafted to prevent any retraction of the casing.

#### **Produc Paraments**

Fiber count		Fibers per tube	Loose tube diamete r(mm)	CSM diameter /pad diamete (mm)	Thicknes s of inner jacket (mm)	Thickness of outer jacket (mm)	Cable diameter (mm)	Cable Weight (kg/km)
4	1+6	4	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	164
6	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	164
8	1+6	4	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	164
12	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	164
18	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	165
24	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	165
30	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	166
36	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	166
48	1+6	12	2.0+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	13.8 ± 0.5	191
60	1+6	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	13.8 ± 0.5	191
72	1+6	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	13.8 ± 0.5	192
84	1+7	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	14.7 ± 0.5	218
96	1+8	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	15.4 ± 0.5	234
108	1+9	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	16.1 ± 0.5	253
120	1+10	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	16.8 ± 0.5	272
132	1+11	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	17.4 ± 0.5	293
144	1+12	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	18.2 ± 0.5	317
288	1+9+15	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	20.1 ± 0.5	383

## Learn more about our products and factory

#### **NEWS AND FIBER OPTICAL CABLE SOLUTION**

PROFESSIONAL PERSISTENCE

















Experier

nces Sold to Countries Cooperati

0+

120+ ≤ 2h

•

99%















#### **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**









A P

▲ Finished Cable Testin





## **HOT-SALE PRODUCT**







## How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.





+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com