

# **GYFTS53 Outdoor Fiber Optic Cable Non Metallic FRP Strength** Member

### **Basic Information**

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: GYFTS53 Model Number: • Minimum Order Quantity: 2km • Price: negotiate

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



### **Product Specification**

• Type: GYFTS53 Moisture Resistant: Yes

-40°C To 90°C . Temperature Rating: · Application: Underground

PΕ Jacket Material: • Fiber Count: 72 Cores

. Highlight: GYFTS53 Outdoor Fiber Optic Cable,

Non Metallic Fiber Optic Cable, **FRP Fiber Optical Cable** 



## More Images



### **Product Description**

GYFTS53 Fiber Optic Cable Outdoor Optic Cable Nom-Metallic Strength Member

## **Product description**

The heart of the GYFTS53 cable is an FRP rod, which is the central strength member. The cable's core is tightly wound with a loose tube and filler rope to form a dense, round structure, with water-blocking filler in the spaces. A plastic-coated steel strip is then spirally wrapped and extruded with a polyethylene sheath. The cable is finished by the longitudinal wrapping of a double-sided plastic-coated steel strip, also extruded with a polyethylene sheath.



### **Product Details**





#### **Product Features**

Maintains high mechanical integrity and temperature uniformity. Surrounded by a strong, hydrolysis-resistant tube. Enhanced with a proprietary filling compound for fiber security. Covered by a polyethylene sheath that wards off UV damage. Displays extraordinary crush resistance, suitable for both duct and burial. Centered on a single steel wire for core strength. Incorporates a special filling compound for fiber optic safeguarding.


Fully filled to negate the presence of air bubbles. Equipped with a water-blocking tape to prevent downward sinking.

## **Product Paraments**

Fiber count	Structure	ľ	Loose tube diameter(	CSM diameter/pa d diameter		Thickness of outer iacket	Cable diamet er(mm	Weigh
Count		tube	mm)	(mm)	(mm)	(mm)	)	m)
4	1+6	4	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	164
6	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	164
8	1+6	4	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	164
12	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	164
18	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	165
24	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	165
30	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	166
36	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	166
48	1+6	12	2.0+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	13.8 ± 0.5	191
60	1+6	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	13.8 ± 0.5	191
72	1+6	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	13.8 ± 0.5	192
84	1+7	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	14.7 ± 0.5	218
96	1+8	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	15.4 ± 0.5	234
108	1+9	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	16.1 ± 0.5	253
120	1+10	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	16.8 ± 0.5	272
132	1+11	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	17.4 ± 0.5	293
144	1+12	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	18.2 ± 0.5	317
288	1+9+15	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	20.1 ± 0.5	383

# Learn more about our company and factory



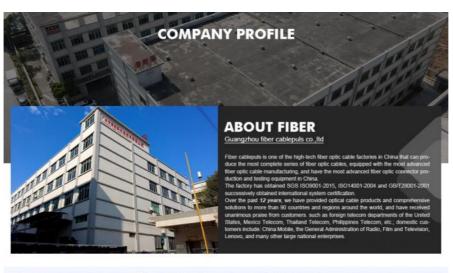



## **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**





## **HOT-SALE PRODUCT**





### **FAQ**

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market (100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality?

Always a pre-production sample before mass production;

Always final Inspection before shipment;

3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders just contact us and give me your design we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF; Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese





cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province, China