GYFTS53 Fiber Optic Direct Buried Cable Stranded Loose Tube Non Metallic

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: GYFTS53 Model Number: • Minimum Order Quantity: 2km • Price: negotiate

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



Product Specification

• Type: GYFTS53 Moisture Resistant: Yes

-40°C To 90°C . Temperature Rating: Application: Underground

Jacket Material: PΕ • Fiber Count: 72 Cores

. Highlight: Loose Tube Direct Buried Cable,

Stranded Tube Direct Buried Cable, Non Metallic Direct Burial Wire



More Images



Our Product Introduction

Product Description

GYFTS53 Fiber Optic Cable Stranded Loose Tube Non-Metallic Strength Member


Product description

At the core of the GYFTS53 cable is an FRP rod that serves as the central strength member. The cable's core is tightly wound with a loose tube and filler rope to form a compact, round structure, with water-blocking filler filling any gaps. A plastic-coated steel strip is spirally wrapped and then sheathed in polyethylene. The cable is finished by the longitudinal wrapping of a double-sided plastic-coated steel strip, also extruded with a polyethylene sheath.



Product Details





Product Features

Ensures outstanding mechanical performance and temperature resistance. Houses a high-strength, hydrolysis-resistant tube.

Incorporates a unique filling compound for fiber optic security.

Covered with a polyethylene sheath that resists UV exposure.

Capable of withstanding significant compression, suitable for duct and burial. Anchored by a single steel wire for central strength.

Utilizes a special filling compound for fiber optic defense.

Fully filled to eliminate any air pockets.


Features a water-blocking tape to inhibit sinking during vertical installation.

Product Paraments

Fiber count	Structure	Fibers per tube	Loose tube diameter(mm)	CSM diameter/pa d diameter (mm)		Thickness of outer jacket (mm)	Cable diamet er(mm)	Weigh
4	1+6	4	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	164
6	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	164
8	1+6	4	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	164
12	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	164
18	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	165
24	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	165
30	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	166
36	1+6	6	1.7+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	12.8 ± 0.5	166
48	1+6	12	2.0+0.1	1.8 /1.8	0.9 ± 0.1	1.8 ± 0.1	13.8 ± 0.5	191
60	1+6	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	13.8 ± 0.5	191
72	1+6	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	13.8 ± 0.5	192
84	1+7	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	14.7 ± 0.5	218
96	1+8	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	15.4 ± 0.5	234
108	1+9	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	16.1 ± 0.5	253
120	1+10	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	16.8 ± 0.5	272
132	1+11	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	17.4 ± 0.5	293
144	1+12	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	18.2 ± 0.5	317
288	1+9+15	12	2.0+0.1	2.0/2.0	0.9 ± 0.1	1.8 ± 0.1	20.1 ± 0.5	383

Learn more about our company and factory



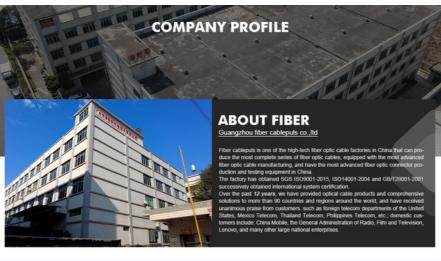



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





HOT-SALE PRODUCT





FAQ

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality?

Always a pre-production sample before mass production;

Always final Inspection before shipment;

3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF; Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese





+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province, China