



ASU Fiber Optic Cable G652D Non-Metallic Aerial Outdoor Cable

Our Product Introduction

for more products please visit us on fiberoptical-cables.com

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISSGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ASU-8b1.3
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25 days
- Payment Terms: 30% TT as deposit, 70% Balance before shipping
- Supply Ability: 100km




Product Specification

- Type: ASU-8b1.3
- Fiber Type: Single-mode
- Useful: FTTX
- Jacket: Single Jacket
- Out Sheath Material: PE
- Diameter: 7-8mm
- Number Of Conductors: 2,4,8,12
- Applications: Overhead
- Span Distance: 80m/100m/120m
- Highlight: **g652d fiber optic cable, g652d optic fiber cable, aerial fiber optic cable**



More Images



Product Description


ASU Fiber Optic Cable Mini ADSS Cable G652D Non-Metallic Aerial Outdoor Cable

Product Attributes

Attribute	Value
Type	ASU-8b1.3
Fiber Type	Single-mode
Useful	FTTX
Jacket	Single Jacket
Out Sheath Material	PE
Diameter	7-8mm
Number Of Conductors	2,4,8,12
Applications	Overhead
Span Distance	80m/100m/120m

Product Description

The ASU Cable, Self-Supported Optical Cable, is designed for linking devices, suitable for both urban and rural deployments over distances of 80 or 120 meters. Equipped with a FRP strength member for traction, it mitigates the risk of electrical discharges and is straightforward to install, eliminating the necessity for stringing or earthing.

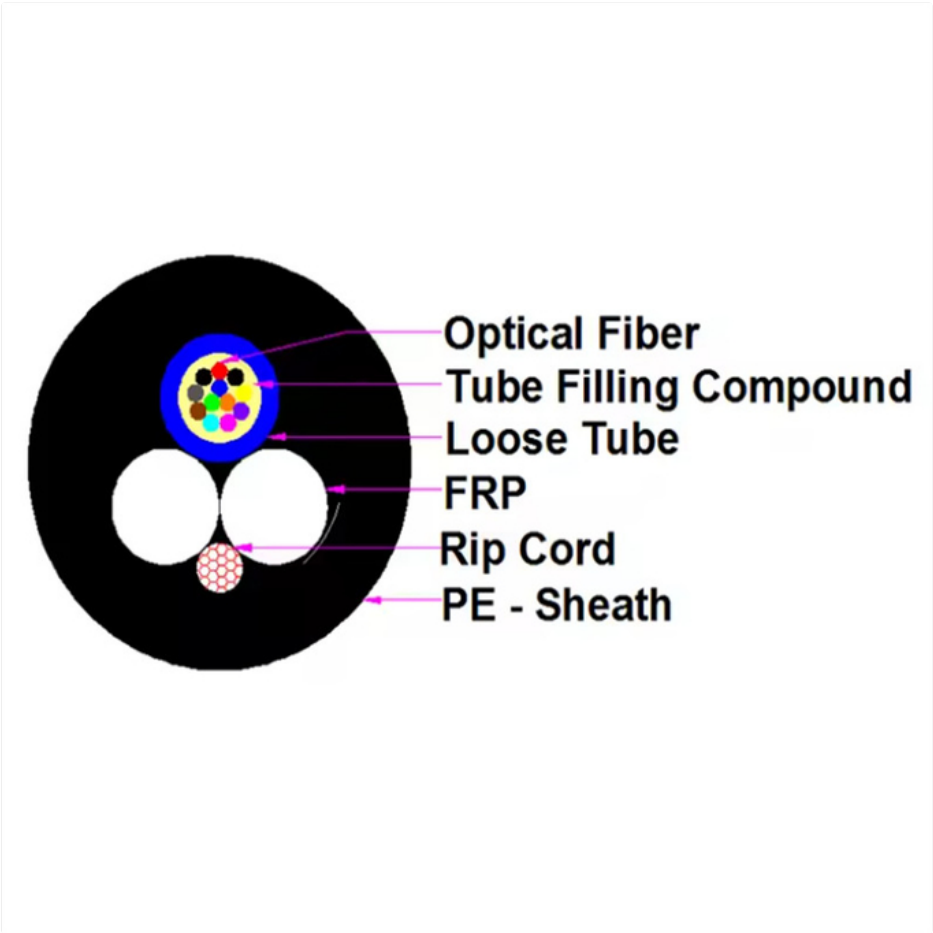



Cable Structure

- PE Protective Shell:** Enhances resistance to environmental stress and extends service life.
- FRP Tension Elements:** Provide non-conductive support and electrical safety.
- Installation Facilitator Cord:** Enables quick and smooth cable deployment.
- Fiber Buffering Compound:** Protects fibers from damage and eases installation.
- Loose Inner Tubing:** Provides a buffer zone for fibers, enhancing protection and flexibility.
- Signal-Carrying Fibers:** Essential components for optimal light signal transmission.

Product Parameters

Item	Parameters
Loose tube	Material: PBT
Central Strength Member	Material: FRP
Outer jacket	Out Diameter: 6.8±0.2 Material: HDPE - UV protection Color: Black

Factory Images

COMPANY PROFILE



ABOUT FIBER

Guangzhou fiber cablepls co.,ltd


Fiber cablepls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers. such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM

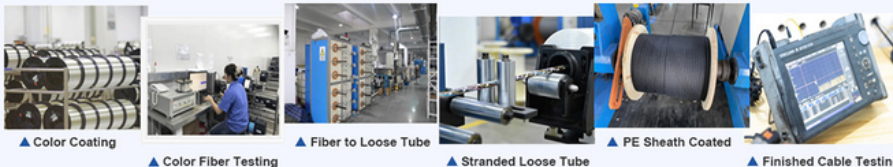

▲ Color Coating

▲ Color Fiber Testing

▲ Fiber to Loose Tube

▲ Stranded Loose Tube

▲ PE Sheath Coated

▲ Finished Cable Testing



HOT-SALE PRODUCT



CERTIFICATES



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International Guangzhou city, Guangdong province, China