



ASU optic cable best selling cable aerial all dielecric self supporting cable

Basic Information

Place of Origin: GUANGZHOU/CHINABrand Name: PUNAISGD/CABLEPULS

Certification: ISO/CE/ROSH

Model Number: ASUMinimum Order Quantity: 2kmPrice: negotiate

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



Product Specification

• Type: ASU

• Fiber Type: Single-mode

Mode: Singlemode G652D

• Useful: FTTX

Jacket: Single Jacket

• Uv Resistance: Yes

• Highlight: g652d duct fiber optic cable,


g652d outdoor fiber optic cable



More Images



ASU Outdoor Optic Fiber Cable

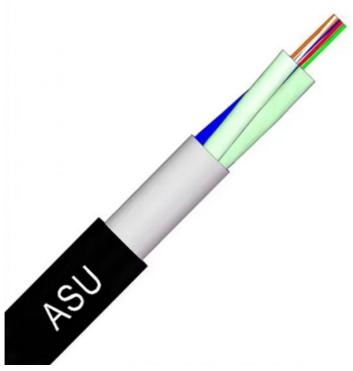

The ASU Cable, being a Self-Supported Optical Cable, facilitates device connectivity, perfect for urban and rural network installations with lengths of 80 or 120 meters. Its FRP strength member acts as a non-conductive load-bearing component, preventing electrical discharges, and it's user-friendly for installation, doing away with the need for guy wires or grounding

Product Details




Cable structure

- 1. Polyethylene Outer Layer: The cable is shielded by a polyethylene outer layer, which protects it from environmental impacts and extends its durability.
- 2.FRP Load-Bearing Members: The cable is equipped with FRP load-bearing members that provide structural integrity and prevent electrical discharges.
- 3.Ease-of-Installation Cord: An ease-of-installation cord is included for a hassle-free and expedited cable deployment. 4.Fiber Protection Gel: The fiber protection gel within the cable serves to safeguard the fibers and facilitate a smoother installation.
- 5. Adaptable Inner Tubing: The adaptable inner tubing of the cable allows for fiber movement, ensuring the fibers' safety and ease of installation.
- 6.Light Transmission Fibers: The light transmission fibers are the core of the cable, designed for efficient light signal propagation across extensive distances.

Product Paraments

Item		Parameters
Loose tube	Material	PBT
Central Strength Member	Material	FRP
	Out Diameter	6.8±0.2
Outer jacket	Material	HDPE -UV protection
Cator jacket	Color	Black

More About Our Factory

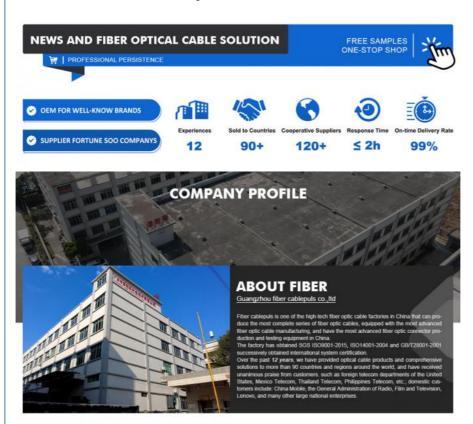









OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





HOT-SALE PRODUCT

































TRUCK LOADING



GOODS RECEIPT

FAQ

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment;

3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF; Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese



+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China