# ASU All Dielectric Fiber Optic Cable Outdoor Mini ADSS Singlemode

### **Basic Information**

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification:

ASU Model Number: • Minimum Order Quantity: 2km • Price: negotiate

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



# **Product Specification**

ASU . Type:

• Fiber Type: Single-mode Mode: Singlemode G652D

FTTX · Useful:

Jacket: Single Jacket

• Outer Sheath Material:

. Highlight: ASU All Dielectric Fiber Optic Cable,

Outdoor All Dielectric Fiber Optic Cable, Mini All Dielectric Fiber Optic Cable



# More Images




### **ASU All Dielectric Fiber Optic Cable Outdoor Mini ADSS**


### **Product Specifications**

Attribute	Value
Туре	ASU
Fiber Type	Single-mode
Mode	Singlemode G652D
Useful	FTTX
Jacket	Single Jacket
Outer Sheath Material	PE

### **Product Overview**

The ASU Cable is a Self-Supported Optical Cable designed for device interconnectivity, suitable for both urban and rural environments with spans of 80 or 120 meters. Featuring an FRP strength member for traction, it prevents electrical discharges and simplifies installation without the need for stringing or grounding.

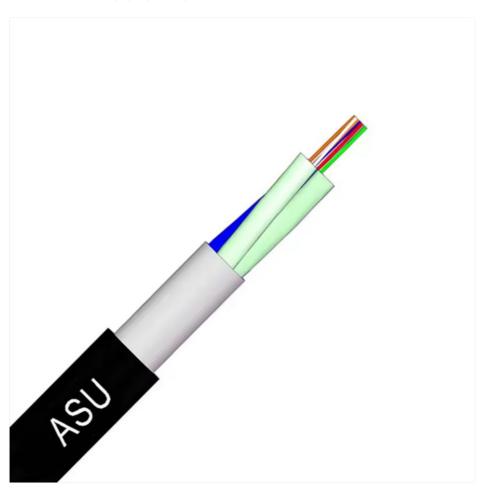

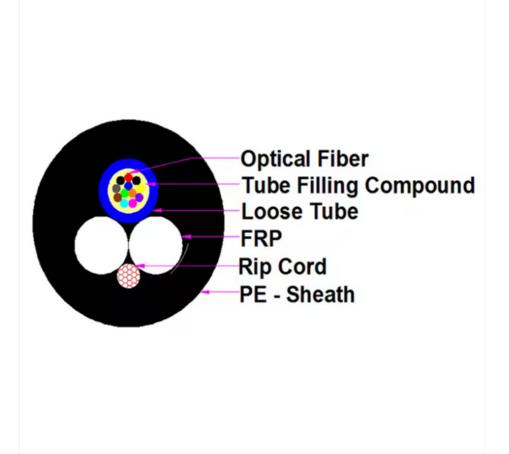



#### **Cable Structure**

 $\textbf{PE Outer Coating:} \ \textbf{Provides protection against environmental factors and extends cable lifespan.}$ 

FRP Structural Members: Non-conductive strength components within the cable.

Installation Aid Cord: Simplifies cable deployment for more efficient installation.

Fiber Shielding Gel: Protects fibers from abrasion and facilitates installation.

Flexible Protective Tubing: Allows fiber movement, enhancing durability and ease of installation.


**Data-Carrying Fibers:** High-performance components for reliable light signal transmission.

### **Technical Parameters**

Item	Parameters
Loose tube	Material: PBT
Central Strength Member	Material: FRP
Outer jacket	Out Diameter: 6.8±0.2
	Material: HDPE - UV protection
	Color: Black

### **Manufacturing Facility**



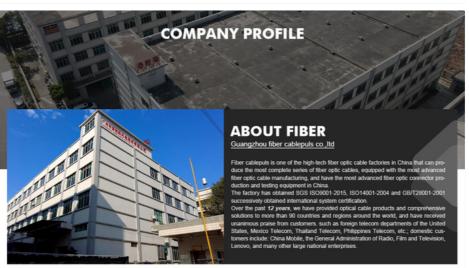



# **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**





# **HOT-SALE PRODUCT**





### TRANSPORT&PAY

































SHIPMENT

**PACKAGING** 

TRUCK LOADING →

**GOODS RECEIPT** 

### **Frequently Asked Questions**

### Why choose us?

markets.

#### How can we guarantee quality?

We conduct pre-production samples before mass production and final inspection before shipment.

#### Can you send products to my country?

Yes, we can. If you don't have your own shipping forwarder, we can assist with logistics.

#### Can you do OEM for me?

We accept all OEM orders. Contact us with your design for a reasonable quote and sample production.

#### What services can we provide?

Accepted Delivery Terms: FOB, CIF, EXW

Accepted Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF Accepted Payment Type: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow

Language Spoken: English, Chinese





+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province, China