



ASU All Dielectric Fiber Optic Cable Outdoor Mini Adss

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:
- GUANGZHOU/CHINA PUNAISGD/CABLEPULS ISO/CE/ROSH ASU 2km negotiate Wooden Spool /drum 5-25 days 30% TT as deposit, 70% Balance before shipping



Product Specification

- Type:
- Fiber Type:
- Mode:
- Useful:
- Jacket:
- Outer Sheath Material:
- Highlight:

ASU
Single-mode
Singlemode G652D
FTTX
Single Jacket
PE

100km


ASU All Dielectric Fiber Optic Cable, Outdoor All Dielectric Fiber Optic Cable, Mini All Dielectric Fiber Optic Cable



More Images




ASU Fiber Optic Cable Wholesale Outdoor All Dielectric Cable Mini Adss ASU Outdoor Optic Fiber Cable

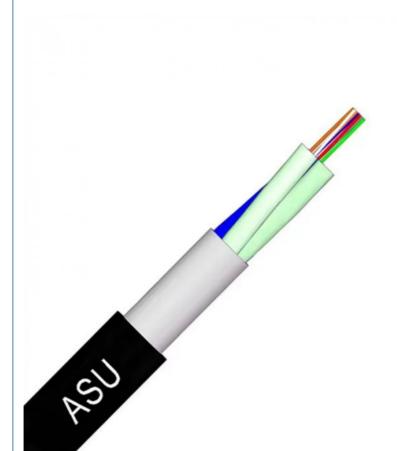

The ASU Cable, a Self-Supported Optical Cable, is created for device interconnectivity, appropriate for use in both city and countryside environments with spans of 80 or 120 meters. Featuring a FRP strength member for traction, it prevents electrical discharges and is effortless to install, negating the need for stringing or grounding.

Product Details

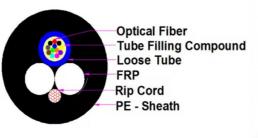



Cable structure

1.PE Outer Coating: The cable is coated with a PE outer coating that offers protection against environmental factors and increases its lifespan.

2.FRP Structural Members: FRP structural members are used within the cable to provide non-conductive strength. 3.Installation Aid Cord: The installation aid cord is a feature that simplifies the cable's deployment, making the process more efficient.

4. Fiber Shielding Gel: A fiber shielding gel is included to protect the fibers from abrasion and to ease the installation process. 5. Flexible Protective Tubing: The flexible protective tubing within the cable allows for fiber movement, enhancing the fibers'

durability and ease of installation. 6.Data-Carrying Fibers: The data-carrying fibers are the key components for transmitting light signals, ensuring high performance across the network.

Product Paraments

Item		Parameters
Loose tube	Material	PBT
Central Strength Member	Material	FRP
	Out Diameter	6.8±0.2
Outer jacket	Material	HDPE -UV protection
	Color	Black

More About Our Factory





OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



Color Fiber Testing

A Stranded Loose Tube

A Finished Cable Testing



HOT-SALE PRODUCT







FAQ

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment;

3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF; Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow; Language Spoken:English,Chinese

guangzhou fiber cablepuls co Itd				
Q	+8613687956390	cotton@fibercablepuls.com	e fiberoptical-cables.com	
925-926, E	Building B1, No. 2 Chuan	ghui Avenue, Yonghe Yushan Inter province,China	nationalGuangzhou city,Guangdong	