# **ASU Outdoor Fiber Optic Cable Aerial Self Supporting With FRP Strength** Member

## **Basic Information**

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification:

ASU Model Number: • Minimum Order Quantity: 2km • Price: negotiate

Wooden Spool /drum Packaging Details:

• Delivery Time: 5-25 days

• Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



## **Product Specification**

ASU • Type:

• Fiber Type: Single-mode Mode: G652D FTTX · Useful: PΕ · Outer Jacket: • Fiber: G652D

• Highlight: Outdoor Fiber Optic Cable Aerial,

FRP Fiber Optic Cable, **Self Supporting ASU Cable** 




# More Images



# ASU Fiber Optic Cable Aerial Self Supporting Cable With FRP Strength Member

## **ASU Outdoor Optic Fiber Cable**

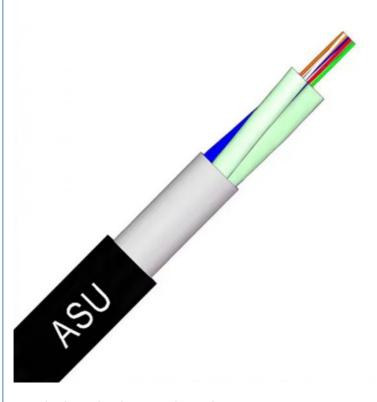

The ASU Cable, Self-Supported Optical Cable, is intended for device linkage, fitting for installation in both urban and rural networks with spans of 80 or 120 meters. Its FRP strength member serves as a tension element, avoiding electrical discharges, and it's simple to install, eliminating the need for support ropes or grounding measures.

## **Product Details**



#### Cable structure

- 1.Polyethylene Envelope: The cable is enveloped in a polyethylene material, which offers a protective barrier against environmental factors and enhances its endurance.
- 2.FRP Tensile Members: The cable incorporates FRP tensile members that provide non-conductive support.
- $3. Installation \ Expediter \ Cord: An installation \ expediter \ cord \ is \ featured \ for \ a \ swift \ and \ uncomplicated \ cable \ installation.$
- 4. Fiber Cushioning Gel: The fiber cushioning gel within the cable is designed to protect the fibers and facilitate a smoother installation.
- 5.Adjustable Inner Tubing: The adjustable inner tubing of the cable accommodates fiber movement, ensuring the fibers'

safety and ease of installation.


6.Communication Fibers: The communication fibers are the essential elements for light signal transmission, ensuring optimal performance across the network.

## **Product Paraments**

Item		Parameters
Loose tube	Material	PBT
Central Strength Member	Material	FRP
	Out Diameter	6.8±0.2
Outer jacket	Material	HDPE -UV protection
Outer jacket	Color	Black

# **More About Our Factory**



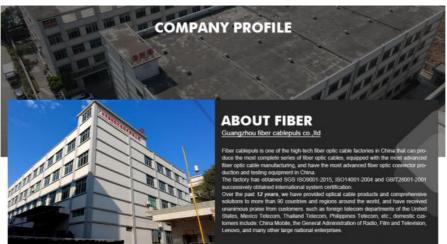









## **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**





## **HOT-SALE PRODUCT**

































TRUCK LOADING



**GOODS RECEIPT** 

**FAQ** 

## 1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

#### 2. how can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment;

#### 3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

#### 4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design we will offer you a reasonable price and make samples for you.

## 5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF; Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese



+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China