



# Singlemode Overhead Outdoor Fiber Optic Cable Aerial GYXTW

#### **Basic Information**

Place of Origin: GUANGZHOU/CHINABrand Name: PUNAISGD/CABLEPULS

Certification: ISO/CE/ROSH
Model Number: GYXTW
Minimum Order Quantity: 2km

Price: negotiatePackaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

• Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



## **Product Specification**

Armour Material: Corrugated Steel Tape Armoured

Core: 2~24 Core
Fiber Mode: Single Mode
Strength Member Material: Steel Wire

Single Armour Material: Corrugated Aluminium Tape

Outer Jacket Materail: PE

• Highlight: Overhead Outdoor Fiber Optic Cable,

Singlemode Outdoor Fiber Optic Cable, Outdoor Fiber Optic Cable GYXTW



## More Images




# **Singlemode Ouverhead Cable For Aerial Cable GYXTW Fiber Optic Cable Product Description**



A reinforced Uni-Tube fiber optic cable, featuring a single jacket and armor, houses fibers within a slack buffer tube. The central part of the cable is safeguarded by a corrugated steel tape armor, which is then encapsulated by a black polyethylene outer sheath. The cable also includes two integrated steel wires to maintain the necessary tension.

#### **Product Construction**

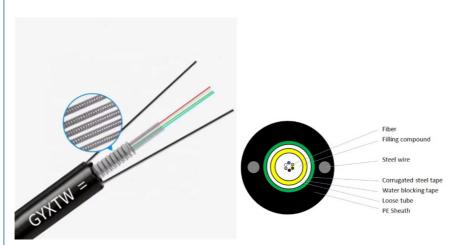

### **Product Construction**

### Fiber:

2-24 fibers

Uni-loose tube gel-filled

#### Armor:

Corrugated steel tape

## Strength Member:

Embedded steel wire

#### OuterJacket:

Black UV-and moisture-resistant polyethylene (PE).

#### **Features**

The Uni-tube is crafted with a gel-filled interior for top-tier fiber protection.

The cable is armored with steel tape to safeguard against rodent damage and mechanical stress.

The inclusion of embedded steel wires enhances the cable's tensile strength and ability to withstand crushing.

The cable's compact profile simplifies the installation process.


It is engineered to be resistant to ultraviolet exposure and moisture intrusion.

### **Product Paramenters**

Fib er cou nt	uct	Fiber s per tube	i fiine	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mnm)		Cableweig ht (kg/km)
2	1	2	1.7±0.1	1.0/1.0	1.6	8.0±0.2	57
4	1	4	1.85±0.1	1.0/1.0	1.6	8.0±0.2	58
6	1	6	1.9±0.1	1.0/1.0	1.6	8.0±0.2	58
8	1	8	2.0±0.1	1.0/1.0	1.6	8.0±0.2	60
12	1	12	2.2±0.1	1.0/1.0	1.6	8.0±0.2	60

## **Company Profile**



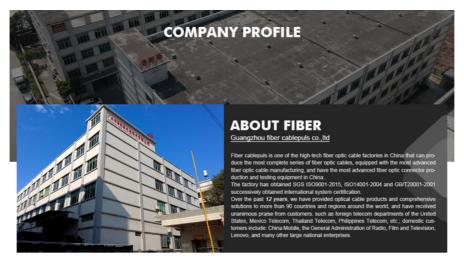



## **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**






## **HOT-SALE PRODUCT**





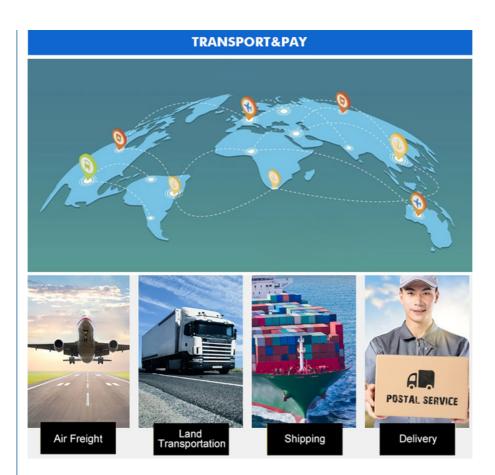









And More.....



















SHIPMENT

**PACKAGING** 

TRUCK LOADING

**GOODS RECEIPT** 

### **FAQ**

#### 1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market (100.00%). There are total about 11-50 people in our factory.

#### 2. how can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment;

#### 3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

#### 4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

#### 5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF;

Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese



+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China