



Basic Information

Place of Origin: GUANGZHOU/CHINABrand Name: PUNAISGD/CABLEPULS

Certification: ISO/CE/ROSH
Model Number: GYXTW
Minimum Order Quantity: 2km

• Price: negotiate

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

• Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



Product Specification

Armour Material: Corrugated Steel Tape Armoured

Core: 2~24 Core
Fiber Mode: Single Mode
Strength Member Material: Steel Wire

Single Armour Material: Corrugated Aluminium Tape

Outer Jacket Materail: PE

• Highlight: Steel Tape Armoured Aerial Cable,

Aerial GYXTW Fiber Optic Cable, Armoured GYXTW Fiber Optic Cable



More Images



Our Product Introduction


Product Description

Steel Tape Armoured Aerial Cable 4 12 Cores G652D GYXTW Fiber Optic Cable **Product Description**



The Uni-Tube fiber optic cable, designed with a solitary jacket and armor, positions its fibers in a loose buffer tube. It is fortified by a corrugated steel tape for armoring and is sheathed in a black polyethylene outer layer. The cable is equipped with two embedded steel wires to ensure the correct tension.

Product Construction

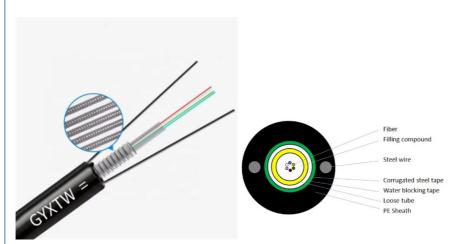

Product Construction

Fiber:

2-24 fibers

Uni-loose tube gel-filled

Armor:

Corrugated steel tape

Strength Member:

Embedded steel wire

OuterJacket:

Black UV-and moisture-resistant polyethylene (PE).

Features

A gel-infused Uni-tube construction offers enhanced fiber protection.

The cable is equipped with steel tape armor, which is effective against rodent attacks and mechanical impacts.


Embedded steel wires within the cable contribute to its desirable tensile strength and crush resistance. The cable's compact design ensures ease of installation. It features a UV and moisture-resistant design for durability.

Product Paramenters

Fib	Str	Fiber	Loose	CSM	Nominal	Cable	Cableweig
er		s per	tube	diameter/pad	Thickness of	diameter	ht
cou		tube	diameter(diameter	outer jacket	/ Height	(kg/km)
nt	Li C	labe	mm)	(mm)	(mnm)	(m)	(Rg/RIII)
2	1	2	1.7±0.1	1.0/1.0	1.6	8.0±0.2	57
4	1	4	1.85±0.1	1.0/1.0	1.6	8.0±0.2	58
6	1	6	1.9±0.1	1.0/1.0	1.6	8.0±0.2	58
8	1	8	2.0±0.1	1.0/1.0	1.6	8.0±0.2	60
12	1	12	2.2±0.1	1.0/1.0	1.6	8.0±0.2	60

Company Profile



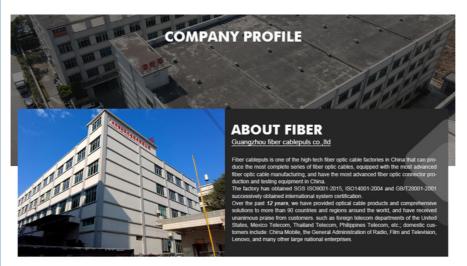



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM






HOT-SALE PRODUCT





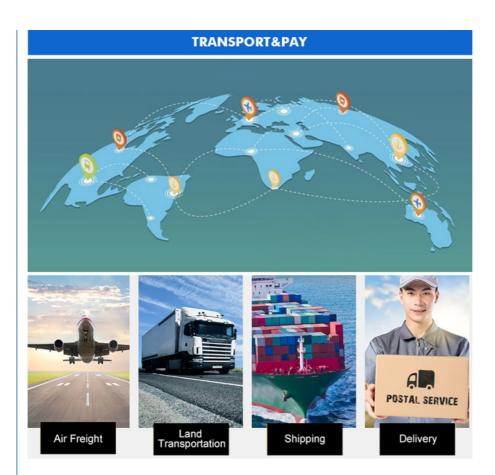









And More.....



















SHIPMENT

PACKAGING

TRUCK LOADING

GOODS RECEIPT

FAQ

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market (100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment;

3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF;

Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese



+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China