# **Basic Information**

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: **GYXTW** Model Number: • Minimum Order Quantity: 2km • Price:

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

negotiate

shipping

100km . Supply Ability:



# **Product Specification**

Armour Material: Corrugated Steel Tape Armoured

· Core: 2~24 Core Single Mode • Fiber Mode: • Strength Member Material: Steel Wire

• Single Armour Material: Corrugated Aluminium Tape

• Outer Jacket Materail:

. Highlight: Armoured Outdoor Fiber Optic Cable,

**GYXTW Outdoor Fiber Optic Cable**, **Central Loose Tube Aerial Cable** 



# More Images




Our Product Introduction

# Outdoor Armoured Aerial Cable Central Loose Tube GYXTW Fiber Optic Cable Product Description



A single-jacketed and single-armored Uni-Tube fiber optic cable has its fibers loosely arranged in a buffer tube. The cable's core is shielded by a steel tape armor that is corrugated and then covered with a black polyethylene jacket. Two steel wires are embedded within to provide the desired tension.

# **Product Construction**

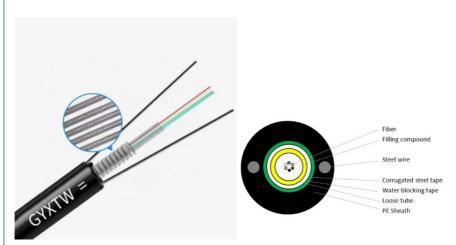

# **Product Construction**

#### Fiber:

2-24 fibers

Uni-loose tube gel-filled

# Armor:

Corrugated steel tape

#### Strength Member:

Embedded steel wire

#### OuterJacket:

Black UV-and moisture-resistant polyethylene (PE).

#### **Features**

The Uni-tube's gel-filled structure provides superior fiber safeguarding.

It is fortified by steel tape armor, which defends against rodent incursions and mechanical harm.

The presence of embedded steel wires imparts the necessary tensile strength and crush resistance.

The cable's compact form factor facilitates straightforward installation.


The design is crafted to be resistant to ultraviolet rays and moisture.

# **Product Paramenters**

Fib	Str	Fiber	Loose	CSM	Nominal	Cable	Cableweig
er		s per	tube	diameter/pad	Thickness of	diameter	ht
cou		tube	diameter(	diameter	outer jacket	/ Height	(kg/km)
nt	Li C	labe	mm)	(mm)	(mnm)	(m)	(Rg/RIII)
2	1	2	1.7±0.1	1.0/1.0	1.6	8.0±0.2	57
4	1	4	1.85±0.1	1.0/1.0	1.6	8.0±0.2	58
6	1	6	1.9±0.1	1.0/1.0	1.6	8.0±0.2	58
8	1	8	2.0±0.1	1.0/1.0	1.6	8.0±0.2	60
12	1	12	2.2±0.1	1.0/1.0	1.6	8.0±0.2	60

# **Company Profile**



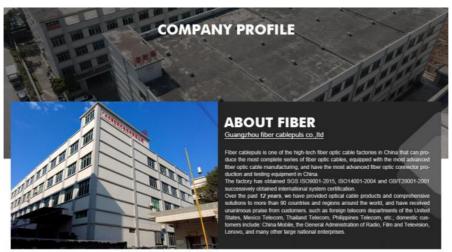



# **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**






# **HOT-SALE PRODUCT**





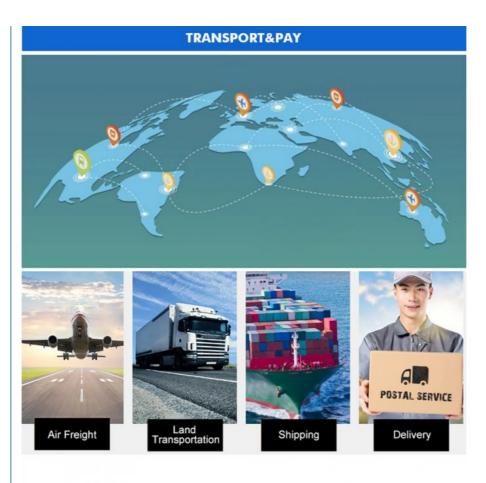





























SHIPMENT

PACKAGING - TRUCK LOADING

**GOODS RECEIPT** 

# **FAQ**

#### 1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market (100.00%). There are total about 11-50 people in our factory.

#### 2. how can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment;

# 3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

# 4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

# 5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF;

Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese



+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China