# Armoured Aerial Outdoor Fiber Optic Cable GYXTW 2-24 Core Single Mode

### **Basic Information**

Place of Origin: GUANGZHOU/CHINABrand Name: PUNAISGD/CABLEPULS

Certification: ISO/CE/ROSH
Model Number: GYXTW
Minimum Order Quantity: 2km
Price: negotiate

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

• Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



### **Product Specification**

Armour Material: Corrugated Steel Tape Armoured

Core: 2~24 Core
 Fiber Mode: Single Mode
 Strength Member Material: Steel Wire

Single Armour Material: Corrugated Aluminium Tape

Outer Jacket Materail: PE

• Highlight: Armoured Outdoor Fiber Optic Cable,

GYXTW Outdoor Fiber Optic Cable, Central Loose Tube Aerial Cable



### More Images



### Armoured Aerial Outdoor Fiber Optic Cable Central Loose Tube GYXTW

### **Product Specifications**

Armour Material	Corrugated Steel Tape Armoured
Core	2~24 core
Fiber Mode	Single Mode
Strength Member Material	Steel Wire
Single Armour Material	Corrugated aluminium tape
Outer Jacket Material	PE


### **Product Overview**



A single-jacketed and single-armored Uni-Tube fiber optic cable has its fibers loosely arranged in a buffer tube. The cable's core is shielded by a steel tape armor that is corrugated and then covered with a black polyethylene jacket. Two steel wires are embedded within to provide the desired tension.

### **Construction Details**





Fiber: 2-24 fibers, Uni-loose tube gel-filled

Armor: Corrugated steel tape

Strength Member: Embedded steel wire

Outer Jacket: Black UV-and moisture-resistant polyethylene (PE)

### **Key Features**

Gel-filled structure provides superior fiber protection

Steel tape armor defends against rodents and mechanical damage

Embedded steel wires provide tensile strength and crush resistance

Compact design for easy installation

UV-resistant and moisture-resistant construction


### **Technical Parameters**

Fiber	Stru ctur e	Fibers per tube	Loose tube diameter(mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mnm)	Cable diameter/ Height (m)	Cable weight (kg/km)
2	1	2	1.7±0.1	1.0/1.0	1.6	8.0±0.2	57
4	1	4	1.85±0.1	1.0/1.0	1.6	8.0±0.2	58

6	1	6	1.9±0.1	1.0/1.0	1.6	8.0±0.2	58
8	1	8	2.0±0.1	1.0/1.0	1.6	8.0±0.2	60
12	1	12	2.2±0.1	1.0/1.0	1.6	8.0±0.2	60

### **Company Information**



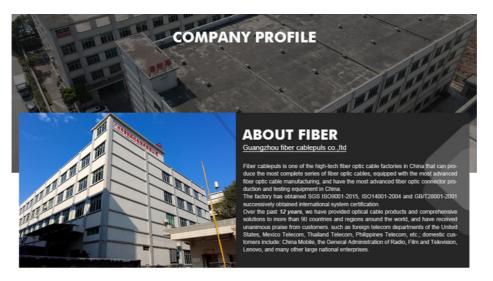







### **HOT-SALE PRODUCT**





# TRANSPORT&PAY

















And More....



















SHIPMENT

**PACKAGING** 

TRUCK LOADING

**GOODS RECEIPT** 

### **Frequently Asked Questions**

### Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

### How can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment.

### Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

### Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design. We will offer you a reasonable price and make samples for you.

### What services can we provide?

Accepted Delivery Terms: FOB, CIF, EXW

Accepted Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF Accepted Payment Type: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow

Language Spoken: English, Chinese

## guangzhou fiber cablepuls co ltd

+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China