GYXTW Steel Tape Armored Fiber Optic Cable 2-24 Core Single Mode

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: **GYXTW** Model Number: • Minimum Order Quantity: 2km • Price: negotiate

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



Product Specification

Armour Material: Corrugated Steel Tape Armoured

· Core: 2~24 Core • Fiber Mode: Single Mode • Strength Member Material: Steel Wire

• Single Armour Material: Corrugated Aluminium Tape

• Outer Jacket Materail:

. Highlight: FTTX Outdoor Drop Cable,

Armored Outdoor Drop Cable, **Armored GYXTW Fiber Optic Cable**



More Images



Product Description

FTTX Outdoor Drop Cable Steel Tape Armored GYXTW Fiber Optic Cable

Product Specifications

Armour Material	Corrugated Steel Tape Armoured
Core	2~24 core
Fiber Mode	Single Mode
Strength Member Material	Steel Wire
Single Armour Material	Corrugated aluminium tape
Outer Jacket Material	PE


Product Overview



The Uni-Tube fiber optic cable features a single jacket and armor design that encases fibers in a non-tight buffer tube. Armored with corrugated steel tape and finished with a durable black polyethylene outer jacket, this cable includes two embedded steel wires for optimal tension resistance.

Construction Details





Fiber: 2-24 fibers in Uni-loose tube gel-filled design

Armor: Corrugated steel tape protection

Strength Member: Embedded steel wire reinforcement

Outer Jacket: Black UV- and moisture-resistant polyethylene (PE)

Key Features

Superior fiber protection through gel-filled Uni-tube design

Steel tape armor prevents rodent damage and mechanical stress

Embedded steel wires provide tensile strength and crush resistance

Compact design for easy installation

UV-resistant and moisture-proof construction


Technical Parameters

Fiber count	Struc ture	Fibers per tube	Loose tube diameter(mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mnm)	Cable diameter/ Height (m)	Cable weight (kg/km)
2	1	2	1.7±0.1	1.0/1.0	1.6	8.0±0.2	57
4	1	4	1.85±0.1	1.0/1.0	1.6	8.0±0.2	58
6	1	6	1.9±0.1	1.0/1.0	1.6	8.0±0.2	58

8	1	8	2.0±0.1	1.0/1.0	1.6	8.0±0.2	60
12	1	12	2.2±0.1	1.0/1.0	1.6	8.0±0.2	60

Company Overview



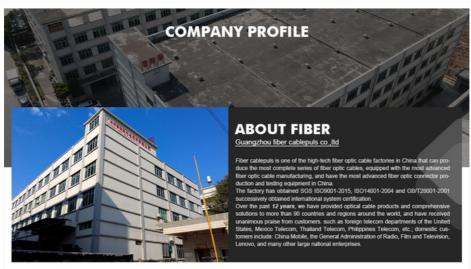



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





HOT-SALE PRODUCT





TRANSPORT&PAY













And More.....



















SHIPMENT

PACKAGING

TRUCK LOADING ⇒

GOODS RECEIPT

Frequently Asked Questions

Why choose us?

We are a manufacturer located in Guangzhou, China, operating since 2011. Our factory employs 11-50 people and we

primarily serve the domestic market.

How do we guarantee quality?

We conduct pre-production samples before mass production and perform final inspections before shipment.

Can you ship to my country?

Yes, we can ship worldwide. If you don't have your own forwarder, we can assist with shipping arrangements.

Do you offer OEM services?

We accept all OEM orders. Contact us with your design requirements and we'll provide competitive pricing and samples.

What services do you provide?

Delivery Terms: FOB, CIF, EXW

Payment Options: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow Accepted Currencies: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF

Languages: English, Chinese

guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China