# **GYTXW Outdoor Fiber Optic Cable Drop Cable 2 4 6 8 Cores Armored**

## **Basic Information**

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: **GYXTW** Model Number: • Minimum Order Quantity: 2km • Price: negotiate

· Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



## **Product Specification**

Armour Material: Corrugated Steel Tape Armoured

· Core: 2~24 Core • Fiber Mode: Single Mode • Strength Member Material: Steel Wire

• Single Armour Material: Corrugated Aluminium Tape

• Outer Jacket Materail:

. Highlight: **GYTXW Outdoor Fiber Optic Cable,** 

Outdoor Fiber Optic Cable Armored,

**GYTXW Fiber Drop Cable** 



## More Images




# High Quality 2 4 6 8 Cores Armored Drop Cable GYTXW Fiber Optic Cable Product Description



In the Uni-Tube fiber optic cable, which is single-jacketed and single-armored, fibers are situated in a relaxed buffer tube. The cable's core is protected by a corrugated steel tape armor, which is then covered by a black polyethylene outer jacket. Two steel wires are integrated to maintain the necessary tension.

## **Product Construction**

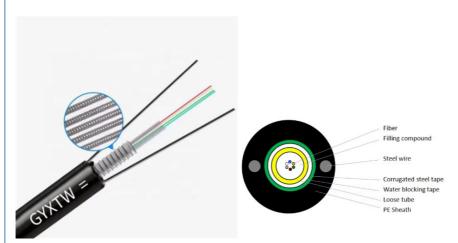

## **Product Construction**

#### Fiber:

2-24 fibers

Uni-loose tube gel-filled

## Armor:

Corrugated steel tape

#### Strength Member:

Embedded steel wire

#### OuterJacket:

Black UV-and moisture-resistant polyethylene (PE).

#### **Features**

The Uni-tube features a gel-filled construction for exceptional fiber protection.

It is protected by steel tape armor, which is designed to deter rodent attacks and shield against mechanical damage.

Embedded steel wires are included to offer the appropriate tensile strength and crush resistance.


The cable's compact design makes it simple to install. It is built to be impervious to UV radiation and moisture.

## **Product Paramenters**

File er co	uct	Fiber s per tube	Loose tube diameter( mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mnm)		Cableweig ht (kg/km)
2	1	2	1.7±0.1	1.0/1.0	1.6	8.0±0.2	57
4	1	4	1.85±0.1	1.0/1.0	1.6	8.0±0.2	58
6	1	6	1.9±0.1	1.0/1.0	1.6	8.0±0.2	58
8	1	8	2.0±0.1	1.0/1.0	1.6	8.0±0.2	60
12	! 1	12	2.2±0.1	1.0/1.0	1.6	8.0±0.2	60

## **Company Profile**



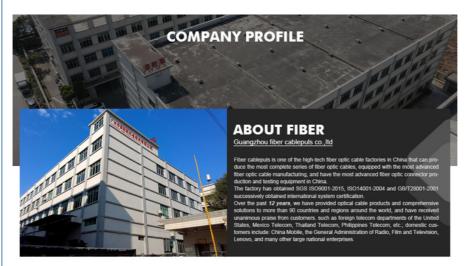



## **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**






# **HOT-SALE PRODUCT**





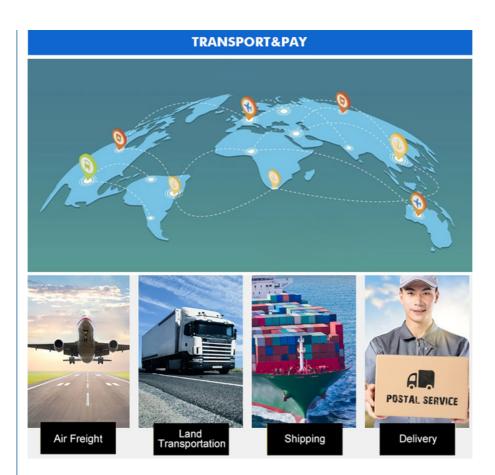









And More.....



















SHIPMENT

**PACKAGING** 

TRUCK LOADING

**GOODS RECEIPT** 

## **FAQ**

#### 1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market (100.00%). There are total about 11-50 people in our factory.

#### 2. how can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment;

## 3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

## 4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

## 5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF;

Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese



+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China