# Communication Outdoor Fiber Optic Cable GYTA Aluminum Strip Armoured Cable

#### **Basic Information**

Place of Origin: GUANGZHOU/CHINABrand Name: PUNAISGD/CABLEPULS

Certification: ISO/CE/ROSH

Model Number: GYTAMinimum Order Quantity: 2kmPrice: negotiate

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

• Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



#### **Product Specification**

• Item: GYTA

• Outdoor: Outdoor Fiber Optic Cable

• Fiber: G652D OR G652B

Jacket Material: PEStrength Member: SteelArmored: Aluminum

• Highlight: Aluminum Strip Armoured Cable,

Outdoor Fiber Optic Cable GYTA, Aluminum Strip Fiber Optic Cable



#### More Images



## GYTA Fiber Optic Cable Outdoor Armoured Aluminum Strip Communication Cable GYTA Outdoor Fiber Optical Cable


GYTA Armored Loose Tube Single Jacket/Single Armor fiber optic cables are engineered to deliver a high number of fibers while maintaining the adaptability and range of options necessary for the most challenging installations of the present day, such as those in ducts and subterranean channels.



#### Features:

- 1. The cables feature low dispersion and minimal attenuation for superior signal clarity.
- 2. They are designed with precision, controlling fiber excess length and stranding to enhance mechanical and environmental performance.
- 3. Armored with corrugated steel tape, the cables offer excellent moisture and crush resistance.
- 4. Their compact size and lightweight design make them easy to install.
- 5. They are rated for operation in temperatures ranging from -40°C to +60°C.

#### **Cable structure**

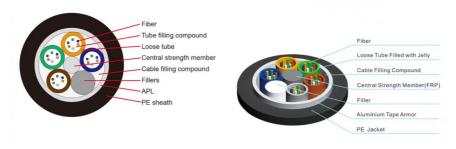

#### **GYTA Fiber Optic Cable**

- 1. Fiber:
- 2-288 fiber

Multi-loose tube gel-filled

2. Central Strength Member:

Fiberglass reinforced Platic (FRP) or steel wire.

3. Armor:

Aluminum Tape Armor

4. Outer Jacket:

Black UV Polyethylene(PE)


#### **Product Paramenters**

Fibe r coun t	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pa d diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/ Height (mm)	Cable weight (kg/km)
4	1+5	4	1.8±0.1	1.4/1.4	1.4	9.0±0.3	80
6	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80

8	1+5	8	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80
12	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80
24	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	85
36	1+6	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	100
48	1+5	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	105
60	1+5	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	110
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.6±0.3	122
96	1+8	12	2.2±0.1	1.6/3.5	1.6	12.0±0.3	160
144	1+12	12	2.2±0.1	2.0/6.4	1.8	15.6±0.3	240
216	1+6+12	12	2.2±0.1	2.2/2.2	1.8	16.0±0.3	270
288	1+9+15	12	2.2±0.1	2.2/4.3	2.0	18.2±0.3	282

### Learn more about our products and factory



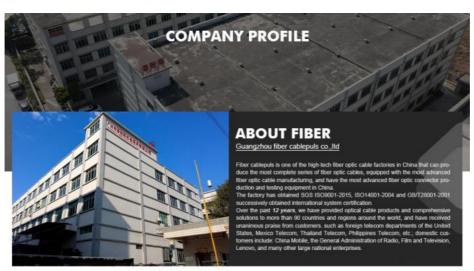



#### **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**





#### **HOT-SALE PRODUCT**





# TRANSPORT&PAY POSTAL SERVICE Land Air Freight Shipping Delivery Transportation And More... MONEY TRANSFER



#### 1. Why choose us?

SHIPMENT

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market (100.00%). There are total about 11-50 people in our factory.

TRUCK LOADING

**GOODS RECEIPT** 

#### 2. how can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment;

**PACKAGING** 

#### 3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

#### 4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

#### 5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF; Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese

## guangzhou fiber cablepuls co ltd

+8613687956390

cotton@fibercablepuls.com

e fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China