GYTA Outdoor Fiber Optic Cable 2-288 Cores Aluminum Armored PE Jacket

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification:

GYTA Model Number: • Minimum Order Quantity: 2km • Price: negotiate

 Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



Product Specification

GYTA Item:

• Outdoor: Outdoor Fiber Optic Cable

G652D OR G652B · Fiber:

PΕ · Jacket Material: · Strength Member: Steel Armored: Aluminum

• Highlight: **Duct GYTA Fiber Optic Cable,**

GYTA Underground Fiber Optic Cable,

Fiber Optic Cable 288 Cores



More Images



GYTA Fiber Optic Cable 2-288 Cores Duct Install Communication


Product Specifications

Attribute	Value	
Item	GYTA	
Outdoor	Outdoor Fiber Optic Cable	
Fiber	G652D OR G652B	
Jacket Material	PE	
Strength Member	Steel	
Armored	Aluminum	

Product Overview

The GYTA Armored Loose Tube Single Jacket/Single Armor fiber optic cables are designed to provide high fiber count with the flexibility and durability required for demanding installations, including duct and underground conduit applications.



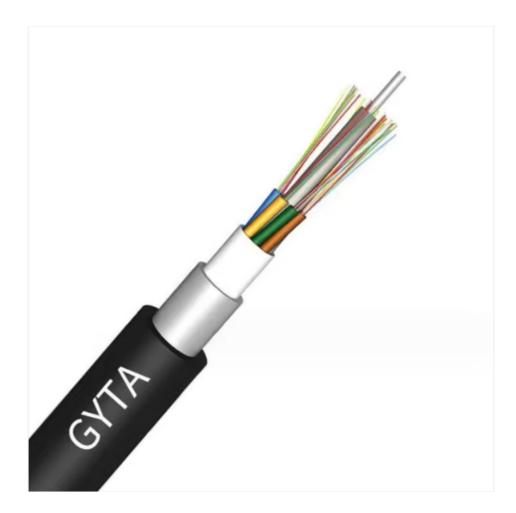

Key Features

Low dispersion and attenuation for clear signal transmission


Precision-engineered with controlled fiber length and unique stranding process for superior mechanical and environmental performance

Corrugated steel tape armor provides excellent moisture and crush resistance

Slim, lightweight design for easy installation

Wide operating temperature range from -40°C to +60°C

Cable Construction

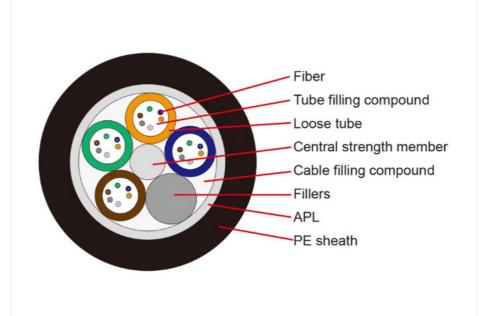

GYTA Fiber Optic Cable



Fiber: 2-288 fiber multi-loose tube gel-filled

Central Strength Member: Fiberglass reinforced plastic (FRP) or steel wire

Armor: Aluminum tape armor


Outer Jacket: Black UV Polyethylene (PE)

Technical Parameters

Fiber count	Struc ture	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal thickness of outer jacket (mm)	Cable diameter/height (mm)	Cable weight (kg/km)
4	1+5	4	1.8±0.1	1.4/1.4	1.4	9.0±0.3	80
6	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80
8	1+5	8	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80
12	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80
24	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	85
36	1+6	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	100
48	1+5	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	105
60	1+5	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	110
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.6±0.3	122
96	1+8	12	2.2±0.1	1.6/3.5	1.6	12.0±0.3	160
144	1+12	12	2.2±0.1	2.0/6.4	1.8	15.6±0.3	240
216	1+6+ 12	12	2.2±0.1	2.2/2.2	1.8	16.0±0.3	270
288	1+9+ 15	12	2.2±0.1	2.2/4.3	2.0	18.2±0.3	282

Manufacturing Facility



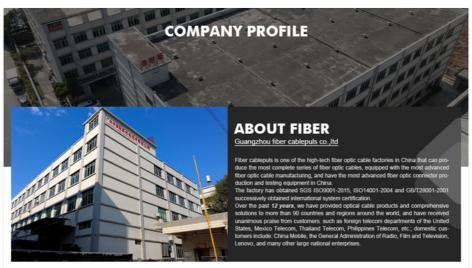







TRANSPORT&PAY



Frequently Asked Questions

Why choose us?

professionals dedicated to quality fiber optic cable production.

How can we guarantee quality?

We conduct pre-production sampling before mass production and perform final inspections before shipment to ensure product quality.

Can you send products to my country?

Yes, we can ship worldwide. If you don't have your own shipping forwarder, we can assist with logistics.

Can you do OEM for me?

We accept all OEM orders. Contact us with your design requirements and we'll provide competitive pricing and samples.

What services can we provide?

Accepted Delivery Terms: FOB, CIF, EXW

Accepted Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF Accepted Payment Type: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow

Languages Spoken: English, Chinese





+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China