

GYTA Fiber Optic Underground Duct Cable High Strength Jumper Cable

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- · Packaging Details:
- Delivery Time:
- Payment Terms:

GUANGZHOU/CHINA PUNAISGD/CABLEPULS

- Supply Ability:
- ISO/CE/ROSH GYTA 2km negotiate Wooden Spool /drum 5-25 days 30% TT as deposit, 70% Balance before shipping 100km



Product Specification

- Item:
- Outdoor:
- Fiber:
- Jacket Material:
- Strength Member:
- Armored:
- Highlight:

GYTA
Outdoor Fiber Optic Cable
G652D OR G652B
PE
Steel

- Aluminum
- Fiber Optic Underground Duct Cable, GYTA Underground Duct Cable, **GYTA Jumper Cable**



More Images



Product Description

GYTA Fiber Optic Cable Underground Duct Cable High Strength Jumper Cable GYTA Outdoor Fiber Optical Cable

GYTA Armored Loose Tube Single Jacket/Single Armor fiber optic cables are created to furnish a significant fiber count, coupled with the necessary pliability and adaptability for the most strenuous installations currently in demand, such as those in ducts and underground conduits.




Features:


The cables are characterized by low dispersion and attenuation for high-quality signal transmission.
They are crafted with precision, managing fiber excess length and stranding to achieve superior mechanical and environmental characteristics.

Armored with corrugated steel tape, the cables offer robust protection against moisture and crushing.
The cables are designed to be slim and lightweight, facilitating easy deployment.

5. They are suitable for operation in a wide range of temperatures, from -40°C to +60°C.

Cable structure





GYTA Fiber Optic Cable

Fiber:
2-288 fiber
Multi-loose tube gel-filled
Central Strength Member:
Fiberglass reinforced Platic (FRP) or steel wire.
Armor:
Aluminum Tape Armor
Outer Jacket:
Black UV Polyethylene(PE)


Product Paramenters

Fibe r coun t	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pa d diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/ Height (mm)	Cable weight (kg/km)
4	1+5	4	1.8±0.1	1.4/1.4	1.4	9.0±0.3	80
6	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80

8	1+5	8	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80
	1+5	0	1.9±0.1	1.4/1.4	1.4	9.0±0.3	00
12	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80
24	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	85
36	1+6	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	100
48	1+5	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	105
60	1+5	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	110
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.6±0.3	122
96	1+8	12	2.2±0.1	1.6/3.5	1.6	12.0±0.3	160
144	1+12	12	2.2±0.1	2.0/6.4	1.8	15.6±0.3	240
216	1+6+12	12	2.2±0.1	2.2/2.2	1.8	16.0±0.3	270
288	1+9+15	12	2.2±0.1	2.2/4.3	2.0	18.2±0.3	282

Learn more about our products and factory

	E)			ONE-STOP S	
OEM FOR WELL-KNOW BRANDS		15		•	
SUPPLIER FORTUNE 500 COMPANYS	Experiences	Sold to Countries	Cooperative Suppliers	Response Time	On-time Delivery Ra

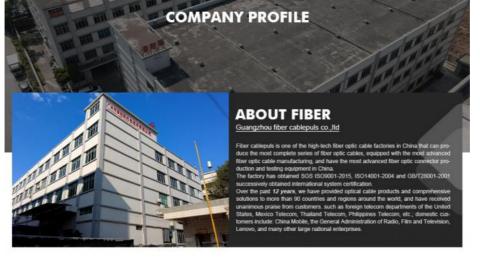



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



Color Fiber Testing

riber resting

Stranded Loose Tube

ated Finished Cable Testing



HOT-SALE PRODUCT







FAQ

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market (100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment;

3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF; Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow; Language Spoken:English,Chinese

