### ADSS Aerial Fiber Optic Cable G652.D 24 48 Core Single Mode 96 144 Core 4km/Drum

### **Basic Information**

• Place of Origin: GUANGZHOU/CHINA • Brand Name: PUNAISGD/CABLEPULS · Certification: ISO/CE/ROSH

ADSS-12b1.3 Model Number:

 Minimum Order Quantity: 2km • Price: 190

Packaging Details: Wooden Spool Φ1200\*750mm

• Delivery Time: 5-25days

30%TT as deposit,70%Balance before • Payment Terms:

shipping. 100km Supply Ability:




### **Product Specification**

• Cable Name: ADSS-12b1.3 • Cable Length: 2km-5km • Outer Sheath: PE And AT • Fiber No: 4 - 288 Fibers

Factory: Yes • Certifications: UL, RoHS, CE, ISO

• Fiber Type: Single-mode Or Multimode • Highlight: ADSS Aerial Fiber Optic Cable,

G652.D Aerial Fiber Optic Cable, 144 Core Aerial Fiber Optic Cable




Our Product Introduction

# Our Product Introduction

## **Product Description**

ADSS Fiber Optic Cable G652.D 24 48 Core Self-Supported Single Mode 96 144 Core Fiber Optical Cable 4km/Drum


96 144 Core Fiber Optical Cable 4km/Drum Aerial ADSS




ADSS cable is loose tube stranded. The 250um fibers are positioned in a loose tube. The tubes are filled with a water-resistant filling compound. The tubes(and the fillers) are stranded around a FRP

as a non-metallic central strength member into a compact and circular cable core. The cable core is covered with water blocking tape. After aramid yarn covered over the water blocking tape, the cable is completed with a PE outer sheath.

















### Characeristics

Small cable diameter (adapt for bad climate), light weight, low attached load on tower. Non-metal structure, good insulation, anti-thuner.
Fine production technology, even force for aramid yarn, with superior stress flexibility.

# **High quality PE/HDPE material**

cable sheath, very smooth surface, anti-UV, flame-Resistant






### ADSS Cable Place Order Information

A DOG GABIOT 1400 GTAGT INTO MALIGIT						
No. of Fibers	2-36	38-72	74-96	98-120	122-144	146-216
Max No. of Fibers/Tube	6	12	12	12	12	12
No. of Tube(+Fillers)	6	6	8	10	12	18(2 layers)
Nominal Diameter	10.7	13.2	13.9	15.4	16.8	17
Cable Weight(kg/km)	89	135	150	185	220	225
Fiber Type	G652D G657A1 OM1 OM2 OM3 OM4					
Max .Allowable Tension	Short Term :3500N Long Term:100N MAT:3.5Kn RTS:9.0Kn Wind Speed: ≤30m/s Ics:0mm					
Min.Bend Radius (mm)	Dynamic:20D Static:10D (D: Cable diameter)					
Temperature Range	-40°C~+70°C(Transportation& Storage)					
	-35°C~+65°C(Installation)					
	-40°C~+70°C(Operation)					

Single Sheath ADSS Cable:

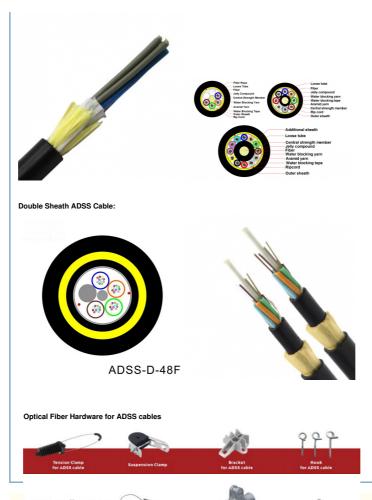





+8613687956390 cotton@fibercabl



### **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**





- How do I place an OEM or customized order?

  1) Send your purchase intention to our email: cotton@fibercablepuls.com

  2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.

  3) Sign the contract or Proforma Invoice.

  4) After receiving your deposit, we will start to arrange the production.

  5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China