ADSS Fiber Optic Cable G652D 96-144 Cores Self-Supported **Outdoor**

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification:

ADSS Model Number: • Minimum Order Quantity: 2km • Price: negotiate

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



Product Specification

• Type: **ADSS Optical Cable** Jacket: Double Jacket

FRP Strength Member • Strength Member:

• Fiber Counts: 1-144cores · Colour: Black . Warrenty: 2years


• Highlight: ADSS Outdoor Fiber Optic Cable,

G652D Outdoor Fiber Optic Cable,

96 Cores Outdoor Fiber Optic Cable



More Images



ADSS Outdoor Fiber Optic Cable G652D Self Supported 96 144 Cores 4KM/Drum

Product Attributes

Attribute	Value			
Туре	ADSS optical cable			
Jacket	Double Jacket			
Strength Member	FRP Strength member			
Fiber Counts	1-144cores			
Colour	Black			
Warranty	2 years			

Product Description

All-Dielectric Self-Supporting (ADSS) fiber-optic cables are designed for independent installation without requiring additional support mechanisms. Featuring a central conduit housing optical fibers encased in aramid fiber layers and protective outer sheath, these non-metallic cables are ideal for areas with high electrical interference.



Key Characteristics

- Reinforced with dielectric strength members, completely free of metallic components
- Specialized gel inside the tube provides vital fiber protection
- FRP central strength members with Dupont aramid yarn enhance durability
- Excellent attenuation levels with superior AT performance
- Stable performance across temperature variations with anti-aging properties

Product Images






Technical Parameters

NO. OF FIBER (CORES)	6/12/24	48	72	96	144	288
NO. OF FIBER (CORES)	1*6/2*6/4*6	6*8/4*12	6*12	8*12	12*12	24*12

FRP central strength member(mm)	2.0	2.0	2.5	2.8	3.7	2.6			
PE coated diameter	Nº	4.2	4.8	7.4					
Tear rope(inner sheath)	2	2	2	2	2	2			
Thickness of inner sheath(pe)	1.2	1.2	1.2	1.2	1.2	1.2			
Out diameter of inner sheath	10.0	10.0	10.0	10.0	10.0	10.9			
Reinforcing layer aramid	Domestic Aramid Yarns								
MAX. span(m)	50/100/120/150								
Thickness of outer sheath(pe)	1.8	1.8	1.8	1.8	1.8	1.8			
Out diameter of Pe sheath	9.5±0.5	10±0.5	12.2±0.5	13.9±0.5	17.1±0.5	20.2±0.5			
Climate condition	No ice, 25m/s max wind speed								

Factory Profile



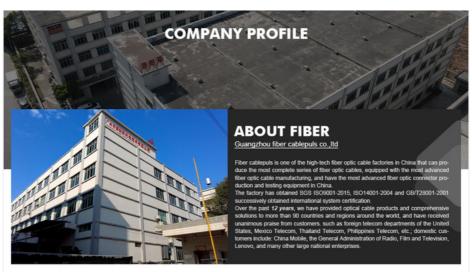







TRANSPORT&PAY



Frequently Asked Questions

SHIPMENT

1. Why choose us?

TRUCK LOADING

PACKAGING

GOODS RECEIPT

professionals.

2. How can we guarantee quality?

We conduct pre-production sampling before mass production and final inspection before shipment.

3. Can you send products to my country?

Yes, we can arrange shipping even if you don't have your own forwarder.

4. Can you do OEM for me?

We accept all OEM orders - contact us with your design for a competitive quote and samples.

5. What services can we provide?

Delivery Terms: FOB, CIF, EXW

Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF Payment Methods: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow

Languages: English, Chinese



+8613687956390

cotton@fibercablepuls.com



925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China