




Photoelectric Hybrid Fiber Cable Singlemode Multimode 36 48 86 144 288 Core

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD
- Certification: ISO/CE/ROSH
- Model Number: GYXTW 8b1.3 +RVV1.5mm
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- ITEM NO.: GYXTW 8B1.3 +RVV1.5mm
- Cooper Wire: 1.5 Mm²/2.5mm²
- Jacket Color: Black Or Customized
- Jacket Material: PE/LSZH
- Armored Type: Steel Tape
- Strength Member: Steel Wires
- Highlight: Photoelectric Hybrid Fiber Cable, 288 Core Hybrid Fiber Cable, Multimode Hybrid Fiber Cable



GYXTW-8B1. 3+RV2C*1. 5mm²Bc

More Images






Product Description

/36/48/72/86/144/288 CorComposite Hybrid Optical Fiber Cable Photoelectric Composite Singlemode Multimode 2/4/6/12/24e

A series of problems with a small outer diameter, light weight and small space occupancy (usually solved with multiple cables, which can be replaced by a composite cable; Low customer procurement costs, low construction costs and network construction costs; Excellent bending performance and good side pressure resistance, Shigongfangbian; At the same time, it provides a variety of transmission technologies, which are highly adaptable, scalable, and widely applicable to the equipment; Provide large bandwidth access;-Cost savings and the use of optical fibre for household reservation, avoiding secondary wiring;Solve the problem of power supply for equipment in network construction(avoid duplication of distribution of power supply lines).

Applicable laying method:-The telecommunication power supply system;
Short distance communication system power supply;

Our Product Introduction

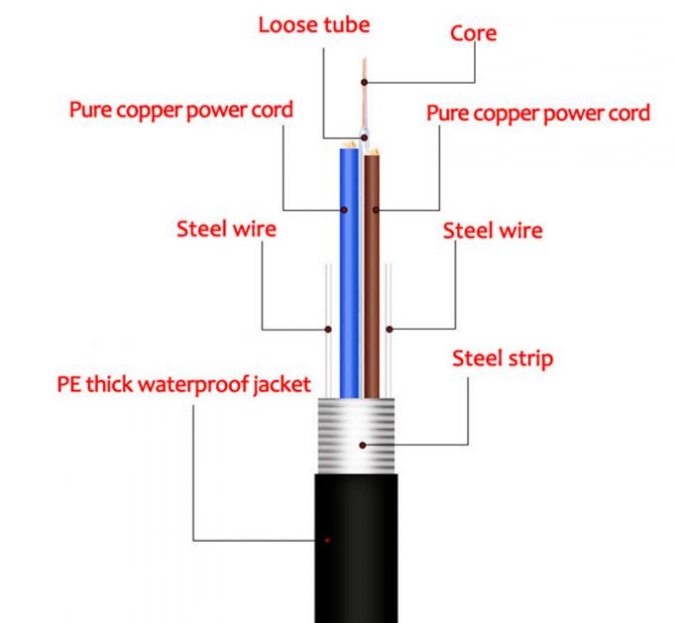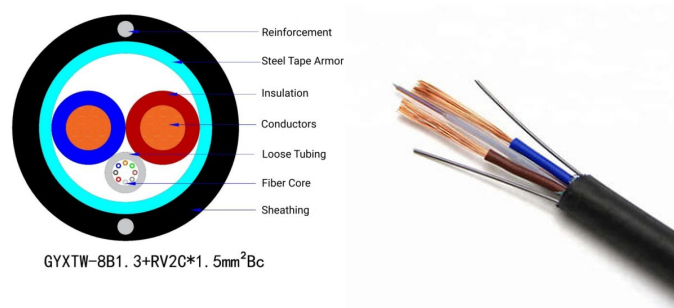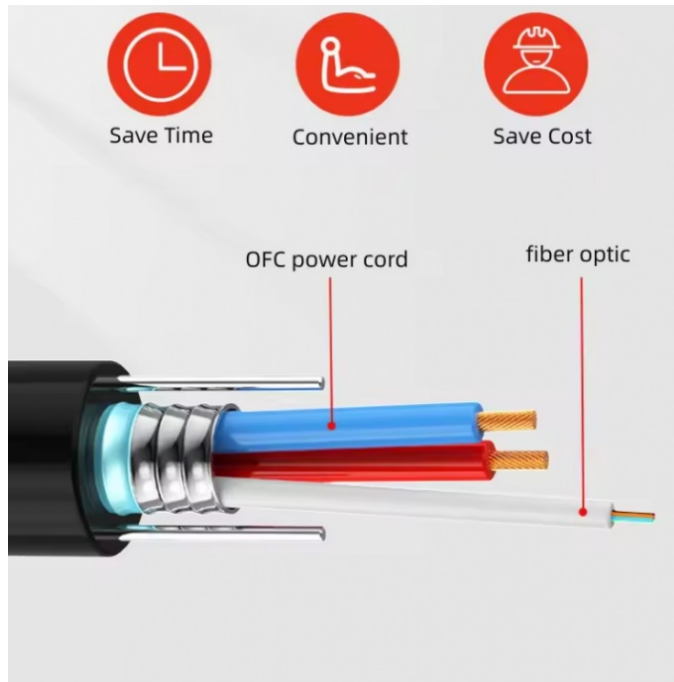


Product Parameters


| Item | RVV2*2.5MM | RVV-4*2.5mm | RVV-6*2.5mm | RVV-8*2.5mm |
|--------------------------------|------------|-------------|-------------|-------------|
| cooper weight | 347 | 382 | 502 | 628 |
| fiber count | 1 | 2-18 | 1 | 1 |
| structure | 1 | 20-24 | 1 | 1 |
| fibers per tube | 1 | 2-18 | 1 | 1 |
| loose tube diameter | 1.8±0.1 | 1.9±0.1 | 1 | 1 |
| CONDUCTOR CORSS SECTIONAL AREA | 1 | 1 | 1 | 1 |
| cable diameter | 9.4 | 10.4 | 10.4 | 10.4 |
| cable weight | 92 | 106 | 106 | 106 |

| | | | | | | |
|--|---|--------|---------|----------|---------------|-----|
| 2-18 | 1 | 2-18 | 1.8±0.1 | 1.5 | 10.8 | 119 |
| 20-24 | 1 | 20-24 | 1.8±0.1 | 1.5 | 11.3 | 127 |
| Item | | | | Unit | Specification | |
| Fier Tyoe | | | | G652D | G652D | |
| Mode filed Diameter | | 1310nm | μm | 9.2±0.4 | | |
| | | 1550nm | μm | 10.4±0.8 | | |
| Cladding diameter | | | | μm | 125.0±0.1 | |
| Cladding non-circularity | | | | % | ≤1.0 | |
| Core/cladding concentricity error | | | | μm | ≤0.5 | |
| Coating diameter | | | | μm | 245±7 | |
| Coating/cladding concentricity error | | | | μm | ≤12 | |
| Cable cut-off wavelength | | | | μm | ≤1260 | |
| Attenuation Coefficient | | 1310nm | db/km | ≤0.36 | | |
| | | 1550nm | db/km | ≤0.22 | | |
| Proof stress level | | | | kpsi | ≥100 | |
| Note: Other parameters meet standard ITU-T G.652 | | | | | | |

Production Supplier Profile

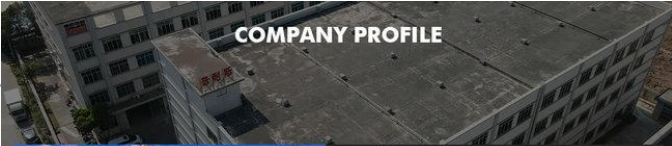

COMPANY PROFILE



ABOUT FIBER
Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained ISO 9000:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification.


Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 80 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



+8613687956390 cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM

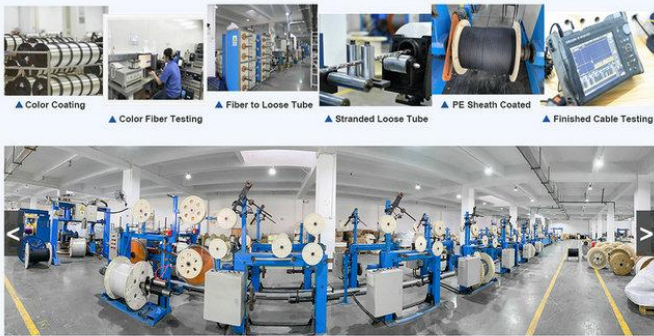

How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China