₫

more products please visit us on fiberoptical-cables.com

Photoelectric Hybrid Fiber Cable Singlemode Multimode 36 48 86 144 288 Core

Basic Information

Place of Origin: GUANGZHOU/CHINA

Brand Name: PUNAISGDCertification: ISO/CE/ROSH

Model Number: GYXTW 8b1.3 +RVV1.5mm

Minimum Order Quantity: 2kmPrice: negotiate

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

• Payment Terms: 30%TT as deposit,70%Balance before

shipping. 100km



Product Specification


• Supply Ability:

• ITEM NO.: GYTXW 8B1.3 +RVV1.5mm

Cooper Wire: 1.5 Mm²/2.5mm²
 Jacket Color: Black Or Customized

Jacket Material: PE/LSZH
 Armored Type: Steel Tape
 Strength Member: Steel Wires

Highlight: Photoelectric Hybrid Fiber Cable,
 288 Core Hybrid Fiber Cable,
 Multimode Hybrid Fiber Cable



More Images





Product Description


 $/36/48/72/86/144/288\ Cor Composite\ Hybrid\ Optical\ Fiber\ Cable\ Photoelectric\ Composite\ Singlemode\ Multimode\ 2/4/6/12/24e$

A series of problems with a small outer diameter, light weight and small space occupancy (usually solved with multiple cables, which can be replaced by a composite cable; Low customer procurement costs, low construction costs and network construction costs; Excellent bending performance and good side pressure resistance, Shigongfangbian; At the same time, it provides a variety of transmission technologies, which are highly adaptable, scalable, and widely applicable to the equipment; Provide large bandwidth access;-Cost savings and the use of optical fibre for household reservation, avoiding secondary wiring;Solve the problem of power supply for equipment in network construction(avoid duplication of distribution of power supply lines).

Applicable laying method:-The telecommunication power supply system; Short distance communication system power supply;

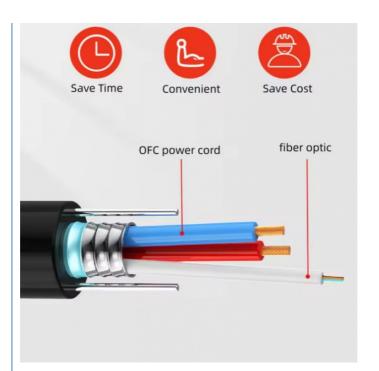

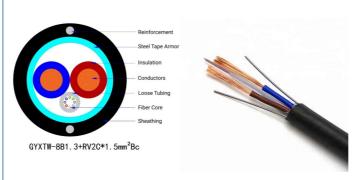

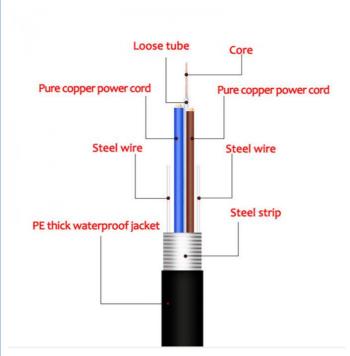

Product Paramenters

item							
cooper		RV	V2*2.5MM	RVV-4*2.5mm	RVV-6*2.5mm	RVV-8*2.5	mm
weight		347		382 502		628	
fiber count	stru		fibers per tube	loose tube diameter	CONDUCTOR CORSS SECTIONAL AREA	cable diameter	cable weight
2-18	1		2-18	1.8±0.1	1	9.4	92
20-24	1		20-24	1.9±0.1	1	10.4	106

2-18 1 2-18 1.8±0	.1	1.5	10.8 119					
20-24 1 20-24 1.8±0	.1	1.5	11.3 127					
Item		Unit	Specification					
Fier Tyoe		G652D	G652D					
Mode filed Diameter	1310nm	μm	9.2±0.4					
Wode filed Blaffieler	1550nm	μm	10.4±0.8					
Cladding diameter		μm	125.0±0.1					
Cladding non-circularity		%	≤1.0					
Core/cladding concentricity error		μm	≤0.5					
Coating diameter		μm	245±7					
Coating/cladding concentricity error	or	μm	≤12					
Cable cut-off wavelength		μm	≤1260					
Attenuation Coefficient	1310nm	db/km	≤0.36					
Attendation Coefficient	1550nm	db/km	≤0.22					
Proof stress level		kpsi	≥100					
Note: Other parameters meet standard ITU-T G.652								

Production Supplier Profile





OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





How do I place an OEM or customized order?

- Send your purchase intention to our email: cotton@fibercablepuls.com
 Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
 Sign the contract or Proforma Invoice.
 After receiving your deposit, we will start to arrange the production.
 2 weeks before the completion of production, we will notify you to start contacting shipping.



+8613687956390

cotton@fibercabl