Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

· Certification: ISO/CE/ROSH

Model Number: Anchoring Clamp PA2000

• Minimum Order Quantity: 1 piece • Price: negotiate Packaging Details: catron • Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

. Supply Ability: negotiate



Product Specification

· Applications: Hanging Cable · Quantity: 50pcs/Outer Box . Carton Size: 25.5kg/Outer Carton 26.5kg/Outer Carton . G.Weight:

· OEM: Available Carton · Package:

Highlight: Fiber Optic Cable Anchoring Clamp,

Anti Corrosion Anchoring Clamp,

Anchoring Clamp PA2000



More Images



Our Product Introduction

Anchoring Clamp PA2000 Fiber Optic Cable Accessorie Anti Corrosion

Product Attributes

Attribute	Value
Applications	Hanging cable
Quantity	50pcs/Outer box
Carton Size	25.5kg/Outer Carton
G.Weight	26.5kg/Outer Carton
OEM	available
Package	Carton

Product Description

ADSS OPGW OPPC Accessory Anchoring Clamp PA2000





The anchoring cable clamp is of high quality and durable. This product consists of two parts: a stainless steel wire and its main material, a reinforced nylon body that is lightweight and convenient to carry outdoors. The clamp's body material is UV plastic, which is friendly and safe and can be used in tropical environments.

The FTTH anchor clamp is designed to fit various ADSS cable designs and can hold cables with diameters of 11-15mm. It is used on deadend fiber optic cables. Installing the FTTH drop cable fitting is easy, but preparation of the optical cable is required before attaching it. The open hook self-locking construction makes installation on fiber poles easier. The anchor FTTX optical fiber clamp and drop wire cable brackets are available either separately or together as an assembly.

Product Features

Good anti-corrosion performance

Abrasion and wear resistant

Maintenance-free

Strong grip to prevent the cable from slipping

Body is cast of nylon body, it's lightly and convenient to carry outside

Stainless steel wire has guaranteed firm tensile force

Wedges are made of weather resistant material

The installation does not require any specific tools and the operating time is drastically reduced

Applications





Hanging cable

Propose a fitting covering installation situations on poles

Power and overhead line accessories


FTTH fiber optic aerial cable

Specifications

Mod	el	Cable Diameter (mm)	Break Load (kn)	Material
OYI-	PA2000	11-15	8	PA, Stainless Steel

Our Factory



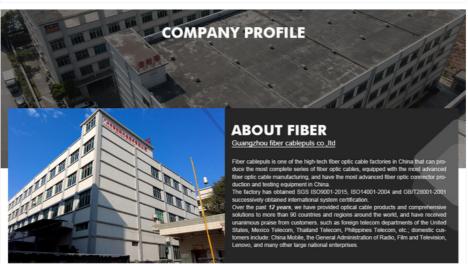













OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM













▲ Color Coating

▲ Color Fiber Testin

▲ Strand

oose Tube

▲ Finished Cable Testing







FAQ

1. Why choose us?

people in our factory.

2. How can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment.

3. Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design. We will offer you a reasonable price and make samples for you.

5. What services can we provide?

Accepted Delivery Terms: FOB, CIF, EXW;

Accepted Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF; Accepted Payment Type: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow;

Language Spoken: English, Chinese

guangzhou fiber cablepuls co ltd

+8613687956390

cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China