



ASU Fiber Optic Cable Aerial Self Supporting 150m 6 Core FRP HDPE

Basic Information

Place of Origin: GUANGZHOU/CHINABrand Name: PUNAISGD/CABLEPULS

• Certification: ISO/CE/ROSH

Model Number: ASUMinimum Order Quantity: 2kmPrice: negotiate

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

• Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



Product Specification

Type: ASU
Span: 150m
Core: 2-12
Core Numbers: 6 Cores
Central Strengthen Member: FRP

• Sheath Material: HDPE MDPE

• Highlight: All dielectric fiber optic cable,

Aerial fiber optic cable, 120m fiber optic cable



More Images




ASU Fiber Optic Cable Aerial Self Supporting Cable Span 120m All Dielectric Cable


Product Attributes

Attribute	Value
Туре	ASU
Span	150m
Core	2-12
Core Numbers	6 cores
Central Strengthen Member	FRP
Sheath Material	HDPE MDPE

Product Description

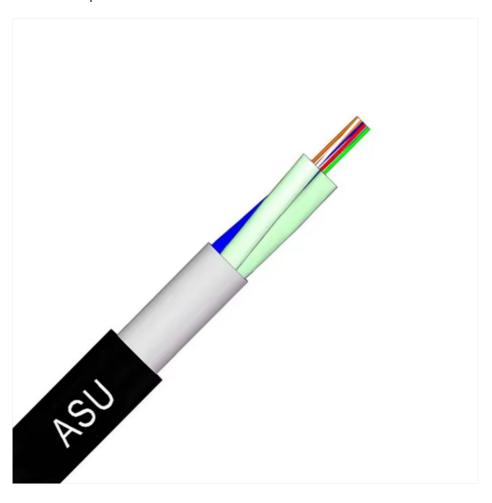

The ASU Cable is a Self-Supported Optical Cable designed for connecting devices, with available lengths of 80 or 120 meters suitable for both metropolitan and rural networks. It has an FRP strength member for better traction and reduced electrical discharge risks, and it can be easily installed without the need for guy wires or grounding.

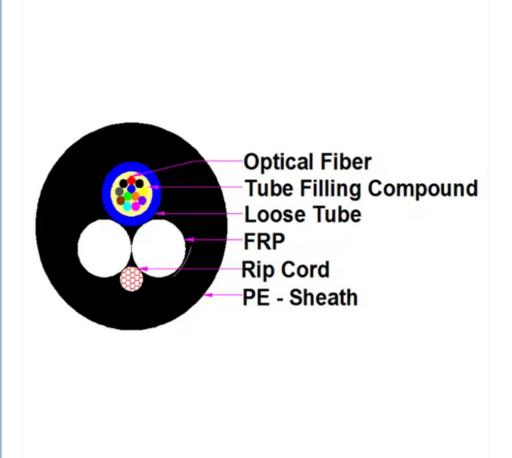



Cable Structure

PE Sheath Protection: The cable's PE sheath defends against environmental stress, which helps to extend its operational life.

 $\textbf{FRP Reinforcement:} \ \ \textbf{Features FRP reinforcement to provide strength without conductivity, enhancing safety.}$

Cable Deployment Cord: A cord is provided for quick and convenient cable deployment.

Fiber Insulation Gel: The gel used for insulation protects the fibers and simplifies the installation process.


Inner Tubing Flexibility: The inner tubing is designed to be flexible, facilitating fiber movement and additional protection. **Signal-Fiber Components:** The fibers responsible for transmitting signals are key to achieving high network efficiency.

Product Parameters

Item	Parameters
Loose tube	Material: PBT
Central Strength Member	Material: FRP
Outer jacket	Out Diameter: 6.8±0.2
	Material: HDPE -UV protection
	Color: Black

More About Our Factory



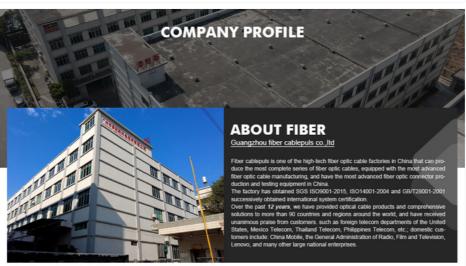



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





HOT-SALE PRODUCT





TRANSPORT&PAY









FAQ

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market (100.00%). There are total about 11-50

people in our factory.

2. How can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment.

3. Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design. We will offer you a reasonable price and make samples for you.

5. What services can we provide?

Accepted Delivery Terms: FOB, CIF, EXW; Accepted Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF; Accepted Payment Type: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow; Language Spoken: English, Chinese







cotton@fibercablepuls.com



e fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China