OTDR Tester with Optical Power Meter 1310nm/1550nm/1625nm

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification:

OTDR Model Number: • Minimum Order Quantity: 1 piece • Price: negotiate

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: negotiate



Product Specification

Model Number: **OTDR Tester** . Place Of Origin: Guangdong, China Network Type: Wireless Lan 1310nm/1550nm

Wavelength: Available · Oem: Material: Metal

• Highlight: 1310nm otdr, 1625nm otdr, 1550nm otdr



More Images



OTDR 1310nm/1550nm/1625nm With Optical Power Meter

Product Attributes

Model Number	OTDR Tester
Place of Origin	Guangdong, China
Network type	Wireless Lan
Wavelength	1310nm/1550nm
ОЕМ	Available
Material	Metal

Product Description

Factory price OTDR 1310nm/1550nm/1625nm with optical power meter





An optical power meter (OPM) is a device designed to measure the power of an optical signal. This term typically refers to instruments used for assessing average power in fiber optic systems. Other general light power measuring tools are commonly known as radiometers, photometers, laser power meters (which can include photodiode sensors or thermopile sensors), light meters, or lux meters.



Universal Interface: 2.5mm

Wavelength Range: 850 to 1625 nm

Calibration Method: Manual

Design: Compact mini case protection, stylish and practical

Accuracy: ±0.2 dB

Measurement Range: -70 to +6 dBm / -50 to +26 dBm Buttons: Waterproof, suitable for various outdoor conditions LED Indicators: Ideal for use in low-light environments

Applications

Maintenance in Telecom

Maintenance CATV

Fiber Optic Lab Testing


Other Fiber Optic Measurements

Product Specifications

Model	SL-NK3200
Output Power	-5dBm±0.5dB
Output Wavelength	1310/1550nm
Frequency Output	270/1k/2kHz
Wavelength Recognition	1310/1550nm
Test Range	-50~+26dBm
Resolution	0.01dB
Calibrated Wavelength	850/1300/1310/1490/1550/1625nm
Accuracy	±0.2dB
Memory Capacity	999 groups
Weight	180g
Dimension	145L×60W×45H(mm)
Communication Port	USB
Power Supply	2* Ni-MH AA battery
Optional	(PD)1.25mm adapter/2.5mm adapter

Our Factory



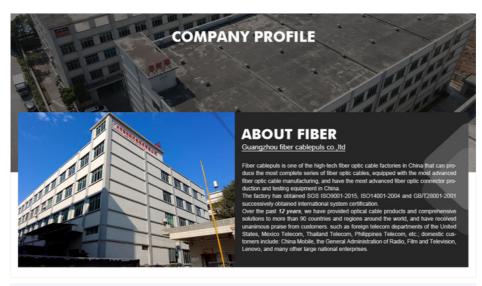














OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM







▲ Color Fiber Testing



▲ Fiber to Loose Tube



▲ Stranded Loose Tub



▲ Finished Cable Testing



TRANSPORT&PAY



















And More.....



















SHIPMENT

PACKAGING → TRUCK LOADING →

GOODS RECEIPT

HOT-SALE PRODUCT





Frequently Asked Questions

Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

How can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment;

Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design. We will offer you a reasonable price and make samples for you.

What services can we provide?

Accepted Delivery Terms: FOB, CIF, EXW;

Accepted Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF; Accepted Payment Type: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow;

Language Spoken: English, Chinese





cotton@fibercablepuls.com



e fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province, China