

ADSS Fiber Optic Cable 48 Core GYXTW GYTS GYTA GYFTY Black

Basic Information

. Place of Origin: **GUANGZHOU/CHINA**

. Brand Name: **PUNAISGD** ISO/CE/ROSH · Certification: ADSS-LSZH-48B1.3 Model Number:

• Minimum Order Quantity: 1km • Price: negotiate

Wooden Spool /drum Packaging Details:

• Delivery Time: 5-25 days

• Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



Product Specification

Model Number: ADSS-LSZH-48B1.3 Length: 2km/3km/4km 24/36/48/72/144 • Fiber Count: PE/DOUBLE JACKET Jacket:

· Colour: Black

Highlight: **GYTS ADSS Fiber Optic Cable**,

GYXTW ADSS Fiber Optic Cable, **GYTA ADSS Fiber Optic Cable**



More Images





ADSS Fiber Optic Cable GYXTW GYTS GYTA GYFTY

Product Specifications

Attribute	Value
Model Number	ADSS-LSZH-48B1.3
Length	2km/3km/4km
Fiber count	24/36/48/72/144
Jacket	PE/DOUBLE JACKET
Color	Black

Product Description

Our ADSS Fiber Optic Cable features 250µm fibers positioned in a high modulus plastic loose tube. The tubes are filled with water-resistant compound, with a Fiber Reinforced Plastic (FRP)/Steel wire central strength member. Tubes are stranded around this member to form a compact, circular core, protected by a PE sheath after water-blocking filling.

Standards & Compliance

Complies with Standard YD/T 901-2001 and IEC 60794-1.

Key Features

Excellent mechanical and temperature performance

High strength, hydrolysis-resistant loose tube

Special tube filling compound for critical fiber protection


Superior crush resistance and flexibility

Comprehensive water-blocking measures including 100% cable core filling

PSP/PAP enhanced moisture protection


Steel wire central strength member

Cable Structure

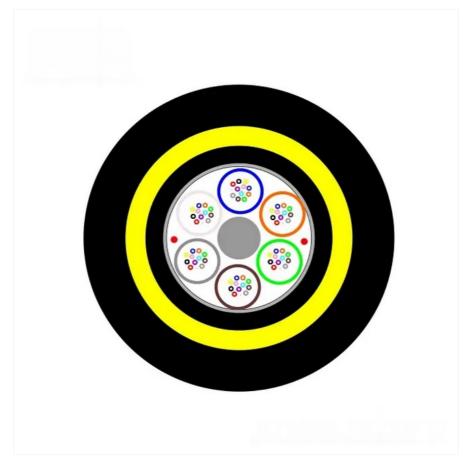





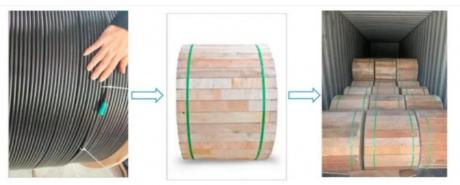

Technical Specifications

Item	Fibre Count	6	12	24	48	72	96	144	288	
Loose Tube	Tubes*	1x6	2x6	4x6	6x8	4x12	6x12	8x12	12x12	24x12
Outer diameter (mm)		1.8	2.0	2.5	2.5	2.5	2.5			

Fiber Parameters

No.	Items	Unit	Specification
1	Mode Field Diameter	1310nm	μm 9.2±0.4
		1550nm	μm 10.4±0.8
2	Cladding Diameter	μm	125.0±1.0

Production & Transportation




01 Standard production Line,strict SOP production procedure

02 Attenunation test for each fiber by OTDR after production,and QC for every detail



Our Manufacturing Facility



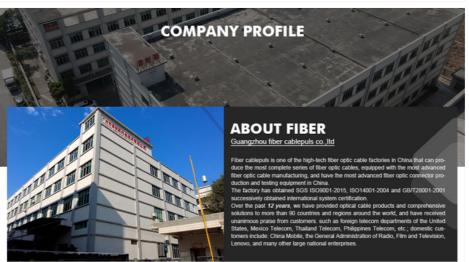



Frequently Asked Questions

Why choose us?

We are a manufacturer located in Guangzhou, China, operating since 2011 with 11-50 employees, specializing in domestic market distribution.

How do we guarantee quality?

We conduct pre-production samples before mass production and final inspections before shipment.

Can you ship to my country?

Yes, we can arrange shipping even if you don't have your own forwarder.

Do you offer OEM services?

We accept all OEM orders - contact us with your design for samples and competitive pricing.

What services do we provide?

Delivery Terms: FOB, CIF, EXW | Payment: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF | Payment Methods: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow | Languages: English, Chinese





+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com