



Direct Burial Fiber Cable SM G652D Outdoor Fiber Optic Cable GYFTA53

Our Product Introduction

for more products please visit us on fiberoptical-cables.com

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYFTA53-36b1.3
- Minimum Order Quantity: 2km
- Price: negotiable
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- Item No.: GYFTA53-36b1.3
- Fiber Type: Single Mode /Multi Mode
- Armored Type: Double Armored
- Application: Underground
- Fiber Count: 36 Cores
- Armored: Yes
- FACTORY: DIRECTLY FACTORY
- Highlight: GYFTA53 Fiber Cable,
Outdoor Fiber Optic Cable,
SM G652D Fiber Cable





Product Description

SM G652D outdoor Fiber Optic Cable GYFTA53


Outdoor Optical Cable GYFTA53 12 Cores advantages

Excellent mechanical properties and temperature characteristics
The loose tube material itself has good hydrolysis resistance and high strength
The tube is filled with special grease to provide critical protection for the optical fiber
Good pressure resistance and softness
Good tensile strength and temperature characteristics:
The controlled excess fiber length design ensures that the optical cable has excellent tensile strength and the ability to adapt to different temperature conditions.
Excellent waterproof performance:
The full-section water-blocking structure and the loose tube filled with waterproof compounds ensure the dryness inside the optical cable and effectively prevent moisture penetration.

Our Product Introduction

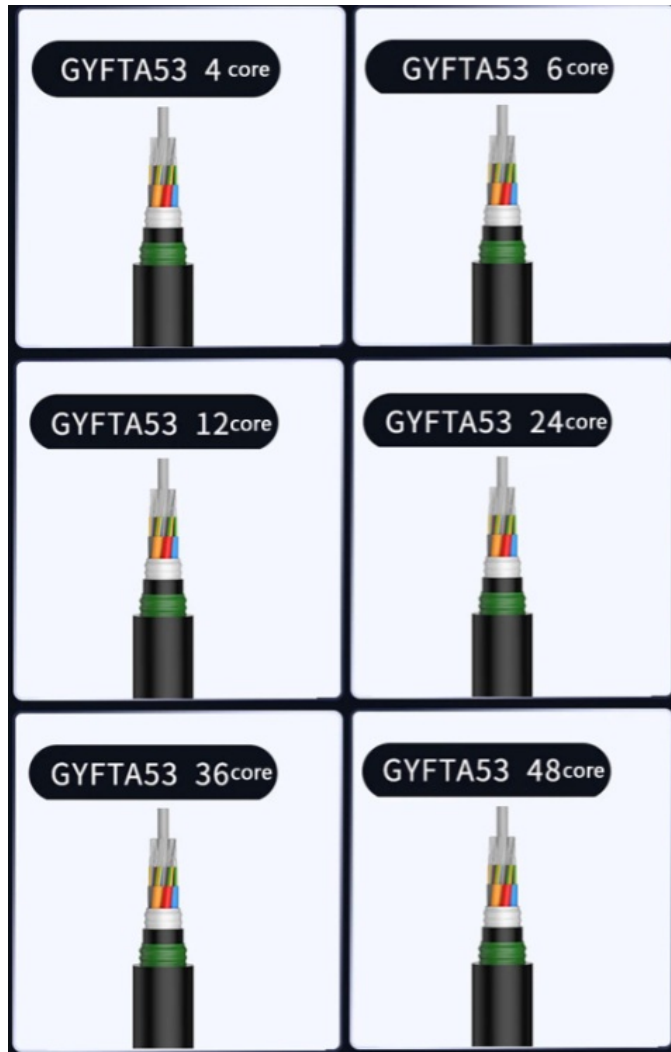

GYTA53 Cable Place Order Information

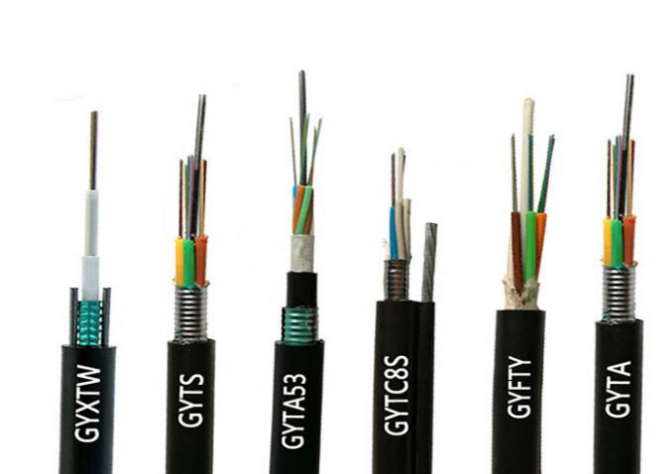

CABLE DATA

fiber count	fibers per tube	loose tube diameter	CSM diameter	nominal tickness of outer jacket	cable diameter	cable weight
4	4	1.8±0.1	1.4/1.4	1.6	11.5±0.2	140

6	6	1.9±0.1	1.4/1.4	1.6	11.5 ±0.2	140
8	8	1.9±0.1	1.4/1.4	1.6	11.5 ±0.2	140
12	6	1.9±0.1	1.4/1.4	1.6	11.5 ±0.2	140
24	6	1.9±0.1	1.4/1.4	1.6	11.5±0.2	140
36	12	1.9±0.1	1.6/1.6	1.6	11.5±0.2	140
48	12	2.2±0.1	1.6/1.6	1.6	12.2±0.2	140
72	12	2.2±0.1	1.6/3.5	1.6	12.2±0.2	150
96	12	2.2±0.1	2.0/2.0	1.6	12.2±0.2	160
144	12	2.2±0.1	2.0/6.4	1.8	13.8±0.2	180


Fiber Parameters

No.	Items		Unit	Specification
				G.652D
1	Mode Field Diameter	1310nm	μm	9.2±0.4
		1550nm	μm	10.4±0.8
2	Cladding Diameter		μm	125.0±1.0
3	Cladding Non-Circularity		%	≤1.0
4	Core-Cladding Concentricity Error		μm	≤0.5
5	Coating Diameter		μm	245±5
6	Coating Non-Circularity		%	≤6.0
7	Cladding-Coating Concentricity Error		μm	≤12.0
8	Cable Cutoff Wavelength		nm	λ _c ≤1260
9	Attenuation(max.)	1310nm	dB/km	≤0.35
		1550nm	dB/km	≤0.21
		1380nm	dB/km	≤0.35
		1625nm	dB/km	≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm	dB/km	≤0.04
		1550nm 1525-1575nm	dB/km	≤0.03
		1550nm 1480-1580nm	dB/km	≤0.05
11	Dispersion	1288-1339nm	ps/(nm.km)	≥-3.5, ≤3.5
		1271-1360nm	ps/(nm.km)	≥-5.3, ≤5.3
		1480-1580nm	ps/(nm.km)	≤20
		1550nm	ps/(nm.km)	≤18
12	Zero dispersion wavelength		Nm	1300-1324
13	Zero dispersion slope		ps/(nm ² •km)	≤0.092
14	Typical value		ps/(nm ² •km)	0.04
15	Largest individual fiber		Ps/√ km	0.2
16	Link design values		Ps/√ km	0.1
17	Two way average		1310nm-1550	≤0.01dB

Cable Marking&Fibers Colors

COMPANY Fiber cable name N*cores G.652D 2024 XXXXm
 *The marking is printed every 1 meter;
 ***"G.652D" means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber..

Also can according to client cable marking.

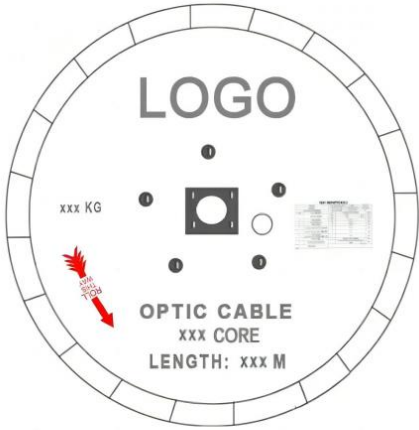

Production Supplier Profile

COMPANY PROFILE



ABOUT FIBER

[Guangzhou fiber cablepuls co.,ltd](mailto:cotton@fibercablepuls.com)

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successfully obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International Guangzhou city, Guangdong province, China