## **Basic Information**

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification:

ADSS-24B1.3-LSZH-100M Model Number:

• Minimum Order Quantity: 2km • Price: negotiate

· Packaging Details: Wooden Spool Φ1200\*750mm

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

. Supply Ability: 100km



# **Product Specification**

• Item No.: ADSS-24B1.3-LSZH-100M

Fiber Count: 24 CORES

• Fiber Type: Single-mode/G625D • Strength Member Material: FRP/ARMID YARN

· Jacket Color: Black • Outer /Inner Sheath LSZH Material:

Installation Method: Aerial · Warranty Period: 25 Years

Highlight: Aerial ADSS Fiber Optic Cable,

48 Core ADSS Fiber Optic Cable, 24 Core ADSS Fiber Optic Cable



Our Product Introduction

## **Product Description**

## ADSS Fiber Optic Cable 24Core 48Core ADSS Single-Mode Double-LSZH-Jacket For Aerial

ADSS cable is a type of <u>fiber optic cable</u> that is strong enough to support itself between structures without containing conductive metal elements.

Both single mode and multimode fibers can be arranged in ADSS cables with a maximum of 144 fibers. ADSS fiber optic cable is designed for outside plant aerial and duct applications in local and campus network loop architectures from pole-to-building to town-to-town installations. The cabling system that includes cables, suspension, dead-end,

and termination enclosures offers a comprehensive transmission circuit infrastructure with high-reliability performance.






## **ADSS Cable Place Order Information**

Cable structure									
No. of fiber	8 cores	16core s	24core s	32core s	48core s	64core s	96core s	128cores	144c ores
No. of fiber/tube	2cores	4cores	4cores	8cores	8cores	8cores	8cores	12+8core s	12co res
No. of Tube	4	4	6	4	6	8	12	10+1	12
Inner Diameter(mm)	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7± 0.1
Diámetroext erior(mm)	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5± 0.1
Filler	2	2	-	2	-	-	-	-	-
CentralStrength Member(FRP) mm	2.6	2.6	2.6	2.6	2.6	3.5	2.6/7.2	2.6/7.2	2.6/7 .2
Tear rope (inner sheath)	2	2	2	2	2	2	2	2	2
Thickness of PE inner sheath	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
Outer diameter of PE inner sheath	10.0	10.0	10.0	10.0	10.0	10.9	14.6	14.6	14.6
Reinforcing layer aramid	Domest ic aramid fiber	-	-	-	-	-	-	-	_
Tear rope (outer sheath)	2	2	2	2	2	2	2	2	2
PE outer protection thickness	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Outer diameter of PE outer sheath	13.3±0. 5	13.3±0. 5	13.3±0. 5	13.3±0. 5	13.3±0. 5	14.2±0. 5	17.9±0. 5	18.0±0.5	18.1 ±0.5

# Single Sheath ADSS Cable:

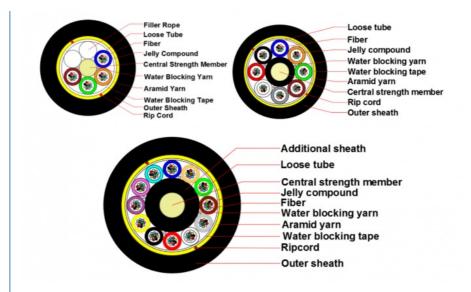

#### Construction:

This type features a single outer jacket layer. Lightweight: It's typically lighter than double sheath variants.

#### Applications:

Ideal for environments with lower risk of mechanical damage or where cable weight is a critical factor.


#### Cost-Efficient:

Generally more cost-effective due to less material usage.

#### Environmental Resistance:

Offers sufficient protection against UV rays, moisture, and minor abrasions.

#### **Double Sheath ADSS Cable:**

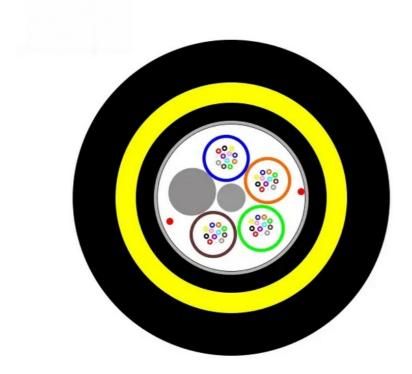

# ADSS-D-48F

#### Construction:

Equipped with two layers of sheathing, an inner and an outer jacket.

#### Enhanced Protection:

Provides better mechanical protection, making it suitable for harsher environments.

#### Durability

More resistant to abrasion, rodents, and other forms of physical damage.

Weight and Cost:

Heavier and typically more expensive than single sheath cables due to additional materials.


# Applications:

Preferred in areas with higher potential for mechanical stress, such as regions with dense vegetation or frequent severe weather.

# **Optical Fiber Hardware for ADSS cables**



# Production Supplier Profile

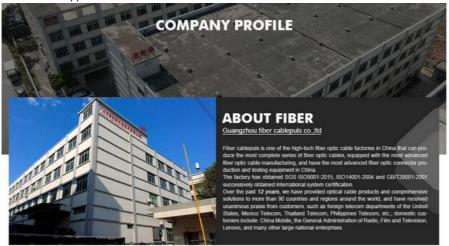



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.





cotton@fibercablepuls.com



@ fiberoptical-cables.com