Aerial Figure 8 Fiber Optic Cable GYFTC8Y 24 Core Dielectric Fiber Optic Cable Black Color

Basic Information

Place of Origin: GUANGZHOU/CHINA
 Brand Name: PUNAISGD/CABLEPULS
 Certification: ISO/CE/ROSH
 Model Number: GYFTC8Y-12B1.3

Minimum Order Quantity: 2km Price: negotiate

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

• Payment Terms: 30%TT as deposit,70%Balance before

Supply Ability: shipping.100km



Product Specification

• ITEM NO.: GYFTC8Y-12B1.3

Jacket Color: Black
Jacket Material: PE/LSZH
Fiber Type: G.652D
Armored Type: NONE
Application: Outdoor AREIAL

Water Blocking: Water Swellable TapeTYPE: Fig.8 Shape

Highlight: 24 Core Dielectric Fiber Optic Cable,
 Aerial Figure 8 Fiber Optic Cable




More Images



Product Description

Aerial Figure 8 Fiber Optic Cable GYFTC8Y 24 Core Dielectric Fiber Optic Cable Specification Application:

The cable is applicable for long-distance and interoffice communication .

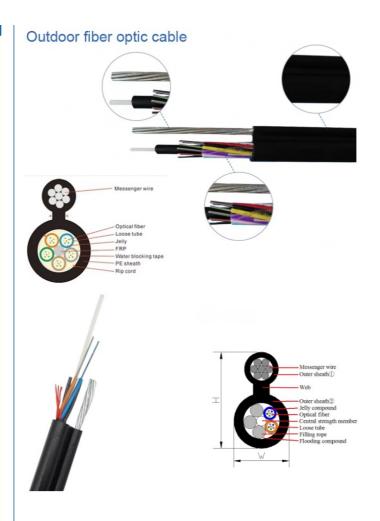




	CAL	SLE	DA	ıΙΑ
Ì	No.	of c	abl	е

CABLE DATA					
No. of cable		12	24		
Fiber Model		G652D	'		
Design (StrengthMember+Tu	ube&Filler)	1+5			
Central Strength	Material	FRP			
Member	Diameter(±0.05)mm	1.5			
	Material	PBT			
Loose Tube	Diameter(±0.06)mm	1.7			
Loose rube	Thickness(±0.03)mm	0.32			
	The Max.Core NO./Tube	6			
	Material	PP			
Filler Rope	Diameter(±0.06)mm	1.7			
	NO.	3	1		
Water Blocking Layer	r(Material)	Flooding Compound			
Outer Sheath	Material	PE			
Outer Sheath	Thickness(±0.1)mm	1.2			
Outer Sheath	Material	PE			
	Thickness(±0.1)mm	1.8			
Web	Material	PE			
MAGD	Size(±0.1)mm	2.0*2.0			
Managan ar Wira	Material	Steel stranded			
Messenger Wire	Size(±0.1)mm	2.7mm(0.9mm×7)			
Cable Diameter(±0.5	mm(W×H)	8.5x15.2			
Cable Weight(±10)kg	/km	100			
	Without Tension	10.0×Cable	9-φ		
Min. bending radius	Under Maximum Tension	20.0×Cable	9-φ		
ĺ					

Temperature range	Installation	-20~+60
()	Transport&Storage	-40~+70
()	Operation	-40~+70

Cable Marking&Fibers Colors

Also can according to client cable marking.

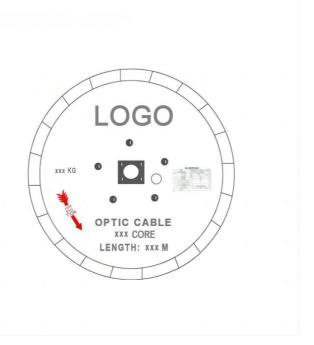

Production Supplier Profile





+8613687956390





COMPANY Fiber cable name N*cores G.652D 2024 XXXXm
*The marking is printed every 1 meter;
**"G.652D" means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber..



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





- How do I place an OEM or customized order?

 1) Send your purchase intention to our email: cotton@fibercablepuls.com

 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.

 3) Sign the contract or Proforma Invoice.

 4) After receiving your deposit, we will start to arrange the production.

 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China