



guangzhou fiber cablepuls co ltd
fiberoptical-cables.com



Aerial Figure 8 Fiber Optic Cable GYFTC8Y 24 Core Dielectric Fiber Optic Cable Black Color

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYFTC8Y-12B1.3
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- ITEM NO.: GYFTC8Y-12B1.3
- Jacket Color: Black
- Jacket Material: PE/LSZH
- Fiber Type: G.652D
- Armored Type: NONE
- Application: Outdoor AREIAL
- Water Blocking: Water Swellable Tape
- TYPE: Fig.8 Shape
- Highlight: 24 Core Dielectric Fiber Optic Cable, Aerial Figure 8 Fiber Optic Cable



More Images



Product Description



Aerial Figure 8 Fiber Optic Cable GYFTC8Y 24 Core Dielectric Fiber Optic Cable Specification

Application:

The cable is applicable for long-distance and interoffice communication .

Our Product Introduction

Outdoor fiber optic cable

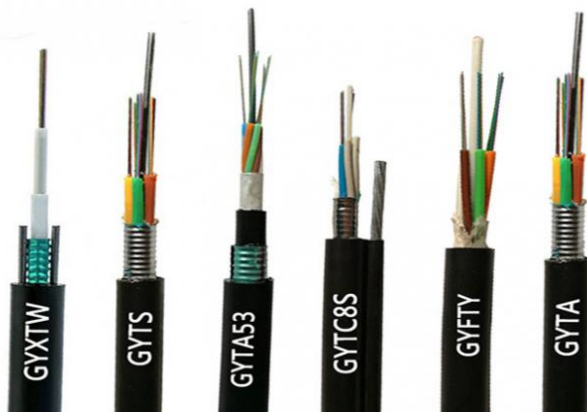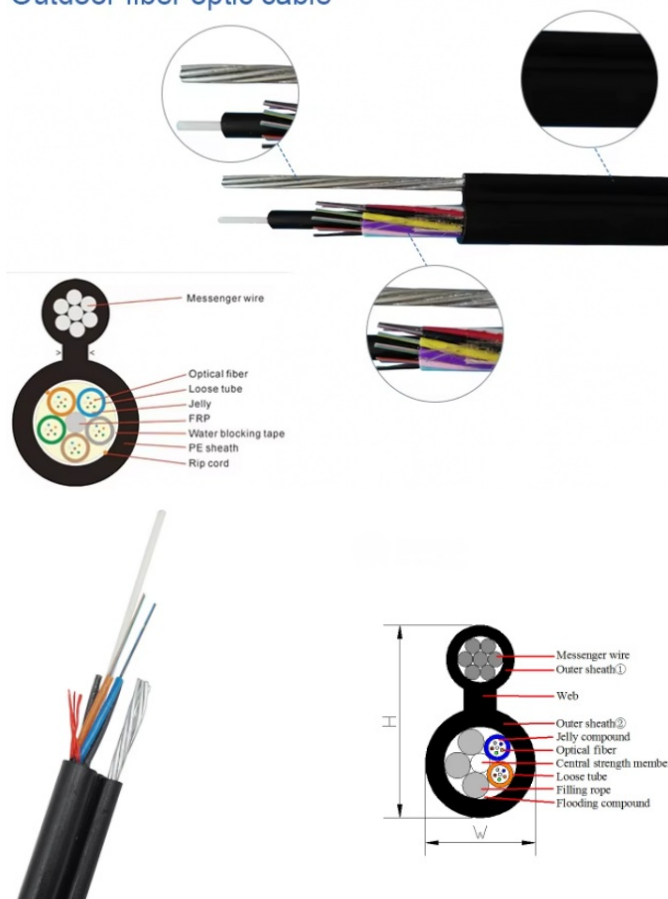

CABLE DATA


No. of cable	12	24
Fiber Model	G652D	
Design (Strength Member+ Tube&Filler)	1+5	
Central Strength Member	Material	FRP
	Diameter(±0.05)mm	1.5
Loose Tube	Material	PBT
	Diameter(±0.06)mm	1.7
	Thickness(±0.03)mm	0.32
	The Max.Core NO./Tube	6
Filler Rope	Material	PP
	Diameter(±0.06)mm	1.7
	NO.	3
Water Blocking Layer(Material)	Flooding Compound	
Outer Sheath①	Material	PE
	Thickness(±0.1)mm	1.2
Outer Sheath②	Material	PE
	Thickness(±0.1)mm	1.8
Web	Material	PE
	Size(±0.1)mm	2.0*2.0
Messenger Wire	Material	Steel stranded
	Size(±0.1)mm	2.7mm(0.9mm×7)
Cable Diameter(±0.5)mm(W×H)	8.5×15.2	
Cable Weight(±10)kg/km	100	
Min. bending radius	Without Tension	10.0×Cable-φ
	Under Maximum Tension	20.0×Cable-φ

Temperature range (°C)	Installation	-20~+60
	Transport&Storage	-40~+70
	Operation	-40~+70


Cable Marking&Fibers Colors

COMPANY Fiber cable name N*cores G.652D 2024 XXXXm
*The marking is printed every 1 meter;
***G.652D" means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber..

Also can according to client cable marking.

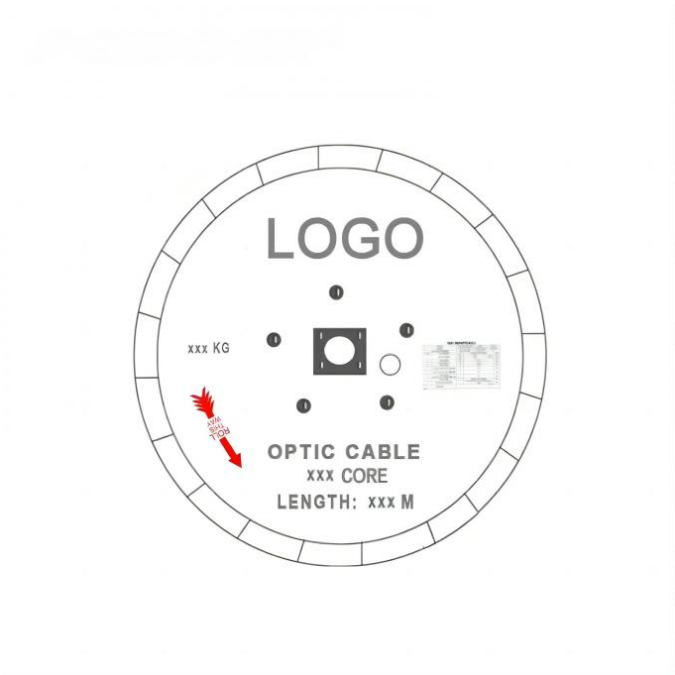

Production Supplier Profile

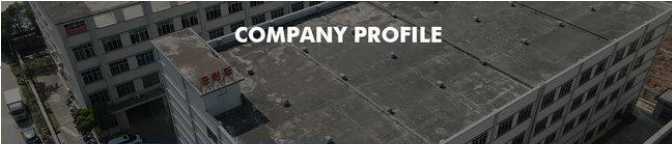


COMPANY PROFILE





ABOUT FIBER
Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China. The factory has obtained ISO 90001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification. Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 50 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



**guangzhou
fiber
cablepuls
co ltd**



+8613687956390 cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China