





ADSS Fiber Optic Cable 5km 2km 1 2 4 12 24 48 Core Gyta Gyxtw Adss Opgw Ftth Drop Communication Cable

Basic Information

Place of Origin: GUANGZHOU/CHINABrand Name: PUNAISGD/CABLEPULS

• Certification: ISO/CE/ROSH

Model Number: ADSS-LSZH-96B1.3-100M

Minimum Order Quantity: 2kmPrice: negotiate

Packaging Details: Wooden Spool Φ1200*750mm

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

• Supply Ability: 100km



Product Specification

• Item No.: ADSS-LSZH-96B1.3

• Fiber Count: 96 CORES

Fiber Type: Single-mode/G625DStrength Member Material: FRP/ARMID YARN

Jacket Color: Black Outer /Inner Sheath Material: Lszh

Installation Method: AerialWarranty Period: 25 Years

Highlight: 24 Core ADSS Fiber Optic Cable,

12 Core ADSS Fiber Optic Cable, 48 Core ADSS Fiber Optic Cable



More Images





Our Product Introduction

Product Description

ADSS Fiber Optic Cable 5km 2km 1 2 4 12 24 48 Core Gyta Gyxtw Adss Opgw Ftth Drop Communication Cable

ADSS cable is made of non-metallic material and self-supporting with the aerial power transmission line.

The tension resistance material is aramid yarn with high elasticity modules.

Because of this material, ADSS can withstand the large tension of installation (Max. span: 1500m),

ice(Max.ice thickness: ≥20mm) and weed pressure(Max. wind speed: 35m/s).

ADSS cable is loose tube stranded. Fibers are positioned into a loose tube made of high modulus plastics. The tubes are filled with a waterresistant filling compound. The tubes (and fillers) are stranded around FRP (Fibre Reinforced Plastic), as a non-metallic central strength member into a compact and circular cable core. After the cable core is filled with filling compound, it is covered with a thin polyethylene (PE) inner sheath. After two layers of Aramid yarns are applied in two directions over the inner sheath as strength member, the cable is completed with PE or AT (anti-tracking) outer sheath.




ADSS Cable Place Order Information

Cable structure									
No. of fiber	8 cores	16cores	24cores	32cores	48cores	64cores	96cores	128cores	144cores
No. of fiber/tube	2cores	4cores	4cores	8cores	8cores	8cores	8cores	12+8cores	12cores
No. of Tube	4	4	6	4	6	8	12	10+1	12
Inner Diameter(mm)	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1
Diámetroext erior(mm)	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1
Filler	2	2	-	2	-	-	-	-	-
CentralStrength Member(FRP) mm	2.6	2.6	2.6	2.6	2.6	3.5	2.6/7.2	2.6/7.2	2.6/7.2
Tear rope (inner sheath)	2	2	2	2	2	2	2	2	2
Thickness of PE inner sheath	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
Outer diameter of PE inner sheath	10.0	10.0	10.0	10.0	10.0	10.9	14.6	14.6	14.6
Reinforcing layer aramid	Domestic aramid fiber	-	-	-	-	-	-	-	-

Tear rope (outer sheath)	2	2	2	2	2	2	2	2	2
PE outer protection thickness	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Outer diameter of PE outer sheath	13.3±0.5	13.3±0.5	13.3±0.5	13.3±0.5	13.3±0.5	14.2±0.5	17.9±0.5	18.0±0.5	18.1±0.5

Single Sheath ADSS Cable:

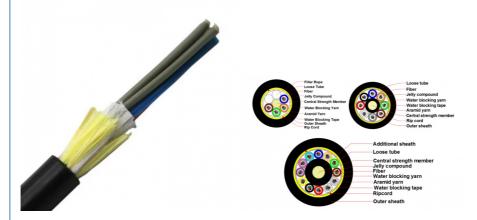

Construction:

This type features a single outer jacket layer. Lightweight: It's typically lighter than double sheath variants.

Applications

Ideal for environments with lower risk of mechanical damage or where cable weight is a critical factor.


Cost-Efficient:

Generally more cost-effective due to less material usage.

Environmental Resistance:

Offers sufficient protection against UV rays, moisture, and minor abrasions.

Double Sheath ADSS Cable:

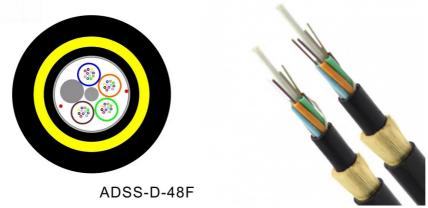

Construction:

Equipped with two layers of sheathing, an inner and an outer jacket.

Enhanced Protection:

Provides better mechanical protection, making it suitable for harsher environments.

Durability:

More resistant to abrasion, rodents, and other forms of physical damage.


Weight and Cost:

Heavier and typically more expensive than single sheath cables due to additional materials.

Applications:


Preferred in areas with higher potential for mechanical stress, such as regions with dense vegetation or frequent severe weather.

Optical Fiber Hardware for ADSS cables

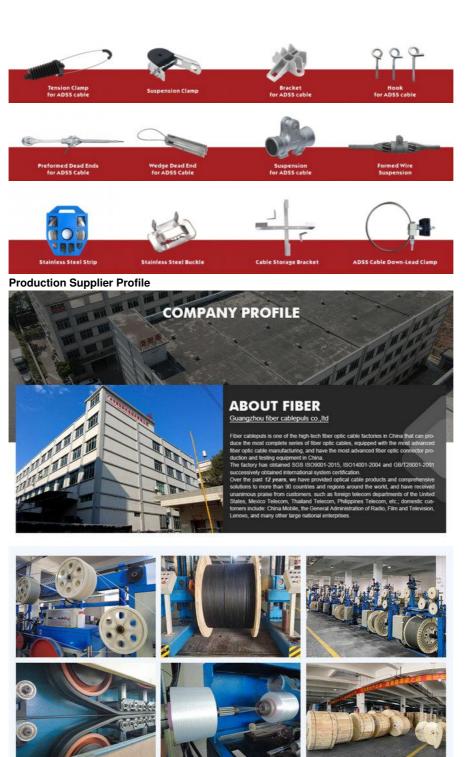



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM

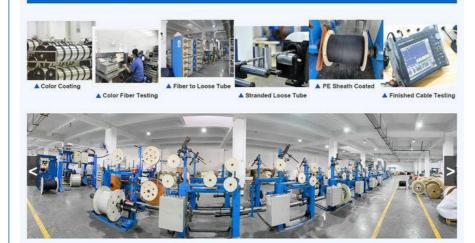

How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

guangzhou fiber cablepuls co ltd

+8613687956390

cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China