



12 Fiber Cable OM3 Outside Plant Non-Armored 250µm

Our Product Introduction

for more products please visit us on fiberoptical-cables.com

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYFTY-48B1.3
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- Item No.: GYFTY-48B1.3
- Fiber Count: 24/48/96/144/288
- Jacket Material: PE/LSZH
- Fiber Type: G.652D
- Jacket Color: Black
- Storage Temperature: -40 To +70
- Warranty Period: 25 Years
- Crush Resistance: Long Term: 300N/100mm, Short Term: 1000N/100mm
- Tensile Strength: Long Term: 600N, Short Term: 1500N
- Cable Color: Black
- Cable Diameter: 12.5 Mm
- Armored Type: NONE
- Application: Outdoor Duct Installation
- Highlight: **OM3 12 Fiber Cable, 250µm 12 Fiber Cable,**




Product Description


12 Fiber Cable, OM3, Outside Plant Non-Armored, 250µm

Our Product Introduction

Outdoor GYFTY Fiber

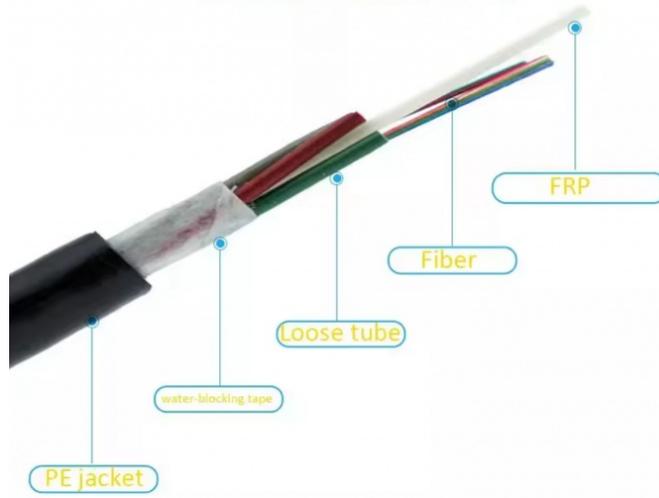

In the GYFTY cable, single-mode/multimode fibres are positioned in the loose tubes, which are made of high modulus plastic materials, while the loose tubes strand together around non-metallic central strength member (FRP) into a compact and circular cable core. For certain high fibre count cables, the strength member would be covered with polyethylene (PE). The water-blocking materials are distributed into the interstices of the cable core. Then the cable is completed with a PE sheath.



TECHNICAL DATA SHEET


Note	See Specification Sheet for technical details			
Product Type	Bulk Fiber Optic Cable			
Region	China			
Environment	Outside Plant			
Armor or Non-Armor	Non-Armored			
Fiber Type	OM3			
Number of Fibers	12			
Buffered, Loose Tube or Ribbon	250um Loose Tube			
Flammability Rating	Not Rated			
Cable Color	Black			
Sub Brand	Cablepuls®			

Part code	GYFTY				
Number of Fibers	Unit	8/12/24/36/48	72	96	144
Number of fiber in tube	Nos	8/6/6/12/12	12	12	12
Number of loose tube	Nos	1/2/4/3/4	6	8	12
Number of dummy filler	Nos	4/3/1/2/1	0	0	0
Central strength member	Material	FRP	FRP	FRP	FRP+ PE Coated
Loose tube	Material	PBT			
Additional strength	Material	Fiberglass yarn			
Outer sheath	Material	PE	PE	PE	PE
Cable nominal Diameter	MM ±0.2	9.5	10.0	11	12.4
Cable nominal weight	Kg/Km ±5	80	89	95	108
Max. working tension	N	2100	2400	2600	3000
Max. crush resistance	N	2000 (Short term) / 1000 (Long term)			
Min. bending radius	At full load 20 x Cable OD (including poles) At no load 15 x Cable OD				
Temperature range	Installation -0 -> +50 Operation -10 -> +7				

Cable Marking&Fibers Colors

COMPANY Fiber cable name N*cores G.652D 2024 XXXXm
 *The marking is printed every 1 meter;
 ***G.652D" means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber..

Also can according to client cable marking.

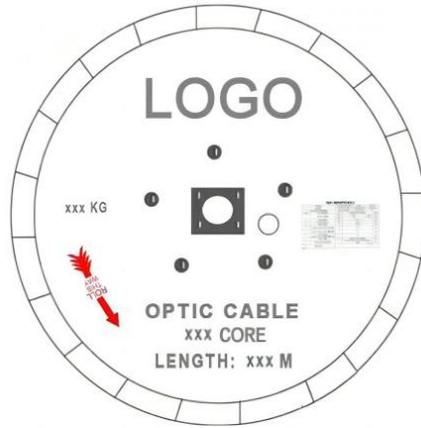

Production Supplier Profile



COMPANY PROFILE



ABOUT FIBER
Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 50 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



+8613687956390 cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) **2 weeks before the completion of production, we will notify you to start contacting shipping.**

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China