




## Black Jacket ADSS Fiber Optic Cable With Aerial Installation Method

### Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ADSS-LSZH-24B1.3-100M
- Minimum Order Quantity: 2km
- Price: 190
- Packaging Details: Wooden Spool  $\Phi 1200 \times 750$ mm
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit, 70%Balance before shipping.
- Supply Ability: 100km

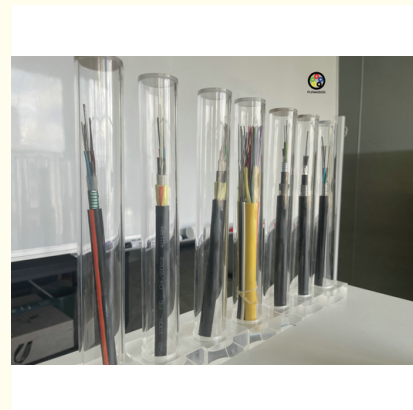

### Product Specification

- Item No.: ADSS-LSZH-24B1.3
- Fiber Count: 96 CORES
- Fiber Type: Single-mode/G625D
- Strength Member Material: FRP/ARMID YARN
- Jacket Color: Black
- Outer /Inner Sheath Material: Lszh
- Installation Method: Aerial
- Warranty Period: 25 Years
- Highlight: **Aerial ADSS Fiber Optic Cable, Black Jacket ADSS Fiber Optic Cable**



### More Images



## Product Description

### ADSS Fiber Optic Cable 5km 2km 1 2 4 12 24 48 Core Gyta Gyxtw Adss Opgw FttH Drop Communication Cable

The fiber optic cable adss fiberhome, offers resistance and quality in aerial installations between poles.

The adss cables resist the necessary traction thanks to central force member (CSM):

fiberglass reinforced plastic rod (GFRP), with PE cover covering when necessary.

Aramid yarn for additional strength. Fiber amount: 12-288

span option (y): 80- 1200

type of optical fiber g.652d

fiber model: single-mode

reels: 3-4-5km




### ADSS Cable Place Order Information

| Cable structure                   |                        |          |          |          |          |          |          |            |           |
|-----------------------------------|------------------------|----------|----------|----------|----------|----------|----------|------------|-----------|
| No. of fiber                      | 8 cores                | 16 cores | 24 cores | 32 cores | 48 cores | 64 cores | 96 cores | 128 cores  | 144 cores |
| No. of fiber/tube                 | 2 cores                | 4 cores  | 4 cores  | 8 cores  | 8 cores  | 8 cores  | 8 cores  | 12+8 cores | 12 cores  |
| No. of Tube                       | 4                      | 4        | 6        | 4        | 6        | 8        | 12       | 10+1       | 12        |
| Inner Diameter(mm)                | 1.7±0.1                | 1.7±0.1  | 1.7±0.1  | 1.7±0.1  | 1.7±0.1  | 1.7±0.1  | 1.7±0.1  | 1.7±0.1    | 1.7±0.1   |
| Diámetro exterior(mm)             | 2.5±0.1                | 2.5±0.1  | 2.5±0.1  | 2.5±0.1  | 2.5±0.1  | 2.5±0.1  | 2.5±0.1  | 2.5±0.1    | 2.5±0.1   |
| Filler                            | 2                      | 2        | -        | 2        | -        | -        | -        | -          | -         |
| Central Strength Member(FRP) mm   | 2.6                    | 2.6      | 2.6      | 2.6      | 2.6      | 3.5      | 2.6/7.2  | 2.6/7.2    | 2.6/7.2   |
| Tear rope (inner sheath)          | 2                      | 2        | 2        | 2        | 2        | 2        | 2        | 2          | 2         |
| Thickness of PE inner sheath      | 1.2                    | 1.2      | 1.2      | 1.2      | 1.2      | 1.2      | 1.2      | 1.2        | 1.2       |
| Outer diameter of PE inner sheath | 10.0                   | 10.0     | 10.0     | 10.0     | 10.0     | 10.9     | 14.6     | 14.6       | 14.6      |
| Reinforcing layer aramid          | Dome stic aramid-fiber | -        | -        | -        | -        | -        | -        | -          | -         |

|                                   |          |          |          |          |          |          |          |          |          |
|-----------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Tear rope (outer sheath)          | 2        | 2        | 2        | 2        | 2        | 2        | 2        | 2        | 2        |
| PE outer protection thickness     | 1.5      | 1.5      | 1.5      | 1.5      | 1.5      | 1.5      | 1.5      | 1.5      | 1.5      |
| Outer diameter of PE outer sheath | 13.3±0.5 | 13.3±0.5 | 13.3±0.5 | 13.3±0.5 | 13.3±0.5 | 14.2±0.5 | 17.9±0.5 | 18.0±0.5 | 18.1±0.5 |

#### Single Sheath ADSS Cable:

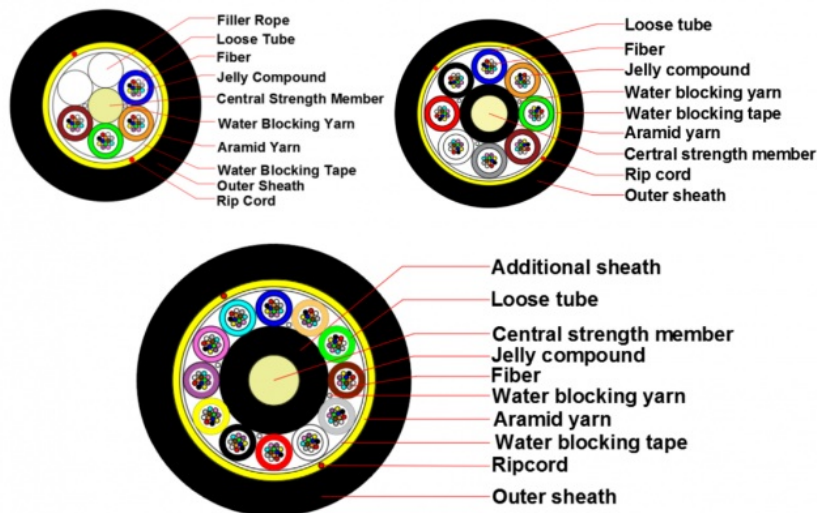

#### Construction:

This type features a single outer jacket layer. Lightweight: It's typically lighter than double sheath variants.

#### Applications:

Ideal for environments with lower risk of mechanical damage or where cable weight is a critical factor.

#### Cost-Efficient:

Generally more cost-effective due to less material usage.

#### Environmental Resistance:

Offers sufficient protection against UV rays, moisture, and minor abrasions.

### Optical Fiber Hardware for ADSS cables



Production Supplier Profile



## COMPANY PROFILE



### ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



### OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International Guangzhou city, Guangdong province, China