24 Core ADSS Fiber Optic Cable LSZH Aerial Self-**Supporting**

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: ADSS-LSZH-24B1.3 Model Number:

• Minimum Order Quantity: 2km • Price: negotiate

· Packaging Details: Wooden Spool Φ1200*750mm

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

. Supply Ability: 100km



Product Specification

• Item No.: ADSS-LSZH-24B1.3

Fiber Count: 24 CORES G625D • Fiber Type:

• Strength Member Material: FRP/ARMID YARN · Jacket Color: Black/ Customerized

• Outer /Inner Sheath

Installation Method:

Material:

Aerial/Self Supporting

· Warranty Period: 25 Years

• Highlight: Outdoor ADSS Fiber Optic Cable,

LSZH

12 Cores ADSS Fiber Optic Cable, 24 Cores ADSS Fiber Optic Cable



More Images







ADSS Fiber Optic Cable Home Fibre Outdoor Cable Types ADSS 12 Cores 24 Cores

Product Specifications

Attribute	Value		
Item no.	ADSS-LSZH-24B1.3		
Fiber Count	24 CORES		
Fiber Type	G625D		
Strength Member Material	FRP/ARMID YARN		
Jacket Color	Black/ customerized		
Outer/Inner Sheath Material	LSZH		
Installation Method	Aerial/Self supporting		
Warranty Period	25 years		

Product Description

ADSS Fiber Optic Cable Home Fibre Outdoor Cable Types ADSS 12 Cores 24 Cores

ADSS cable, as its name suggests, is an all-dielectric cable, meaning it contains no metallic components. This makes it resistant to electrical interference, allowing it to be installed in close proximity to overhead power lines without risking electrical conductivity.

ADSS cables are lightweight and designed to be self-supporting, which means they can be hung from poles or towers without the need for additional support. This makes them cost-effective and easy to install over long distances. They are commonly used in areas where electrical interference is a concern, such as near high voltage power lines.




ADSS Cable Structure Specifications

No. of fiber	8 cores	16core s	24core s	32core s	48core s	64core s	96core s	128cores	144core s
No. of fiber/tube	2cores	4cores	4cores	8cores	8cores	8cores	8cores	12+8core s	12cores
No. of Tube	4	4	6	4	6	8	12	10+1	12
Inner Diameter(mm)	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1
Diametroext erior(mm)	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1
Filler	2	2	-	2	-	-	-	-	-
Central Strength Member(FRP) mm	2.6	2.6	2.6	2.6	2.6	3.5	2.6/7.2	2.6/7.2	2.6/7.2
Tear rope (inner sheath)	2	2	2	2	2	2	2	2	2
Thickness of PE inner sheath	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
Outer diameter of PE inner sheath	10.0	10.0	10.0	10.0	10.0	10.9	14.6	14.6	14.6
Reinforcing layer aramid	Domestic aramid fiber	-	-	-	-	-	-	-	-
Tear rope (outer sheath)	2	2	2	2	2	2	2	2	2
PE outer protection thickness	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Outer diameter of PE outer sheath	13.3±0.5	13.3±0. 5	13.3±0. 5	13.3±0. 5	13.3±0. 5	14.2±0. 5	17.9±0. 5	18.0±0.5	18.1±0.5


Single Sheath ADSS Cable



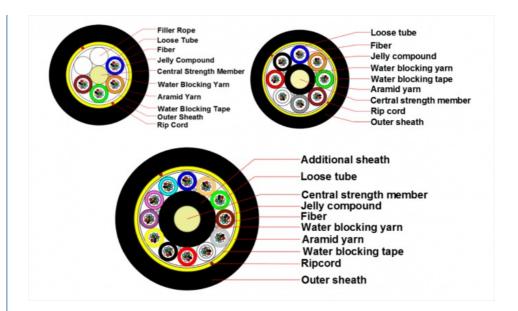

Double Sheath ADSS Cable



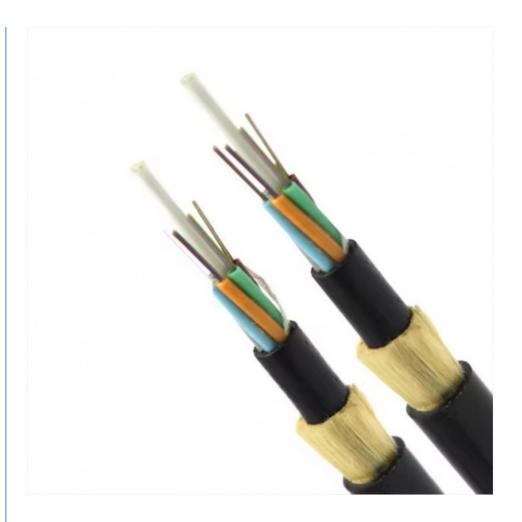

Optical Fiber Hardware for ADSS Cables



Production Supplier Profile





How to Place an OEM or Customized Order

Send your purchase intention to our email: cotton@fibercablepuls.com

Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.

Sign the contract or Proforma Invoice.

After receiving your deposit, we will start to arrange the production.

2 weeks before the completion of production, we will notify you to start contacting shipping.

guangzhou fiber cablepuls co ltd

+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China