## ADSS Fiber Optic Cable Home Fibre Outdoor Cable Types ADSS 12 Cores 24 **Cores**

## **Basic Information**

. Place of Origin: **GUANGZHOU/CHINA** Brand Name: PUNAISGD/CABLEPULS

· Certification: ISO/CE/ROSH ADSS-LSZH-24B1.3 Model Number:

• Minimum Order Quantity: 2km • Price: negotiate

· Packaging Details: Wooden Spool Φ1200\*750mm

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

. Supply Ability: 100km



## **Product Specification**

• Item No.: ADSS-LSZH-24B1.3

Fiber Count: 24 CORES G625D • Fiber Type:

• Strength Member Material: FRP/ARMID YARN · Jacket Color: Black/ Customerized

• Outer /Inner Sheath

Installation Method:

Material:

Aerial/Self Supporting

· Warranty Period: 25 Years

Highlight: Outdoor ADSS Fiber Optic Cable,

LSZH

12 Cores ADSS Fiber Optic Cable, 24 Cores ADSS Fiber Optic Cable



## More Images







## **Product Description**

## ADSS Fiber Optic Cable Home Fibre Outdoor Cable Types ADSS 12 Cores 24 Cores

ADSS cable, as its name suggests, is an all-dielectric cable, meaning it contains no metallic components. This makes it resistant to electrical interference,

allowing it to be installed in close proximity to overhead power lines without risking electrical conductivity. ADSS cables are lightweight and designed to be self-supporting, which means they can be hung from poles or towers without the need for additional support.

This makes them cost-effective and easy to install over long distances.

They are commonly used in areas where electrical interference is a concern, such as near high voltage power lines.




#### ADSS Cable Place Order Information


| Cable structure                         |                                 |             |             |             |             |             |             |               |              |
|---|---------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|---------------|--------------|
| No. of fiber                            | 8 cores                         | 16core<br>s | 24core<br>s | 32core<br>s | 48core<br>s | 64core<br>s | 96core<br>s | 128cores      | 144c<br>ores |
| No. of<br>fiber/tube                    | 2cores                          | 4cores      | 4cores      | 8cores      | 8cores      | 8cores      | 8cores      | 12+8core<br>s | 12co<br>res  |
| No. of Tube                             | 4                               | 4           | 6           | 4           | 6           | 8           | 12          | 10+1          | 12           |
| Inner<br>Diameter(mm)                   | 1.7±0.1                         | 1.7±0.1     | 1.7±0.1     | 1.7±0.1     | 1.7±0.1     | 1.7±0.1     | 1.7±0.1     | 1.7±0.1       | 1.7±<br>0.1  |
| Diámetroext erior(mm)                   | 2.5±0.1                         | 2.5±0.1     | 2.5±0.1     | 2.5±0.1     | 2.5±0.1     | 2.5±0.1     | 2.5±0.1     | じょ+() 1       | 2.5±<br>0.1  |
| Filler                                  | 2                               | 2           | -           | 2           | -           | -           | -           | -             | -            |
| CentralStrength<br>Member(FRP)<br>mm    | 2.6                             | 2.6         | 2.6         | 2.6         | 2.6         | 3.5         | 2.6/7.2     | 2.6/7.2       | 2.6/7<br>.2  |
| Tear rope<br>(inner sheath)             | 2                               | 2           | 2           | 2           | 2           | 2           | 2           | 2             | 2            |
| Thickness of PE inner sheath            | 1.2                             | 1.2         | 1.2         | 1.2         | 1.2         | 1.2         | 1.2         | 1.2           | 1.2          |
| Outer diameter<br>of PE inner<br>sheath | 10.0                            | 10.0        | 10.0        | 10.0        | 10.0        | 10.9        | 14.6        | 14.6          | 14.6         |
| Reinforcing layer aramid                | Domest<br>ic<br>aramid<br>fiber | -           | -           | _           | -           | -           | _           | -             | -            |

| Tear rope (outer sheath)      | 2       | 2       | 2       | 2       | 2       | 2       | 2       | 2        | 2    |
|-------------------------------|---------|---------|---------|---------|---------|---------|---------|----------|------|
| PE outer protection thickness | 1.5     | 1.5     | 1.5     | 1.5     | 1.5     | 1.5     | 1.5     | 1.5      | 1.5  |
| Outer diameter                |         | _       |         |         |         |         |         |          |      |
| of PE outer                   | 13.3±0. | 13.3±0. | 13.3±0. | 13.3±0. | 13.3±0. | 14.2±0. | 17.9±0. | 18.0±0.5 | 18.1 |
| sheath                        | 5       | b       | b       | 5       | 5       | 5       | 5       |          | ±0.5 |

## Single Sheath ADSS Cable:

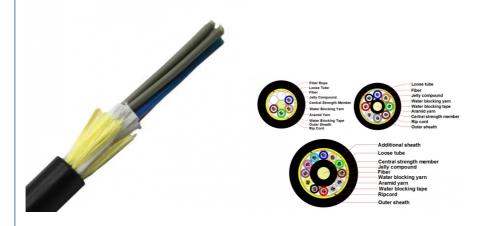

## **Double Sheath ADSS Cable:**

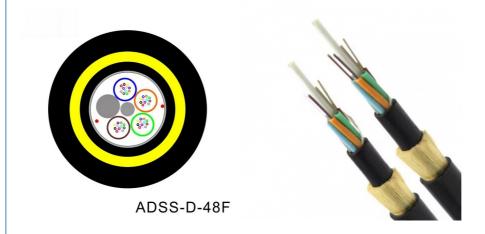

# **Optical Fiber Hardware for ADSS cables**



Production Supplier Profile





## **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**





How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
  2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

## guangzhou fiber cablepuls co ltd

+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China