ADSS Fiber Optic Cable Stranded 16 Core ADSS Span 50m Optical Fiber Cable

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** Brand Name: PUNAISGD/CABLEPULS

· Certification: ISO/CE/ROSH Model Number: ADSS-16B1.3-50M

• Minimum Order Quantity: 2km • Price: 190

· Packaging Details: Wooden Spool Φ1200*750mm

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

. Supply Ability: 100km



Product Specification

• Item No.: ADSS-16B1.3 Fiber Count: 16 CORES • Span: 50m

• Fiber Type: Single-mode/G625D • Strength Member Material: FRP/ARMID YARN

Jacket Color: Black Outer /Inner Sheath Lszh Material:

• Installation Method: Aerial Warranty Period: 25 Years

· Highlight: Stranded ADSS Fiber Optic Cable,

50m ADSS Fiber Optic Cable, 16 core ADSS Fiber Optic Cable



More Images





Our Product Introduction

Product Description

ADSS Fiber Optic Cable Stranded 16 core ADSS Span 50m Optical Fiber Cable for sale

ADSS optical cable, the optical cable uses a loose tube wound on the central strengthening member (FRP or steel wire) to form a complete round optical cable core.

and is twisted by a certain number of aramid yarns after being covered with a PE inner sheath. Finally, another layer of PE outer sheath is extruded.

The loose tube of ADSS cable is made of high temperature resistant material.

Place multiple suitable single-mode or multimode optical fibers and optical fiber moisture-proof grease into the tube. The cable core gap is filled with water blocking agent.

Application

The actual status of overhead power lines is taken into full consideration when ADSS cable is being designed. For overhead power lines under 110 kV, PE outer sheath is applied. For power lines equal to or over 110kV, AT outer sheath is applied.

The dedicate design of aramid quantity and stranding process can satisfy the demand on various.



Brand New Material

- · Smooth
- · Anti-UV
- · Long life






High Quality Fiber

- · Fast
- Long and stability transmission
- · Low Attenuation





High Quality Loose Tube

Effective protection of the fiber from internal stress and external side pressure






High Quality Metal Reinforcement

Maximum protection of fiber from mechanical tension





Class A core

- · Changfei fiber core
 · High transmission efficiency



High Quality PBT Loose Tube Material

- · Anti-aging
- $\cdot \mathsf{Good}\ \mathsf{Protection}$

06



ADSS Cable Place Order Information

Cable structure									
No. of fiber	8 cores	16core s	24core s	32core s	48core s	64core s	96core s	128cores	144c ores
No. of fiber/tube	2cores	4cores	4cores	8cores	8cores	8cores	8cores	12+8core s	12cc res
No. of Tube	4	4	6	4	6	8	12	10+1	12
Inner Diameter(mm)	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	17 /+() 7	1.7± 0.1
Diámetroext erior(mm)	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	ツ ち+ハ 1	2.5± 0.1
Filler	2	2	-	2	-	-	-	-	-
CentralStrength Member(FRP) mm	2.6	2.6	2.6	2.6	2.6	3.5	2.6/7.2	2.6/7.2	2.6/7 .2
Tear rope (inner sheath)	2	2	2	2	2	2	2	2	2

Thickness of PE inner sheath	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
Outer diameter of PE inner sheath	10.0	10.0	10.0	10.0	10.0	10.9	14.6	14.6	14.6
Reinforcing layer aramid	Domest ic aramid fiber	-	-	_	-	-	-	-	_
Tear rope (outer sheath)	2	2	2	2	2	2	2	2	2
PE outer protection thickness	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Outer diameter of PE outer sheath	13.3±0. 5	13.3±0. 5	13.3±0. 5	13.3±0. 5	13.3±0. 5	14.2±0. 5	17.9±0. 5	18.0±0.5	18.1 ±0.5

Single Sheath ADSS Cable:



Construction:

This type features a single outer jacket layer. Lightweight: It's typically lighter than double sheath variants.

Applications:

ideal for environments with lower risk of mechanical damage or where cable weight is a critical factor.


Cost-Efficient:

Generally more cost-effective due to less material usage.

Environmental Resistance:

Offers sufficient protection against UV rays, moisture, and minor abrasions.

Double Sheath ADSS Cable:

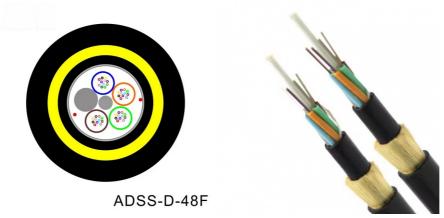

Construction:

Equipped with two layers of sheathing, an inner and an outer jacket.

Enhanced Protection:

Provides better mechanical protection, making it suitable for harsher environments.

Durability:

More resistant to abrasion, rodents, and other forms of physical damage.

Weight and Cost:

Heavier and typically more expensive than single sheath cables due to additional materials.


Applications:

Preferred in areas with higher potential for mechanical stress, such as regions with dense vegetation or frequent severe weather.

Optical Fiber Hardware for ADSS cables



Production Supplier Profile

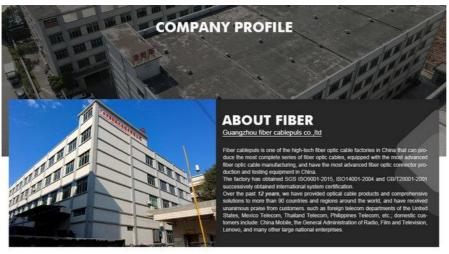



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com