ġ.



# Aerial Figure 8 Fiber Optic Cable Armoured Self-Supporting GYTC8S GYXTC8Y Figure Per Meter 8 12 24core Multimode Outdoor

#### Basic Information

• Place of Origin: GUANGZHOU/CHINA • Brand Name: PUNAISGD/CABLEPULS · Certification: ISO/CE/ROSH

 Model Number: gyxtc8s-24B1.3 Minimum Order Quantity: 2km

• Price: negotiable Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

30%TT as deposit,70%Balance before • Payment Terms:

shipping. 100km



### **Product Specification**

Supply Ability:

• Item NO.: Gyxtc8s-24b1.3 • TYPE: FIG.8 Shape • Loose Tube Material: PBT

• Strength Member: Aramid Yarn & STEEL WIRES

• Application: **OVERHEAD** • Fiber: G652D

• Highlight: Self-Supporting Aerial Figure 8 Fiber Optic

, GYXTC8Y Aerial Figure 8 Fiber Optic Cable



#### **Product Description**

Aerial Figure 8 Fiber Optic Cable Armoured Aerial Self-Supporting Fig 8structure GYTC8S GYXTC8Y Figure Per Meter 8 12 24core Multimode Fiber Optic Cable Outdoor

The "figure-eight optical cable" (also known as "8-shape optical cable") is a type of optical fiber cable designed with a distinctive "8" shaped structure. This configuration consists of two optical fibers arranged symmetrically to form a figure-eight, offering enhanced durability and protection against mechanical stress. This design makes the cable particularly suitable for outdoor or harsh environments, including aerial installations and underground applications. It is commonly used in situations that require both robust physical protection and efficient data transmission, ensuring reliable signal performance in various telecommunications and networking systems.



Messenger: 1.5mm Standed Galvanized Steel Messenger for Flexibility Fiber: Up to 24 cores, Gel filled

Jacket: Single HDPE Sheath Armor: None

Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 5.1\*10.2mm

Package: 4km/drum Weight: 47KG/KM

Model: GYXTC8S

Messenger: 1.5mm Standed Galvanized Steel Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled Jacket: Single HDPE Sheath


Armor: Steel Tape


Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 7.6\*14.5mm

Package: 4km/drum Weight: 117KG/KM





Model: GYTC8Y

Messenger: 7\*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: None

Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.1\*16.9mm

Package: 4km/drum Weight: 142KG/KM

Model: GYTC8S

Messenger: 7\*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: Steel Tape, Thickness 1mm


Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.5\*17mm

Weight: 156KG/KM


Package: 4km/drum



**GYTC8S Cable Place Order Information** 



Fiber count	6 core 8 core 12 core
Fiber Type:	G652D/G657A1/G657A2
Crush Resistance Long term:	300 (N/100MM)
Crush Resistance Short term:	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

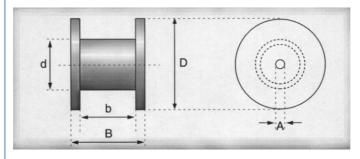

# **Production Supplier Profile**









## **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**





- How do I place an OEM or customized order?

  1) Send your purchase intention to our email: cotton@fibercablepuls.com

  2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.

  3) Sign the contract or Proforma Invoice.

  4) After receiving your deposit, we will start to arrange the production.

  5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China