




6 Core ASU ADSS Fiber Optic Cable G.652D Aerial Self-Supported

Our Product Introduction


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ASU-6B1.3
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km

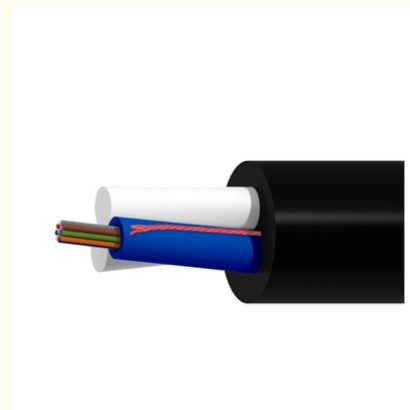

Product Specification

- ITEM NO.: ASU-6B1.3
- Fiber Count: 6
- Inner Sheath Material: PE
- Installation Method: Aerial
- Strength Member Material: FRP*2
- Cable Diameter: 7mm/8mm
- Span: 80m-120m
- Installation: Self- Supporting Aerial
- Oem: Available
- Color: Black
- Application: Telecommunication,Aerial,Telecom,Network
- Highlight: aerial asu cable, aerial fiber optic cable, 80m asu cable

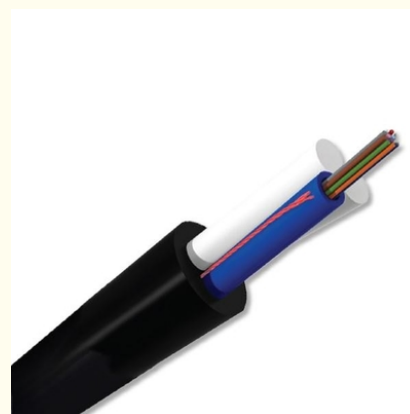

More Images



for more products please visit us on fiberoptical-cables.com

Product Description


ASU Cable 1-24 Core ASU Micro Mini ADSS-Aerial Self-Supported Dielectric Fiber Optic Cable, G.652D



Product Specifications

Attribute	Value
ITEM NO.	ASU-6B1.3
Fiber Count	6
Inner Sheath Material	PE
Installation Method	Aerial
Strength Member Material	FRP*2
Cable Diameter	7mm/8mm
Span	80m-120m
Installation	Self-supporting Aerial
Oem	Available
Color	Black
Application	Telecommunication, Aerial, Telecom, Network

Product Overview

Mini ADSS (All-Dielectric Self-Supporting) Fiber Cable is a specialized optical fiber cable designed for overhead applications, transmitting data and communication signals over long distances. This advanced version features a smaller diameter and reduced weight, making it ideal for space-constrained installations.

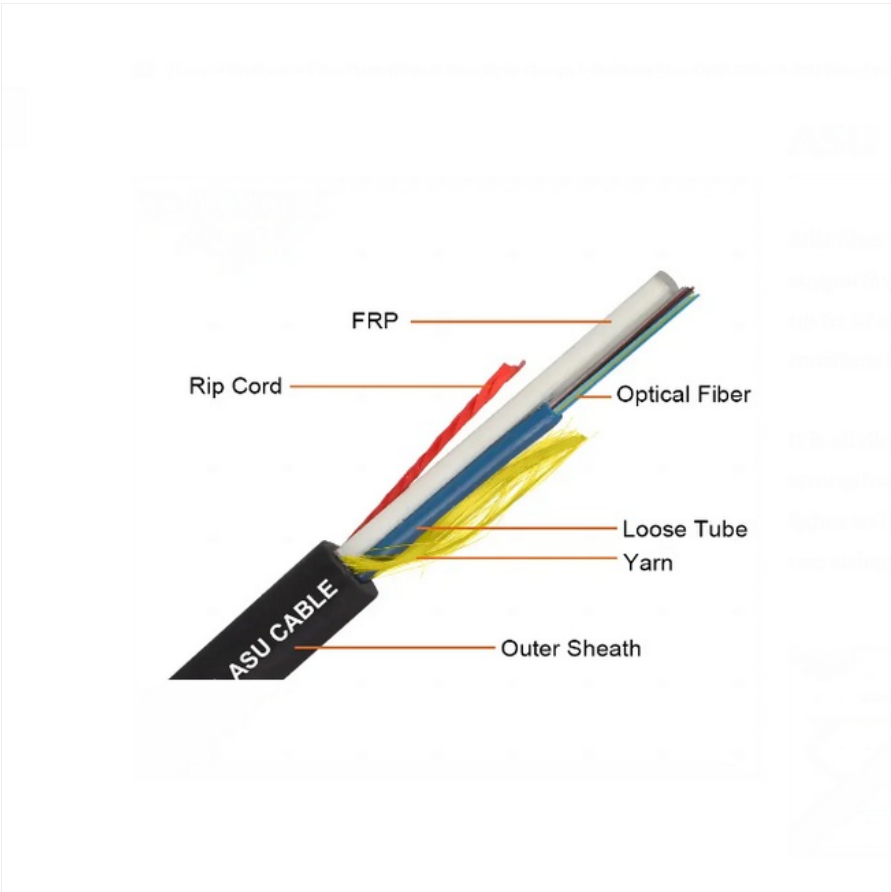

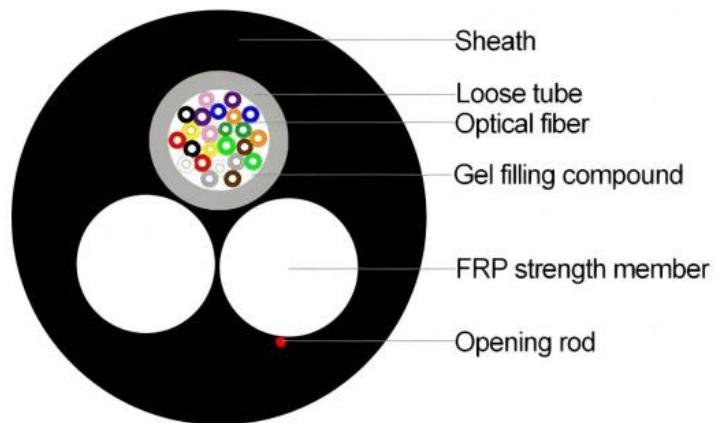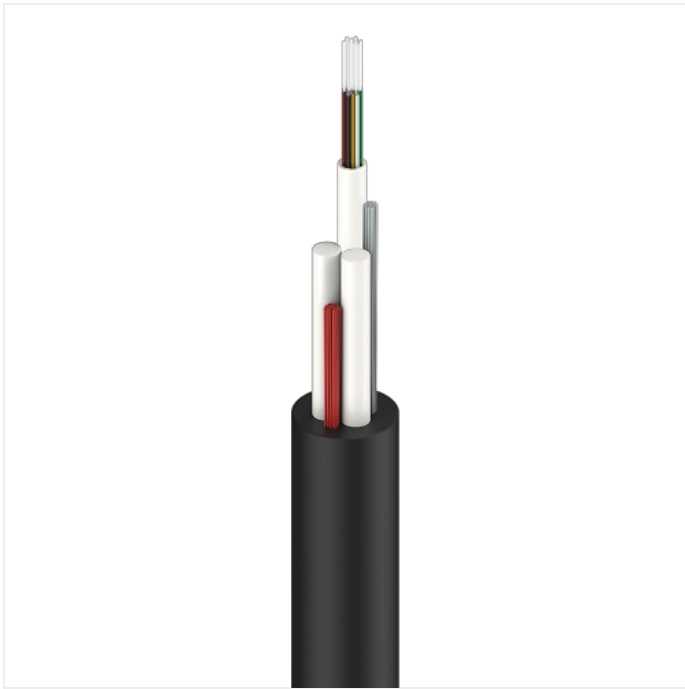

Technical Specifications

No. of cable	12	24
Fiber Model	G.652D	
Loose Tube Material	PBT	
Loose Tube Diameter	2.5±0.1mm	2.8±0.1mm
Thickness	0.32±0.05 mm	
Color	Nature	
Strength Member Material	FRP	
Strength Member Diameter	2.5±0.05 mm	2.5±0.1mm

Outer Sheath Material	PE	
Outer Sheath Color	Black	
Cable Diameter	8.0±0.2 mm	8.5±0.2 mm
Cable Weight	55±5.0 kg/km	65±5.0 kg/km
Allowable Tensile Strength	1000N	1500N
Allowable Crush Resistance	1100N/100mm	2200N/100mm
Min. bending radius	Without Tension: 10.0×Cable-φ Under Maximum Tension: 20.0×Cable-φ	
Temperature range ()	Installation: -20~+60 Transport & Storage: -40~+70 Operation: -40~+70	

Fiber Parameters

No.	Items	Unit	Specification
1	Mode Field Diameter (1310nm)	μm	9.2±0.4
1	Mode Field Diameter (1550nm)	μm	10.4±0.8
2	Cladding Diameter	μm	125.0±1.0
3	Cladding Non-Circularity	%	≤1.0
4	Core-Cladding Concentricity Error	μm	≤0.5
5	Coating Diameter	μm	245±5
6	Coating Non-Circularity	%	≤6.0
7	Cladding-Coating Concentricity Error	μm	≤12.0
8	Cable Cutoff Wavelength	nm	λ _{cc} ≤1260
9	Attenuation(max.) 1310nm	dB/km	≤0.35
9	Attenuation(max.) 1550nm	dB/km	≤0.21
9	Attenuation(max.) 1380nm	dB/km	≤0.35
9	Attenuation(max.) 1625nm	dB/km	≤0.24
10	Attenuation and wavelength 1310nm 1285-1330nm	dB/km	≤0.04
10	Attenuation and wavelength 1550nm 1525-1575nm	dB/km	≤0.03
10	Attenuation and wavelength 1550nm 1480-1580nm	dB/km	≤0.05
11	Dispersion 1288-1339nm	ps/(nm.km)	≥-3.5, ≤3.5
11	Dispersion 1271-1360nm	ps/(nm.km)	≥-5.3, ≤5.3
11	Dispersion 1480-1580nm	ps/(nm.km)	≤20
11	Dispersion 1550nm	ps/(nm.km)	≤18
12	Zero dispersion wavelength	Nm	1300-1324
13	Zero dispersion slope	ps/(nm ² ·km)	≤0.092
14	Typical value	ps/(nm ² ·km)	0.04
15	Largest individual fiber	Ps/√ km	0.2
16	Link design values	Ps/√ km	0.1
17	Two way average	1310nm-1550	≤0.01dB


Mini ADSS fiber cables provide a compact, lightweight, and durable solution for outdoor fiber optic communication, ideal for installations where space and weight are critical. Widely used in telecommunications, utility networks, and urban infrastructure, they deliver high-speed, reliable communication without requiring metallic supports or grounding systems.

Package with Roll



Fumigation Certificate

2km per Roll
Special mark as requirements




Test Report

Full seal Roll



COMPANY PROFILE

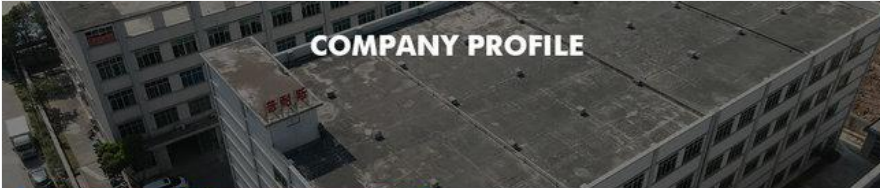

ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



Ordering Information

How to place an OEM or customized order:

Send your purchase intention to our email: cotton@fibercablepuls.com

Our sales team will contact you to confirm product specifications, packaging, printing, quantity, and other requirements

Sign the contract or Proforma Invoice

After receiving your deposit, we will begin production

Two weeks before production completion, we will notify you to arrange shipping



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong
province,China