

ADSS FIBER OPTIC CABLE HDPE 6/12/24/48/96/144 Core ADSS Fiber Cable With Aramid Yarn

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:

GUANGZHOU/CHINA

- ISO/CE/ROSH

- Payment Terms:

ADSS-36B1.3-100M 2km

PUNAISGD/CABLEPULS

190

Wooden Spool Ø1200*750mm

30%TT as deposit,70%Balance before

5-25days

shipping.

100km

- Supply Ability:



Product Specification

• Item No.:	ADSS-36B1.3-100M
Fiber Count:	96 CORES
• Fiber Type:	Single-mode/G625D
• Strength Member Material:	FRP/ARMID YARN
 Jacket Color: 	Black
Outer /Inner Sheath Material:	Lszh
 Installation Method: 	Aerial
 Warranty Period: 	25 Years
Highlight:	144 Core ADSS FIBER OPT

TIC CABLE, Aramid Yarn ADSS FIBER OPTIC CABLE, HDPE ADSS FIBER OPTIC CABLE



Our Product Introduction

ADSS FIBER OPTIC CABLE HDPE 6/12/24/48/96/144 Core ADSS Fiber Cable With Aramid Yarn

36-Core ADSS Fiber Optic Cable - Datasheet

Product Type: 36-Core ADSS (Aerial Drop Self-Supporting) Fiber Optic Cable

Application: Designed for aerial installations, suitable for telecom and data networks, including FTTH (Fiber to the Home) and long-distance backhaul systems.

Key Features:

Self-supporting, designed for outdoor aerial installations.

High resistance to environmental factors such as UV radiation, moisture, and extreme temperatures.

Anti-rodent protection to reduce the risk of damage from pests.

Suitable for use in areas without the need for additional support structures or towers.					
ADSS-SJ	ADSS- DJ	ASU(mini ADSS)			




ADSS Cable Place Order Information

Cable structure									
No. of fiber	8 cores	16core s	24core s	32core s	48core s	64core s	96core s	128core s	144c ores
No. of fiber/tube	2cores	4cores	4cores	8cores	8cores	8cores	8cores	12+8cor es	12co res
No. of Tube	4	4	6	4	6	8	12	10+1	12
Inner Diameter(mm)	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7±0.1	1.7± 0.1
Diámetroext erior(mm)	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5±0.1	2.5± 0.1
Filler	2	2	-	2	-	-	-	-	-
CentralStrength Member(FRP) mm	2.6	2.6	2.6	2.6	2.6	3.5	2.6/7.2	2.6/7.2	2.6/7. 2
Tear rope (inner sheath)	2	2	2	2	2	2	2	2	2
Thickness of PE inner sheath	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
Outer diameter of PE inner sheath	10.0	10.0	10.0	10.0	10.0	10.9	14.6	14.6	14.6

	Domest								
	ic aramid fiber	-	-	-	-	-	-	-	-
Tear rope (outer sheath)	2	2	2	2	2	2	2	2	2
PE outer protection thickness	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Outer diameter of PE outer sheath	13.3±0. 5	13.3±0. 5	13.3±0. 5	13.3±0. 5	13.3±0. 5	14.2±0. 5	17.9±0. 5	18.0±0.5	18.1 ±0.5

Optical Fiber Hardware for ADSS cables

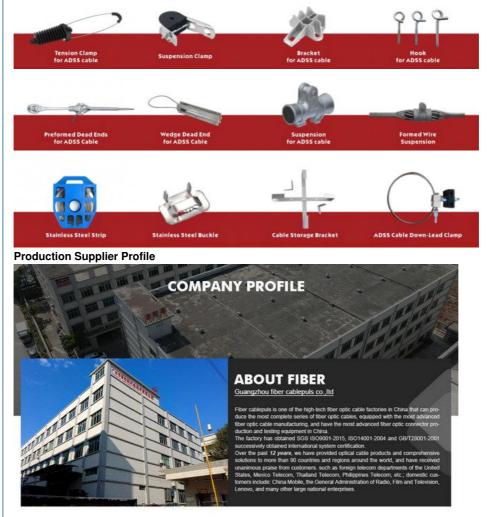



925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China