



ADSS Fiber Optic Cable 12 24 48 Core Outdoor Fiber Optic Cable Adss Optic Fiber Cable Price Cable Adss 96core

Our Product Introduction

for more products please visit us on fiberoptical-cables.com

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ADSS-96b1.3-SJ-100M
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool $\Phi 1200 \times 750$ mm
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit, 70%Balance before shipping.
- Supply Ability: 100km




Product Specification

- Type: ADSS Optical Cable-96b1.3
- Fiber Type: Single Mode
- Fiber Count: 96
- Outer Sheath: Black PE
- Inner Sheath Material: PE
- Installation Method: Aerial
- Strength Member Material: FRP/ARMID YARN
- Cable Diameter: 12.5mm
- Highlight: Outdoor Fiber Optic Cable, 12 Core Fiber Optic Cable, 48 Core Fiber Optic Cable




More Images

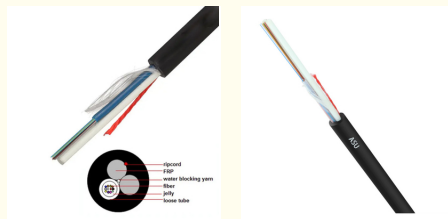

Product Description

ADSS Fiber Optic Cable 12 24 48 Core Outdoor Fiber Optic Cable Adss Optic Fiber Cable Price Cable Adss 96core
ADSS fiber optic cables are suitable for power lines, long-distance communication, and urban and rural networks, and perform exceptionally well in harsh environments, making them widely used in telecom and broadband backbone network construction. Can be installed without power outage;
Uses AT sheath with excellent tracking resistance;
Lightweight with small cable diameter, reducing the effects of ice, wind, and load on towers and supports;
Long span, with a maximum span of over 1,000 meters;
Superior tensile strength and temperature performance.

Our Product Introduction

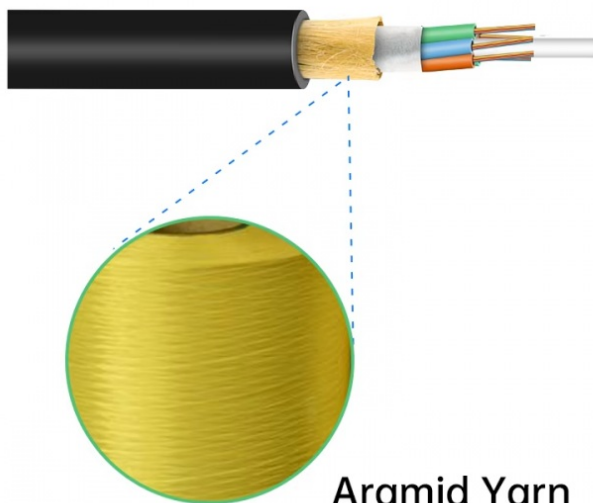

Aramid Yarn

Features and Applications



- ✓ High tensile strength
- ✓ All dielectric structure and semi-dry core design
- ✓ Small diameter and light weight
- ✓ Self-supporting aerial installation

ADSS Cable Place Order Information

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
4	1+6	4	1.9±0.1	2.0/2.0	1.6	9.5±0.2	80
6	1+6	6	2.0±0.1	2.0/2.0	1.6	9.8±0.3	80
8	1+6	4	1.9±0.1	2.0/2.0	1.6	9.8±0.3	80
12	1+6	6	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
24	1+6	12	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
36	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
48	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
96	1+8	12	2.2±0.1	2.0/3.4	1.7	11.8±0.3	123
144	1+12	12	2.2±0.1	3.0/6.2	1.7	14.5±0.3	175

Fiber Parameters

No.	Items	Unit	Specification
			G.652D
1	Mode Field Diameter	μm	9.2±0.4
		μm	10.4±0.8
2	Cladding Diameter	μm	125.0±1.0
3	Cladding Non-Circularity	%	≤1.0
4	Core-Cladding Concentricity Error	μm	≤0.5
5	Coating Diameter	μm	245±5
6	Coating Non-Circularity	%	≤6.0
7	Cladding-Coating Concentricity Error	μm	≤12.0
8	Cable Cutoff Wavelength	nm	λ _c ≤1260
9	Attenuation(max.)	1310nm	dB/km ≤0.35
		1550nm	dB/km ≤0.21
		1380nm	dB/km ≤0.35
		1625nm	dB/km ≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm	dB/km ≤0.04
		1550nm 1525-1575nm	dB/km ≤0.03
		1550nm 1480-1580nm	dB/km ≤0.05
11	Dispersion	1288-1339nm	ps/(nm.km) ≥-3.5, ≤3.5
		1271-1360nm	ps/(nm.km) ≥-5.3, ≤5.3
		1480-1580nm	ps/(nm.km) ≤20
		1550nm	ps/(nm.km) ≤18
12	Zero dispersion wavelength	Nm	1300-1324
13	Zero dispersion slope	ps/(nm ² ·km)	≤0.092
14	Typical value	ps/(nm ² ·km)	0.04
15	Largest individual fiber	Ps/√ km	0.2
16	Link design values	Ps/√ km	0.1
17	Two way average	1310nm-1550	≤0.01dB



ADSS-D-48F



Optical Fiber Hardware for ADSS cables



Production Supplier Profile

COMPANY PROFILE

ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained ISO 9001:2015, ISO 14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc. domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



+8613687956390 cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China