



# FTTH Outdoor Drop Cable GJYXCH 1 Core Steel Wire LSZH 1km 2km

#### **Basic Information**

Place of Origin:
GUANGZHOU/CHINA

Brand Name: CABLEPULSCertification: ISO/CE/ROSH

Model Number: FTTH DROP CABLE 1 core

Minimum Order Quantity: 2kmPrice: negotiate

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

• Payment Terms: 30%TT as deposit,70%Balance before

shipping.

• Supply Ability: 100km



# **Product Specification**

Cable Model: GJYXCH/GJYXFCH-1b6

Outer Sheath Color: BlackCable Length: 1km 2km

• Feature: Flame Retardant Characteristics

• Jacket: LSZH

• Installation Style: Indoor & Outdoor Self-Support Drop Cable

Messenger Wire: Steel

• Highlight: 1 Core FTTH Outdoor Drop Cable,

1km FTTH Outdoor Drop Cable, G657A1 FTTH Outdoor Drop Cable



#### FTTH Outdoor Drop Cable 1 Core 3 Steel Wire Sling G657A1 GJYXCH


#### **Product Specifications**

| Attribute          | Value                                    |
|--------------------|--|
| Cable Model        | GJYXCH/GJYXFCH-1b6                       |
| Outer Sheath Color | Black                                    |
| Cable Length       | 1km 2km                                  |
| Feature            | Flame retardant characteristics          |
| Jacket             | LSZH                                     |
| Installation Style | Indoor & Outdoor Self-Support Drop Cable |
| Messenger Wire     | Steel                                    |

#### **Key Features**

Two parallel FRP strength members ensure excellent crush resistance to protect the fiber Simple structure with lightweight design for high practicability

Novel flute design for easy stripping and splicing, simplifying installation and maintenance Low smoke zero halogen and flame retardant sheath for enhanced safety

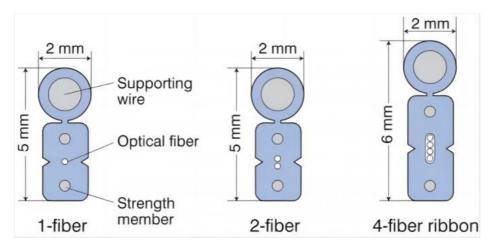

#### **Technical Parameters for Steel Wire Drop Cable**

| Cable code | Fiber count | Cable size (mm)         | Cable weight (KG/KM) | Tensile strength long/short term(N) | Crush resistance long/short term (N/100mm) | Bending radius static/dynamic (mm) |
|------------|-------------|-------------------------|----------------------|-------------------------------------|--|------------------------------------|
| GJYXC<br>H | 1           | (2.0±0.1)×(5<br>.2±0.1) | 19                   | 300/600                             | 1100/2200                                  | 15/30                              |
| GJYXC<br>H | 2           | (2.0±0.1)×(5<br>.2±0.1) | 19                   | 300/600                             | 1100/2200                                  | 15/30                              |
| GJYXC<br>H | 4           | (2.0±0.1)×(5<br>.2±0.1) | 19                   | 300/600                             | 1100/2200                                  | 15/30                              |
| GJYXC<br>H | 8           | (2.0±0.1)×(5<br>.2±0.1) | 27                   | 300/600                             | 1100/2200                                  | 15/30                              |
| GJYXC<br>H | 12          | (2.0±0.1)×(5<br>.2±0.1) | 27                   | 300/600                             | 1100/2200                                  | 15/30                              |

#### **Loading Quantity Suggestion**

| Container Type  | 1KM/roll | 2KM/roll |
|-----------------|----------|----------|
| 20'GP container | 812KM    | 1000KM   |

| 40'HQ container | 1900KM | 2000KM |
|-----------------|--------|--------|
|-----------------|--------|--------|

#### **Additional Specifications**

| Fiber count           | 1/2/4   |
|-----------------------|---|
| Tight buffer          | LSZH, White   |
| Tight buffer diameter | 0.90±0.05mm   |
| Fiber Type            | G657A1/A2   |
| Strength member       | Glass yarn/aramid yarn                                  |
| Outer sheath          | LSZH Lower smoke zero halogen frame retardant & UV Anti |



## **Ordering Information**

### How to Place an OEM or Customized Order


Send your purchase intention to our email:cotton@fibercablepuls.com


Our sales team will contact you to confirm product specifications, packaging, printing, quantity, and other requirements

Sign the contract or Proforma Invoice

After receiving your deposit, we will arrange production

2 weeks before production completion, we will notify you to arrange shipping

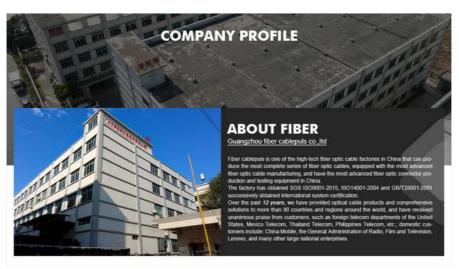

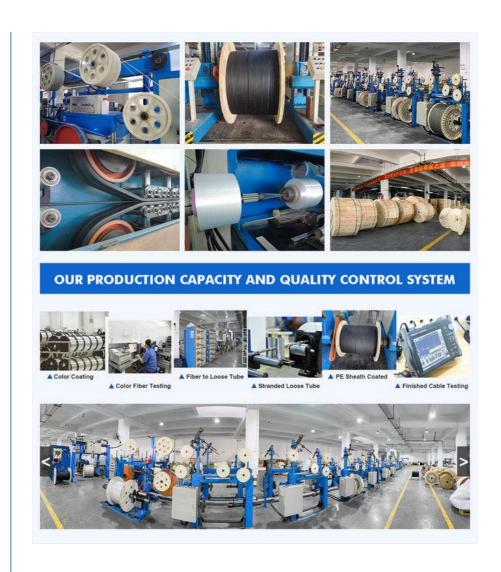



# guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China