




FTTH Outdoor Drop Cable GJYXCH 4b6 LSZH 1km 2km Steel Wire

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: FTTH DROP CABLE 4 core
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km

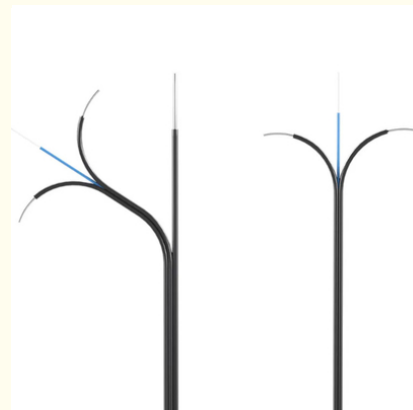

Product Specification

- Cable Model: GJYXCH/GJYXFCH-4b6
- Outer Sheath Color: Black/white
- Cable Length: 1 km 2km
- Feature: Flame Retardant Characteristics
- Jacket: LSZH
- Installation Style: Indoor & Outdoor Self-Support Drop Cable
- Messenger Wire: Steel
- Highlight: Single Meter FTTH Outdoor Drop Cable, G657A1 FTTH Outdoor Drop Cable

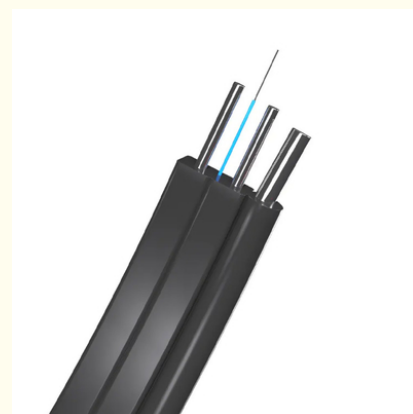

More Images



Product Description

FTTH Outdoor Drop Cable G657A1

Single Meter Mini Drop Cable with 1/2/4/6/8/12 Core Fiber Optic Wire for FTTH Applications

Product Specifications

Cable Model	GJYXCH/GJYXFCH-4b6
Outer Sheath Color	Black/white
Cable Length	1km / 2km
Feature	Flame retardant characteristics
Jacket	LSZH (Low Smoke Zero Halogen)
Installation Style	Indoor & Outdoor Self-Support Drop Cable
Messenger Wire	Steel

Product Description

The optical fiber unit is positioned in the center with two parallel FRP or steel wires placed at the sides for reinforcement. The cable is completed with a black or colored LSZH sheath.

Key Features


- Special low-bend-sensitivity fiber provides high bandwidth and excellent transmission properties
- Two parallel steel wire or FRP strength members ensure crush resistance
- Single steel wire or messengers provide additional tensile strength
- Simple structure with light weight and high practicability
- Novel flute design for easy stripping and splicing
- Low smoke, zero halogen and flame retardant sheath

Technical Parameters

Model No.	Count	Cable Size (mm)	Weight (kg/km)	Tension (N)	Crush (N/100mm)	Bending Radius (mm)
GJYXCH-1Xn	1	(2.0±0.1)×(5.0±0.1)	20	300/600	1000/2200	15/30
GJYXCH-2Xn	2	(2.0±0.1)×(5.0±0.1)	20	300/600	1000/2200	15/30

Fiber Parameters

Parameter	Unit	Specification
Mode Field Diameter (1310nm)	μm	9.2±0.4
Cladding Diameter	μm	125.0±1.0
Attenuation (1550nm)	dB/km	≤0.21
Dispersion (1550nm)	ps/(nm.km)	≤18

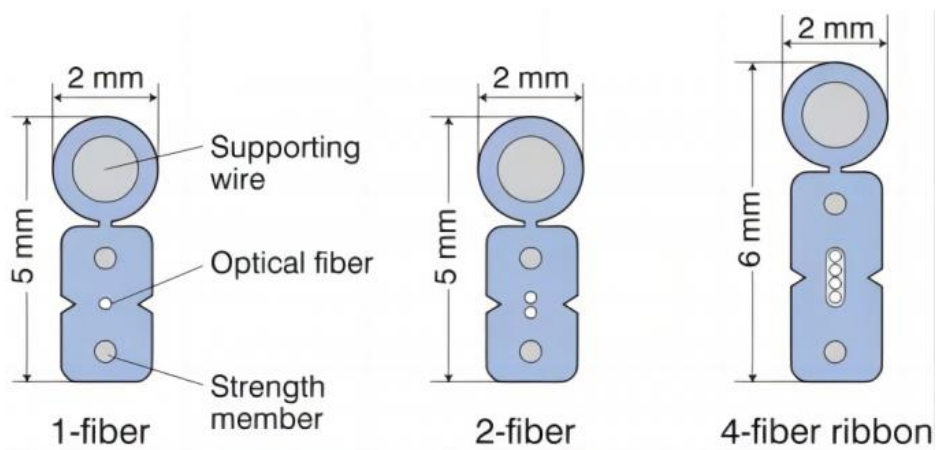

Ordering Information

Container Loading Quantity:

Container Type	1KM/roll	2KM/roll
20'GP container	812KM	1000KM
40'HQ container	1900KM	2000KM

Custom Order Process


Send your purchase intention to our email: cotton@fibercablepuls.com

Our sales team will confirm product specifications and requirements

Sign the contract or Proforma Invoice

Production begins after receiving deposit

Shipping arrangements made 2 weeks before production completion

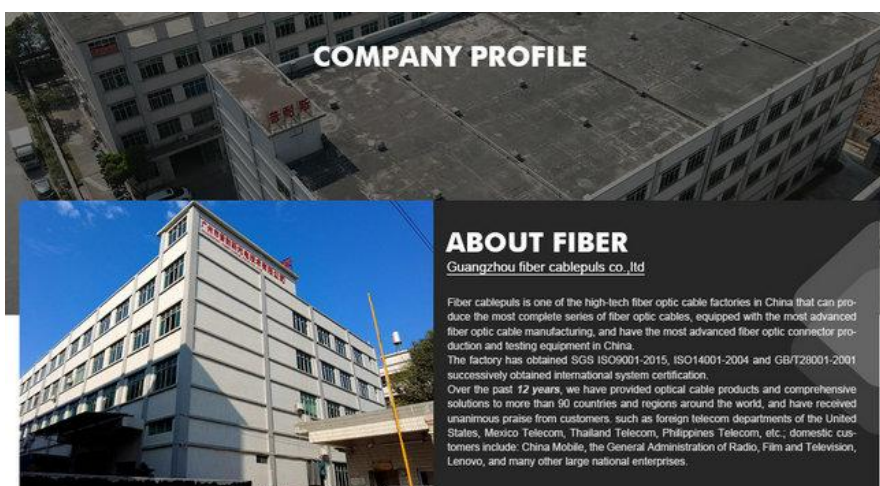



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International Guangzhou city, Guangdong province, China