



## Outdoor Armored Fiber Optic Cable GYXTW 12 Core Single-Mode Aerial

Our Product Introduction

### Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYXTW-12B1.3
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km



### Product Specification

- Model No: GYXTW-12B1.3
- Use: Aerial
- Loose Tube Material: PBT With Jelly
- Cable Diameter: 6mm 7mm 8mm
- Samples: Free
- Fiber Grade: G652D/ G657A1
- Waterblocking Material: Water Blocking Tape Or Filling Compound
- Steel Wire: 0.7\*2mm/1\*2mm
- Cable Color: Black
- Highlight: **Armored Outdoor Fiber Optic Cable, Single-Mode Outdoor Fiber Optic Cable, 24 Core Outdoor Fiber Optic Cable**



### More Images



for more products please visit us on [fiberoptical-cables.com](http://fiberoptical-cables.com)

Product Description


Outdoor Fiber Optic Cable Single-Mode Armored 2/4/6/8/12/16/24 Core Central Loose Tube GYXTW Cable

Product Specifications

Model No	GYXTW-12B1.3
Use	Aerial
Loose Tube Material	PBT with Jelly
Cable Diameter	6mm 7mm 8mm
Samples	free
Fiber Grade	G652D/ G657A1
Waterblocking Material	Water Blocking Tape Or Filling Compound
Steel Wire	0.7*2mm/1*2mm
Cable Color	Black

Product Description

The fibers, 250μm, are positioned in a loose tube made of a high modulus plastic. The tubes are filled with a water-resistant filling compound. The tube is wrapped with a layer of PSP longitudinally. Between the PSP and the loose tube water-blocking material is applied to keep the cable compact and watertight. Two parallel steel wires are placed at the two sides of the steel tape. The cable is completed with a polyethylene (PE) sheath.

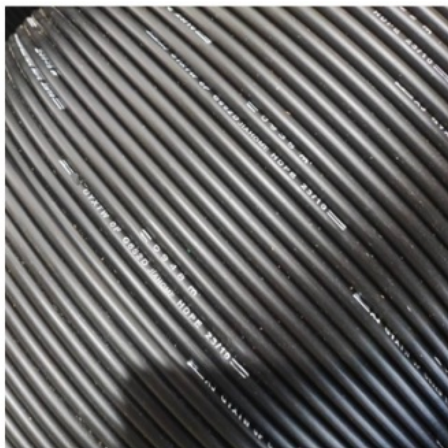

## APPLICATION



Smart TV



Computer



Notebook



Router



Printer



CCTV



Switch



Switchboard

### Cable Technical Data

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
2	1	2	1.7±0.1	1.0/1.0	1.6	8.0±0.2	57
4	1	4	1.85±0.1	1.0/1.0	1.6	8.0±0.2	58
6	1	6	1.9±0.1	1.0/1.0	1.6	8.0±0.2	58
8	1	8	2.0±0.1	1.0/1.0	1.6	8.0±0.2	60
12	1	12	2.2±0.1	1.0/1.0	1.6	8.0±0.2	60

### Fiber Parameters (G.652D)

No.	Items	Unit	Specification
1	Mode Field Diameter (1310nm)	μm	9.2±0.4
1	Mode Field Diameter (1550nm)	μm	10.4±0.8
2	Cladding Diameter	μm	125.0±1.0
3	Cladding Non-Circularity	%	≤1.0
4	Core-Cladding Concentricity Error	μm	≤0.5
5	Coating Diameter	μm	245±5
6	Coating Non-Circularity	%	≤6.0
7	Cladding-Coating Concentricity Error	μm	≤12.0
8	Cable Cutoff Wavelength	nm	λ <sub>cc</sub> ≤1260
9	Attenuation(max.) (1310nm)	dB/km	≤0.35
9	Attenuation(max.) (1550nm)	dB/km	≤0.21
9	Attenuation(max.) (1380nm)	dB/km	≤0.35
9	Attenuation(max.) (1625nm)	dB/km	≤0.24

### Cable Marking & Fibers Colors

COMPANY Fiber cable name N\*cores G.652D 2024 XXXXm

The marking is printed every 1 meter; "G.652D" means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber.

Also can according to client cable marking.


Steel wire 0.7x2

Loose tube :2.2mm

Diameter :7.1



Ordering Information

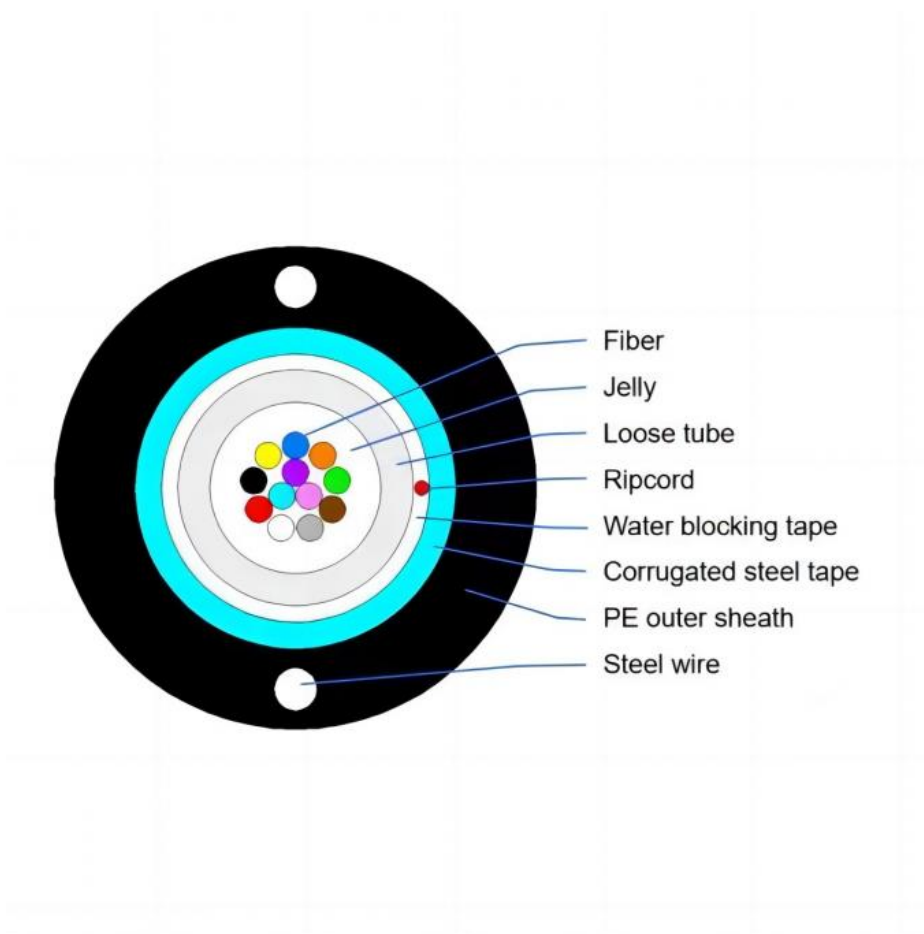

#### How to Place an OEM or Customized Order

Send your purchase intention to our email: [cotton@fibercablepuls.com](mailto:cotton@fibercablepuls.com)


Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.

Sign the contract or Proforma Invoice.


After receiving your deposit, we will start to arrange the production.

2 weeks before the completion of production, we will notify you to start contacting shipping.

## Production Supplier Profile

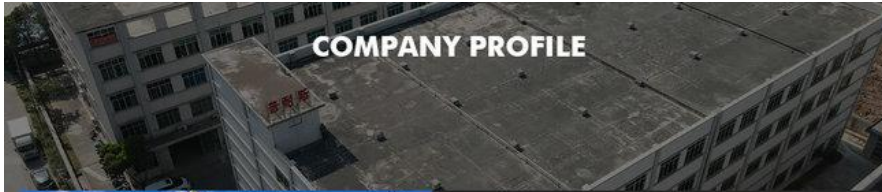

### COMPANY PROFILE



### ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers. such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



## OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



**guangzhou fiber cablepuls co ltd**



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China