₫

Aerial Figure 8 Fiber Optic Cable GYTC8S Figure 6 Cores 48 Core Multimode **Fiber Optic Cable With Steel**

Basic Information

• Place of Origin: GUANGZHOU/CHINA • Brand Name: PUNAISGD/CABLEPULS · Certification: ISO/CE/ROSH

 Model Number: gyxtc8s-6B1.3 Minimum Order Quantity: 2km


• Price: negotiable

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

30%TT as deposit,70%Balance before • Payment Terms:

shipping. 100km



Product Specification

Supply Ability:

• Item NO.: Gyxtc8s-6b1.3 • TYPE: FIG.8 Shape • Loose Tube Material: PBT

• Strength Member: Aramid Yarn & STEEL WIRES

• Application: **OVERHEAD** • Fiber: G652D

• Highlight: Aerial Figure 8 Fiber Optic Cable,

48 Core Fiber Optic Cable, Multimode Fiber Optic Cable



More Images



Product Description

Aerial Figure 8 Fiber Optic Cable GYTC8S Figure 6 Cores 48 Core Multimode Fiber Optic Cable With Steel

6 Core Small Figure 8 self-support armoured (1x7) Fiber optic cable Single jacket and single loose tube. The cables are mainly designed for digital or analog transmission communication, Used for core net, city local net and CCTV IP networks for applied to aerial.

Products Characteristic: - 6 Core Fiber optic cable - Single-mode 9/125um (G.652.D) - The messenger wire 1.0mmx7 made from Galvanized stranded steel wire - Loose tube filling compound : Thyrotrophic jelly compound - Loose tube material:PBT (Natural or white color) - Loose tube diameter: 2.6mm - Water blocking tape - Ripcord material: Aramid yarn - Sheath material: HDPE



Messenger: 1.5mm Standed Galvanized Steel Messenger for Flexibility Fiber: Up to 24 cores, Gel filled

Jacket: Single HDPE Sheath Armor: None

Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 5.1*10.2mm

Package: 4km/drum Weight: 47KG/KM

Model: GYXTC8S

Messenger: 1.5mm Standed Galvanized Steel Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled Jacket: Single HDPE Sheath


Armor: Steel Tape


Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 7.6*14.5mm

Package: 4km/drum Weight: 117KG/KM





Model: GYTC8Y

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: None

Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.1*16.9mm

Package: 4km/drum Weight: 142KG/KM

Model: GYTC8S

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: Steel Tape, Thickness 1mm


Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.5*17mm

Weight: 156KG/KM


Package: 4km/drum



GYTC8S Cable Place Order Information



Fiber count	6 core 8 core 12 core
Fiber Type:	G652D/G657A1/G657A2
Crush Resistance Long term:	300 (N/100MM)
Crush Resistance Short term:	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

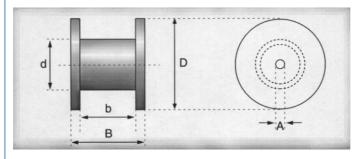

Production Supplier Profile









OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





- How do I place an OEM or customized order?

 1) Send your purchase intention to our email: cotton@fibercablepuls.com

 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.

 3) Sign the contract or Proforma Invoice.

 4) After receiving your deposit, we will start to arrange the production.

 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China