




GYTC8S Aerial Figure 8 Fiber Optic Cable 6 Core G652D Steel Reinforced

Our Product Introduction

for more products please visit us on fiberoptical-cables.com

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: gyxtc8s-6B1.3
- Minimum Order Quantity: 2km
- Price: negotiable
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km

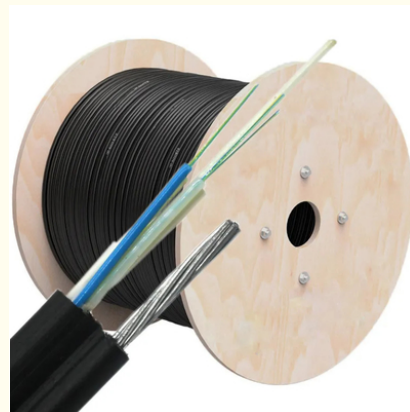

Product Specification

- Item NO.: Gyxtc8s-6b1.3
- TYPE: FIG.8 Shape
- Loose Tube Material: PBT
- Strength Member: Aramid Yarn & STEEL WIRES
- Application: OVERHEAD
- Fiber: G652D
- Highlight: **Aerial Figure 8 Fiber Optic Cable, 48 Core Fiber Optic Cable, Multimode Fiber Optic Cable**



More Images



Product Description

Aerial Figure 8 Fiber Optic Cable GYTC8S Figure 6 Cores 48 Core Multimode Fiber Optic Cable With Steel

Product Specifications

Attribute	Value
Item NO.	gyxtc8s-6b1.3
TYPE	FIG.8 shape
Loose Tube Material	PBT
Strength member	aramid yarn & STEEL WIRES
Application	OVERHEAD
Fiber	G652D


Product Description

6 Core Small Figure 8 self-support armored (1x7) fiber optic cable with single jacket and single loose tube. Designed for digital or analog transmission communication, ideal for core networks, city local networks, and CCTV IP networks in aerial applications.

- 6 Core Fiber optic cable
- Single-mode 9/125um (G.652.D)
- Messenger wire: 1.0mmx7 galvanized stranded steel wire
- Loose tube filling: Thyrotrophic jelly compound
- Loose tube material: PBT (Natural or white color)
- Loose tube diameter: 2.6mm
- Water blocking tape included
- Ripcord material: Aramid yarn
- Sheath material: HDPE



Model: GYTC8S
 Messenger: 1.5mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 24 cores, Gel filled
 Jacket: Single HDPE Sheath
 Armor: Steel Tape
 Tension Strength: 1000(Short term)
 300(Long term)
 Cable Diameter: 7.6*14.5mm
 Package: 4km/drum
 Weight: 117KG/KM

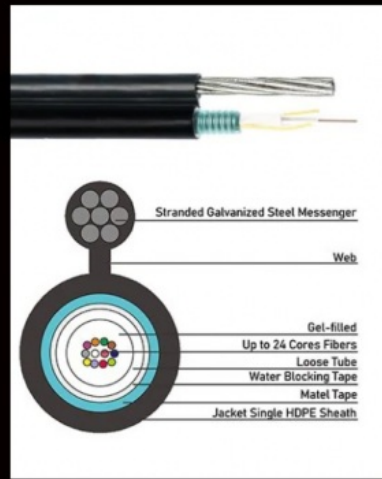

Model: GYTC8Y
 Messenger: 7*1.0mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 288 cores, Gel filled
 Jacket: Single MDPE Sheath
 Water Block: Water Blocking or Gel-filled
 Armor: None
 Tension Strength: 3000(Short term)
 1000(Long term)
 Cable Diameter: 9.1*16.9mm
 Package: 4km/drum
 Weight: 142KG/KM


Model: GYTC8S
 Messenger: 7*1.0mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 288 cores, Gel filled
 Jacket: Single MDPE Sheath
 Water Block: Water Blocking or Gel-filled
 Armor: Steel Tape, Thickness 1mm
 Tension Strength: 3000(Short term)
 1000(Long term)
 Cable Diameter: 9.5*17mm
 Package: 4km/drum
 Weight: 156KG/KM




GYTC8S Cable Order Information




Fiber count	6 core, 8 core, 12 core
Fiber Type	G652D/G657A1/G657A2
Crush Resistance (Long term)	300 (N/100MM)
Crush Resistance (Short term)	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

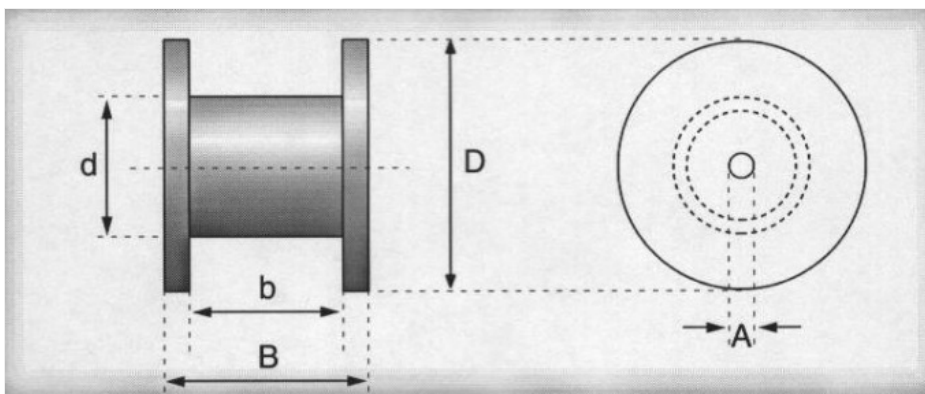

Production Supplier Profile

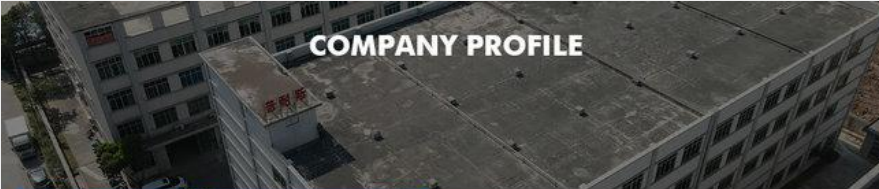

COMPANY PROFILE



ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 80 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How to Place an OEM or Customized Order

Send your purchase intention to our email: cotton@fibercablepuls.com

Our sales team will contact you to confirm product specifications, packaging, printing, quantity, and other requirements

Sign the contract or Proforma Invoice

After receiving your deposit, we will begin production

2 weeks before production completion, we will notify you to arrange shipping



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International
Guangzhou city, Guangdong
province, China