# Aerial Figure 8 Fiber Optic Cable G652D GYTC8S Cable Fiber Optical Outdoor Aerial Figure 8 With Steel Tape

#### Basic Information

Place of Origin: GUANGZHOU/CHINA
 Brand Name: PUNAISGD/CABLEPULS
 Certification: ISO/CE/ROSH

Model Number: gytc8s-48B1.3

Minimum Order Quantity: 2kmPrice: negotiable

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

• Payment Terms: 30%TT as deposit,70%Balance before

shipping. 100km



## **Product Specification**

Supply Ability:

Item NO.: Gytc8s-48b1.3
TYPE: FIG.8 Shape
Loose Tube Material: PBT

Strength Member: Aramid Yarn & STEEL WIRES

Application: OVERHEADFiber: G652D

Highlight: Aerial Figure 8 Fiber Optic Cable,
 Fiber Optic Cable With Steel Tape



## More Images



### **Product Description**

Aerial Figure 8 Fiber Optic Cable G652D GYTC8S Cable Fiber Optical Outdoor Aerial Figure 8 With Steel Tape

Small Figure 8 Armored cables are self-supporting cable designed for aerial installation. The optical fiber cable design provides easy and economical one-step installation and stable performance over a wide temperature range and is compatible with any telecommunication optical fiber cable. The cable inside loose tube filled with a water-resistant filling compound or design for water blocked with water blocking material in side cable. The cable protect animal by corrugated steel armored around the cable core save cost maintenance or use for long term some applications.



Messenger: 1.5mm Standed Galvanized Steel Messenger for Flexibility Fiber: Up to 24 cores, Gel filled

Jacket: Single HDPE Sheath Armor: None

Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 5.1\*10.2mm

Package: 4km/drum Weight: 47KG/KM

Model: GYXTC8S

Messenger: 1.5mm Standed Galvanized Steel Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled Jacket: Single HDPE Sheath


Armor: Steel Tape


Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 7.6\*14.5mm

Package: 4km/drum Weight: 117KG/KM





Model: GYTC8Y

Messenger: 7\*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: None

Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.1\*16.9mm

Package: 4km/drum Weight: 142KG/KM

Model: GYTC8S

Messenger: 7\*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: Steel Tape, Thickness 1mm


Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.5\*17mm

Weight: 156KG/KM


Package: 4km/drum



**GYTC8S Cable Place Order Information** 



Fiber count	6 core 8 core 12 core
Fiber Type:	G652D/G657A1/G657A2
Crush Resistance Long term:	300 (N/100MM)
Crush Resistance Short term:	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

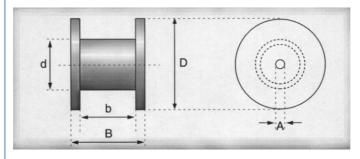

# **Production Supplier Profile**









# **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**





- How do I place an OEM or customized order?

  1) Send your purchase intention to our email: cotton@fibercablepuls.com

  2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.

  3) Sign the contract or Proforma Invoice.

  4) After receiving your deposit, we will start to arrange the production.

  5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China