ġ.

Aerial Figure 8 Fiber Optic Cable Manufacturing Outdoor Optical Fiber Figure 8 Cable 12 Core Fiber Optic Cable GYTC8S

Basic Information

• Place of Origin: GUANGZHOU/CHINA • Brand Name: PUNAISGD/CABLEPULS Certification: ISO/CE/ROSH

 Model Number: gytc8s-12B1.3

 Minimum Order Quantity: 2km • Price: negotiable

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

30%TT as deposit,70%Balance before • Payment Terms:

shipping. 100km



Product Specification

Supply Ability:

Item NO.: Gytc8s-12b1.3 • TYPE: FIG.8 Shape • Loose Tube Material: PBT

Strength Member: Aramid Yarn & STEEL WIRES

• Application: **OVERHEAD** • Fiber: G652D

• Highlight: Aerial Figure 8 Fiber Optic Cable

Figure 8 Outdoor Fiber Optic Cable GYTC8S Fiber Optic Cable



More Images





Product Description

Aerial Figure 8 Fiber Optic Cable Manufacturing Outdoor Optical Fiber Figure 8 Cable 12 Core Fiber Optic Cable GYTC8S

- Applications
 Adopted to outdoor aerial self-supporting installation
- Long-distance communication, local trunk line, CATV & computer networks system, Telecom or outside plant campus
- backbone applications
 Ethernet LAN Network, CCTV, Network Camera, PLC
- Mechanically, rugged, cable design suitable for: Aerial

Product Construction

- Fiber :
 4-12 Core fibers (Single-mode or Multi-mode)
- Loose tube gel-filled
- Color-coding per TIA/EIA 598-A

Central Strength Member

- FRP rod (Fibre Reinforcement Plastic) Option: Steel wire rod Ripcords
- 1 ripcords made from Polyester cords or Plastic thread. Color: Red Water blocking elements :

· Water blocking tape

· Corrugated coated steel tape Outer Jacket :

Black UV-and HDPE

- Messenger Wire :
 1.0mm x 7 Galvanized stranded steel wire Max Tensile:

Max tensile load: (short term) 3000N

• Span length 70M



Model: GYXTC8Y

Messenger: 1.5mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled

Jacket: Single HDPE Sheath

Armor: None

Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 5.1*10.2mm

Package: 4km/drum Weight: 47KG/KM

Model: GYXTC8S

Messenger: 1.5mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled

Jacket: Single HDPE Sheath


Armor: Steel Tape

Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 7.6*14.5mm

Package: 4km/drum Weight: 117KG/KM





Model: GYTC8Y

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: None

Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.1*16.9mm

Package: 4km/drum Weight: 142KG/KM

Model: GYTC8S

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: Steel Tape, Thickness 1mm

Tension Strength: 3000(Short term)

1000(Long term) Cable Diameter: 9.5*17mm


Package: 4km/drum Weight: 156KG/KM



GYTC8S Cable Place Order Information



Fiber count	6 core 8 core 12 core
Fiber Type:	G652D/G657A1/G657A2
Crush Resistance Long term:	300 (N/100MM)
Crush Resistance Short term:	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

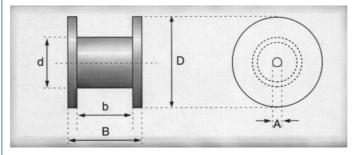

Production Supplier Profile





+8613687956390 cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





- How do I place an OEM or customized order?

 1) Send your purchase intention to our email: cotton@fibercablepuls.com

 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.

 3) Sign the contract or Proforma Invoice.

 4) After receiving your deposit, we will start to arrange the production.

 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China