Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: GYTS-36B1.3 Model Number:

• Minimum Order Quantity: 2km

• Price: negotiable


Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

100km • Supply Ability:



Product Specification

GYTS-36B1.3 • Item No.: · Armored Type: Steel Tape Steel Wire • Strength Member: PΕ Jacket Material:

10.6±0.2 Mm · Cable Diameter: Application: Pipeline • Warranty Period: 25 Years

. Highlight: 36 Core Duct Cable, SM 9/125um Duct Cable,

Outdoor Duct Cable



More Images





Our Product Introduction

Duct Cable 36 Core Outdoor Duct Armoured Multi-Loose Tube SM 9/125um G.652.D

Product Specifications

| Attribute | Value |
|-----------------|-------------|
| Item No. | GYTS-36B1.3 |
| Armored Type | Steel Tape |
| Strength Member | Steel wire |
| Jacket Material | PE |
| Cable Diameter | 10.6±0.2 mm |
| Application | Pipeline |
| Warranty Period | 25 years |

Product Description

Duct armoured Multi-loose tube corrugate steel armor which provides extra crush-resistance and rodent protection. Outdoor armor designed for lashed aerial, duct, underground conduit environments, direct buried supported applications LAN Networks, Data communication, telecommunication, CCTV, network IP Camera and more.

Applications

Adopted to outdoor aerial self-supporting installation

Long-distance communication, local trunk line, CATV & computer networks system

Telecom or outside plant campus backbone applications

Ethernet LAN Network, CCTV, Network Camera, PLC

Loose Tube Ducts Armoured Cable

Product Construction


Fiber: 2-216 Core fibers, Loose tube gel-filled, Color-coding per TIA/EIA 598-A


Central Strength Member: FRP rod (Fibre Reinforcement Plastic) Option: Steel wire rod

Ripcords: 1 ripcords made from aramid yarn

Armor: Corrugated coated steel tape

Outer Jacket: Black UV-and HDPE, Made to order cable marking

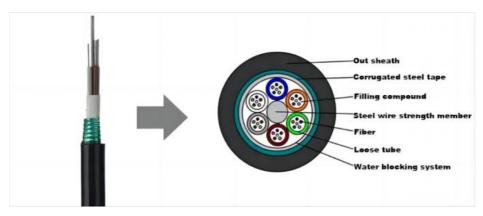

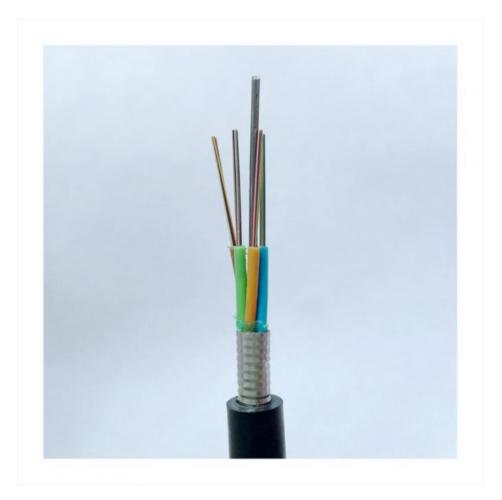

GYTS Cable Technical Data

Cable Specifications

| Cable Type | Fiber Count | Strande d Units | Cable Diameter (mm) | Cable Weight (kg/km) | Bending Radius Dynamic/Static (MM) | Tensile Strength Long/Short Term (N) | Crush Resistance Long/Short Term (N/100 mm) |
|----------------------|----------------|--------------------|---------------------------|----------------------------|---------------------------------------|---|---|
| GYTA≤ 60 | ≤60 | 5 | 9.8 | 108 | 20D/10D | 240/800 | 300/1000 |
| GYTA- 62~72 | 62~72 | 6 | 10.4 | 129 | 20D/10D | 300/850 | 300/1000 |
| GYTA- 74~96 | 74~96 | 8 | 10.6 | 132 | 20D/10D | 350/1200 | 300/1000 |
| GYTA- 98~120 | 98~12 0 | 10 | 12.1 | 161 | 20D/10D | 450/1400 | 300/1000 |
| GYTA- 122~14 4 | 122~1 44 | 12 | 13.6 | 198 | 20D/10D | 700/2000 | 300/1000 |

Fiber Parameters

| No. | Items | Unit | Specification G.652D |
|-----|--------------------------------------|--------------------------------------|--|
| 1 | Mode Field Diameter | 1310nm 1550nm | μm 9.2±0.4 μm 10.4±0.8 |
| 2 | Cladding Diameter | μm | 125.0±1.0 |
| 3 | Cladding Non-Circularity | % | ≤1.0 |
| 4 | Core-Cladding Concentricity Error | μm | ≤0.5 |
| 5 | Coating Diameter | μm | 245±5 |
| 6 | Coating Non-Circularity | % | ≤6.0 |
| 7 | Cladding-Coating Concentricity Error | μm | ≤12.0 |
| 8 | Cable Cutoff Wavelength | nm | λcc≤1260 |
| 9 | Attenuation(max.) | 1310nm 1550nm 1380nm 1625nm | dB/km ≤0.35 dB/km ≤0.21 dB/km ≤0.35 dB/km ≤0.24 |


Cable Marking & Fibers Colors

COMPANY Fiber cable name N*cores G.652D 2024 XXXXm


*The marking is printed every 1 meter;

**"G.652D" means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber.

Also can according to client cable marking.

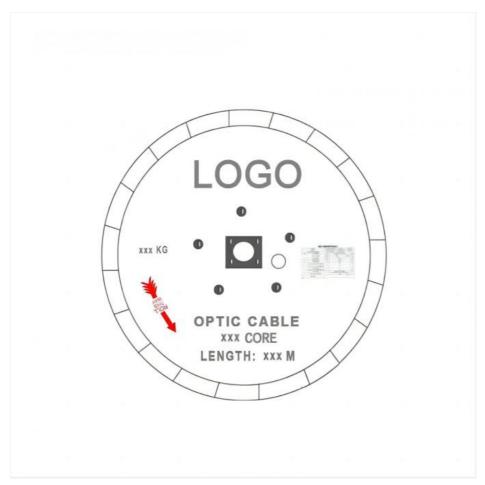

Ordering Information

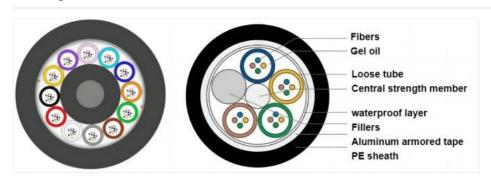





How to Place an OEM or Customized Order

Send your purchase intention to our email:cotton@fibercablepuls.com

Our sales team will contact you to confirm product specifications, packaging, printing, quantity, and other requirements

Sign the contract or Proforma Invoice

After receiving your deposit, we will arrange production

2 weeks before production completion, we will notify you to arrange shipping





925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China