




GJYXFCH Self-Support FTTH Drop Cable LSZH 1-4 Core Indoor Outdoor

Our Product Introduction


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GJYXFCH-1b6
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km

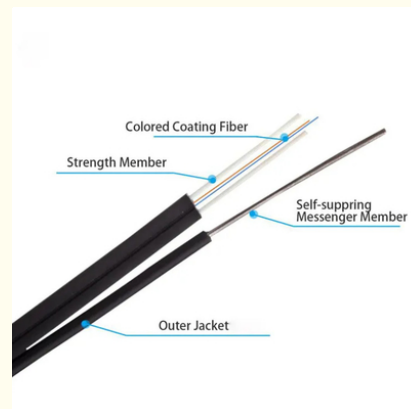

Product Specification

- Cable Model: GJYXCH/GJYXFCH-1b6
- Outer Sheath Color: Black/white
- Cable Length: 1km 2km
- Feature: Flame Retardant Characteristics
- Jacket: LSZH
- Installation Style: Indoor & Outdoor Self-Support Drop Cable
- Messenger Wire: Steel
- Highlight: **Outdoor FTTH Drop Cable, LSZH Single Mode FTTH Drop Cable, Self-Support FTTH Drop Cable**

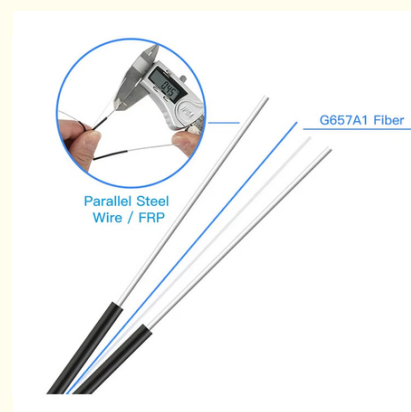

More Images



for more products please visit us on fiberoptical-cables.com

Product Description

GJYXFCH Self-Support 1 Core Outdoor FTTH Flat Drop Fiber Optic Cable LSZH Single Mode 2 Core 4 Core

Product Specifications

| | |
|--------------------|--|
| Cable Model | GJYXCH/GJYXFCH-1b6 |
| Outer Sheath Color | Black/white |
| Cable Length | 1km 2km |
| Feature | Flame retardant characteristics |
| Jacket | LSZH |
| Installation Style | Indoor & Outdoor Self-Support Drop Cable |
| Messenger Wire | Steel |

Product Overview

FTTH Drop Cable GJYXFCH Self-Support 1 Core Outdoor FTTH Flat Drop Fiber Optic Cable with LSZH (Low Smoke Zero Halogen) jacket, available in single mode with 2 or 4 core configurations.

Key Features

- Soft and bendable design for easy deployment and maintenance
- Small diameter and lightweight construction for high practicability
- Fiber reinforced plastic strength member provides excellent anti-electromagnetic performance
- Environmentally friendly LSZH sheath with flame retardant properties

Applications

- Access network or as access cable from outdoor to indoor in customer premises network
- Access building cable in premises distribution system, suitable for both indoor and outdoor use


Technical Specifications

Structural Parameters

| Model No. | Count | Cable Size (mm) | Weight (kg/km) | Tension (N) | Crush (N/100mm) | Bending Radius Static/Dynamic (mm) |
|------------|-------|---------------------|----------------|-------------|-----------------|------------------------------------|
| GJYXCH-1Xn | 1 | (2.0±0.1)×(5.0±0.1) | 20 | 300/600 | 1000/2200 | 15/30 |
| GJYXCH-2Xn | 2 | (2.0±0.1)×(5.0±0.1) | 20 | 300/600 | 1000/2200 | 15/30 |

Loading Quantity Suggestion

| Container Type | 1KM/roll | 2KM/roll |
|-----------------|----------|----------|
| 20'GP container | 812KM | 1000KM |
| 40'HQ container | 1900KM | 2000KM |

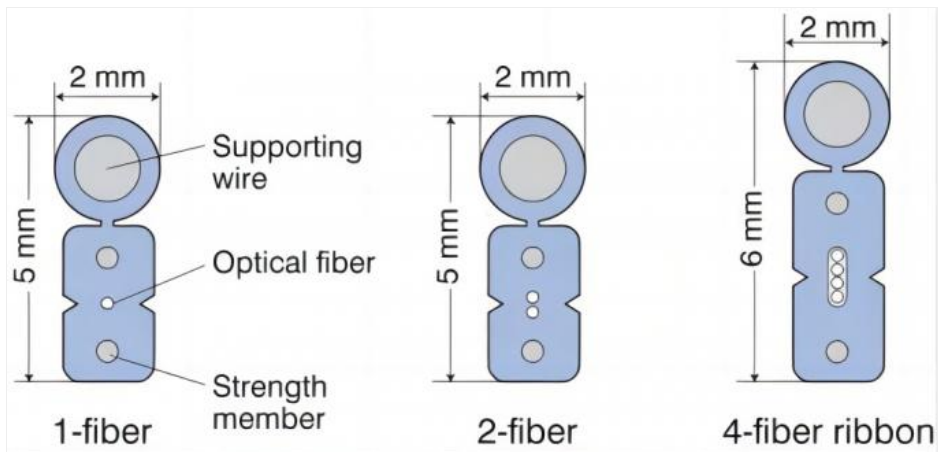


Detailed Specifications


| | |
|---|---|
| Fiber count | 1/2/4 |
| Tight buffer | LSZH, White |
| Tight buffer diameter | 0.90±0.05mm |
| Fiber Type | G657A1/A2 |
| Strength member | Glass yarn/aramid yarn |
| Outer sheath | LSZH Lower smoke zero halogen flame retardant & UV Anti |
| Cable Diameter dimensions | 3.0±0.2mm |
| Operation temperature range | -40 to + 70 |
| Installation temperature range | -5 +50 |
| Transport and storage temperature range | -40 to + 70 |

Fiber Parameters


| No. | Items | Unit | Specification G.652D |
|-----|--------------------------|----------------------|----------------------|
| 1 | Mode Field Diameter | 1310nm μm | 9.2±0.4 |
| 2 | Cladding Diameter | μm | 125.0±1.0 |
| 3 | Cladding Non-Circularity | % | ≤1.0 |
| 9 | Attenuation(max.) | 1550nm dB/km | ≤0.21 |

Product Images

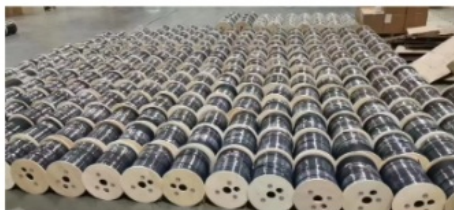

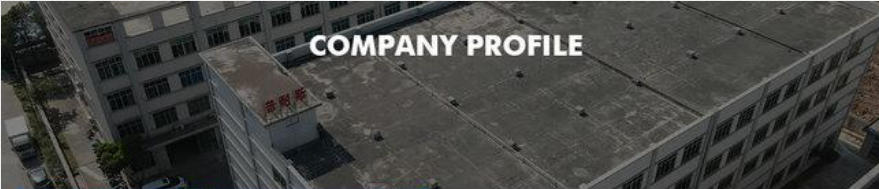

COMPANY PROFILE



ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



Ordering Information

How to place an OEM or customized order:

Send your purchase intention to our email: cotton@fibercablepuls.com

Our sales team will contact you to confirm product specifications, packaging, printing, quantity, and other requirements

Sign the contract or Proforma Invoice

After receiving your deposit, we will arrange production

2 weeks before production completion, we will notify you to arrange shipping



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong
province,China