



ADSS Fiber Optic Cable 12 Core Single Mode Aerial Installation

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ADSS-12b1.3-SJ-100M/200M
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool $\Phi 1200 \times 750$ mm
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit, 70%Balance before shipping.
- Supply Ability: 100km




Product Specification

- Type: ADSS Optical Cable-12b1.3
- Fiber Type: Single Mode
- Fiber Count: 6/12/24/36/48/72/96/144
- Outer Sheath: Black PE
- Inner Sheath Material: PE/AT
- Installation Method: Aerial
- Strength Member Material: FRP/ARMID YARN
- Cable Diameter: 12.5mm
- Highlight: 12 Cores ADSS Fiber Optic Cable, SINGLE JACKET ADSS Fiber Optic Cable, 200M ADSS Fiber Optic Cable

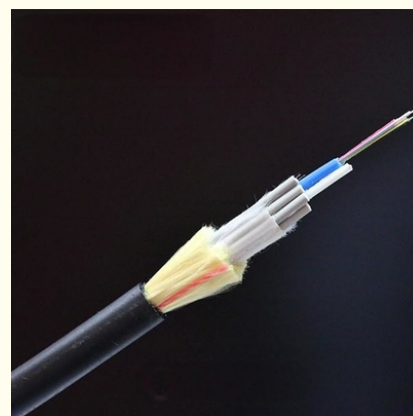

More Images



Product Description

ADSS Fiber Optic Cable 12 Cores SINGLE JACKET ADSS SPAN 50M TO 200M


Product Specifications

Attribute	Value
Type	ADSS optical cable-12b1.3
Fiber Type	Single mode
Fiber Count	6/12/24/36/48/72/96/144
Outer Sheath	Black PE
Inner Sheath Material	PE/AT
Installation Method	Aerial
Strength Member Material	FRP/ARMID YARN
Cable Diameter	12.5mm

Product Description

The Single Jacket ADSS Span 50M to 200M is a type of All-Dielectric Self-Supporting (ADSS) fiber optic cable designed for aerial installations, specifically for relatively shorter spans ranging from 50 meters to 200 meters. It is commonly used in various outdoor communication networks to provide high-speed data transmission and connectivity.

ADSS cable adopts the twisted structure of loose sleeve layer, with 250 μm optical fiber inserted into the loose tube made of high modulus materials, and the loose tube is filled with waterproof compounds. The loose tube (and filling rope) is twisted around the non-metallic center reinforcing core (FRP) to synthesize a compact cable core. The gap of the cable core is filled with a water-blocking yarn and a water-blocking belt longitudinally wrapped by the cable core, and then the aramid fiber that plays a reinforcing role is twisted. Finally, the polyethylene (PE) outer sheath or the electric mark (AT) outer sheath is extruded.

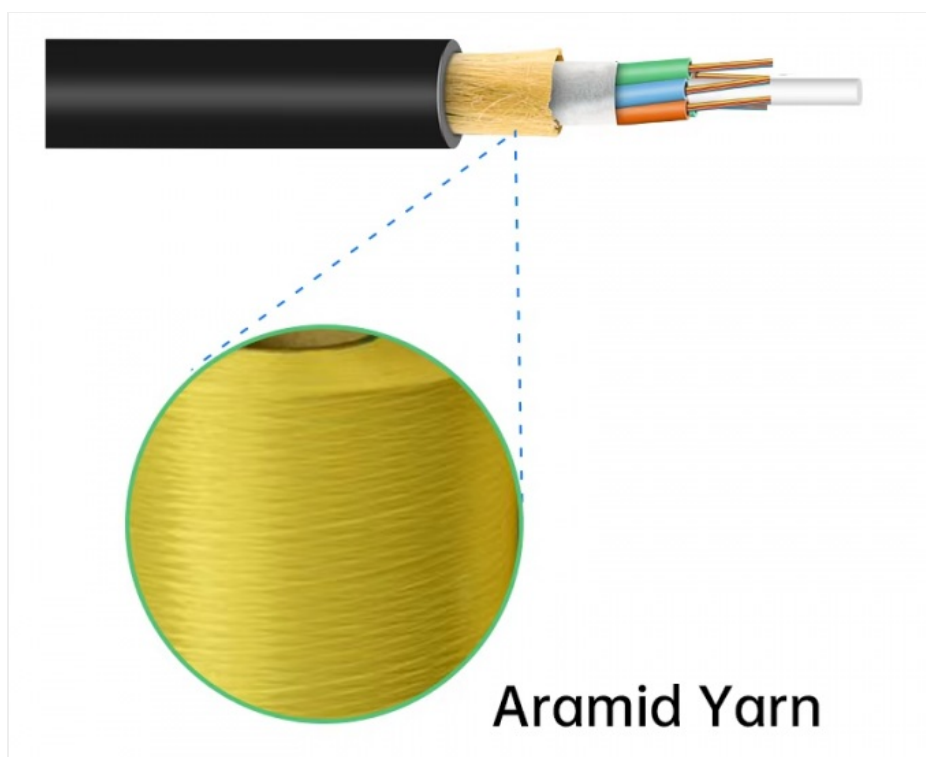

ADSS Cable Order Information

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
4	1+6	4	1.9 \pm 0.1	2.0/2.0	1.6	9.5 \pm 0.2	80

6	1+6	6	2.0±0.1	2.0/2.0	1.6	9.8±0.3	80
8	1+6	4	1.9±0.1	2.0/2.0	1.6	9.8±0.3	80
12	1+6	6	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
24	1+6	12	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
36	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
48	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
96	1+8	12	2.2±0.1	2.0/3.4	1.7	11.8±0.3	123
144	1+12	12	2.2±0.1	3.0/6.2	1.7	14.5±0.3	175

Fiber Parameters

No.	Items	Unit	Specification
1	Mode Field Diameter	1310nm	μm 9.2±0.4
		1550nm	μm 10.4±0.8
2	Cladding Diameter	μm	125.0±1.0
3	Cladding Non-Circularity	%	≤1.0
4	Core-Cladding Concentricity Error	μm	≤0.5
5	Coating Diameter	μm	245±5
6	Coating Non-Circularity	%	≤6.0
7	Cladding-Coating Concentricity Error	μm	≤12.0
8	Cable Cutoff Wavelength	nm	λ _{cc} ≤1260
9	Attenuation(max.)	1310nm	dB/km ≤0.35
		1550nm	dB/km ≤0.21
		1380nm	dB/km ≤0.35
		1625nm	dB/km ≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm	dB/km ≤0.04
		1550nm 1525-1575nm	dB/km ≤0.03
		1550nm 1480-1580nm	dB/km ≤0.05
11	Dispersion	1288-1339nm	ps/(nm.km) ≥-3.5, ≤3.5
		1271-1360nm	ps/(nm.km) ≥-5.3, ≤5.3
		1480-1580nm	ps/(nm.km) ≤20
		1550nm	ps/(nm.km) ≤18
12	Zero dispersion wavelength	Nm	1300-1324
13	Zero dispersion slope	ps/(nm ² •km)	≤0.092
14	Typical value	ps/(nm ² •km)	0.04
15	Largest individual fiber	Ps/√ km	0.2
16	Link design values	Ps/√ km	0.1
17	Two way average	1310nm-1550	≤0.01dB

Benefits of ADSS Cable

ADSS cables rely solely on their dielectric properties, eliminating the need for metal support structures and reducing installation costs.

Designed to withstand high electric fields, ADSS cables perform reliably near high-voltage power lines without interference from electromagnetic fields.

With superior weather resistance and tensile strength, ADSS cables excel in harsh environments like coastal areas and high altitudes, ensuring long-term performance.




Applications of ADSS Cables




Optical Fiber Hardware for ADSS cables



Production Supplier Profile

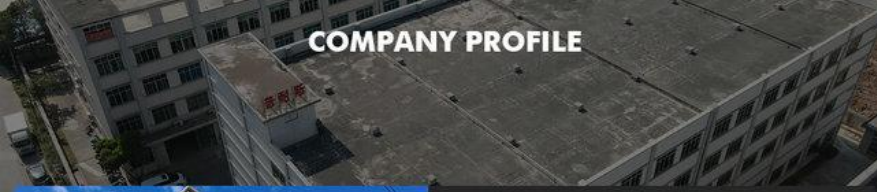

COMPANY PROFILE



ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



▲ Color Coating

▲ Color Fiber Testing

▲ Fiber to Loose Tube

▲ Stranded Loose Tube

▲ PE Sheath Coated

▲ Finished Cable Testing

How to Place an OEM or Customized Order

Send your purchase intention to our email: cotton@fibercablepuls.com

Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.

Sign the contract or Proforma Invoice.

After receiving your deposit, we will start to arrange the production.

2 weeks before the completion of production, we will notify you to start contacting shipping.



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China