




## ADSS Fiber Optic Cable 12 Cores SINGLE JACKET ADSS SPAN 50M TO 200M

Our Product Introduction

for more products please visit us on [fiberoptical-cables.com](http://fiberoptical-cables.com)


### Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAI SGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ADSS-12b1.3-SJ-100M/200M
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool  $\Phi 1200 \times 750$ mm
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit, 70%Balance before shipping.
- Supply Ability: 100km




### Product Specification

- Type: ADSS Optical Cable-12b1.3
- Fiber Type: Single Mode
- Fiber Count: 6/12/24/36/48/72/96/144
- Outer Sheath: Black PE
- Inner Sheath Material: PE/AT
- Installation Method: Aerial
- Strength Member Material: FRP/ARMID YARN
- Cable Diameter: 12.5mm
- Highlight: 12 Cores ADSS Fiber Optic Cable, SINGLE JACKET ADSS Fiber Optic Cable, 200M ADSS Fiber Optic Cable



### More Images




### Product Description

#### ADSS Fiber Optic Cable 12 Cores SINGLE JACKET ADSS SPAN 50M TO 200M

The Single JAcket ADSS Span 50M to 200M is a type of All-Dielectric Self-Supporting (ADSS) fiber optic cable designed for aerial installations, specifically for relatively shorter spans ranging from 50 meters to 200 meters. It is commonly used in various outdoor communication networks to provide high-speed data transmission and connectivity. ADSS cable adopts the twisted structure of loose sleeve layer, 250  $\mu$ m optical fiber is inserted into the loose tube made of high modulus materials, and the loose tube is filled with waterproof compounds. The loose tube ( and filling rope ) is twisted around the non-metallic center reinforcing core ( FRP ) to synthesize a compact cable core. The gap of the cable core is filled with a water-blocking yarn and a water-blocking belt longitudinally wrapped by the cable core, and then the aramid fiber that plays a reinforcing role is twisted. Finally, the polyethylene ( PE ) outer sheath or the electric mark ( AT ) outer sheath is extruded.

Our Product Introduction

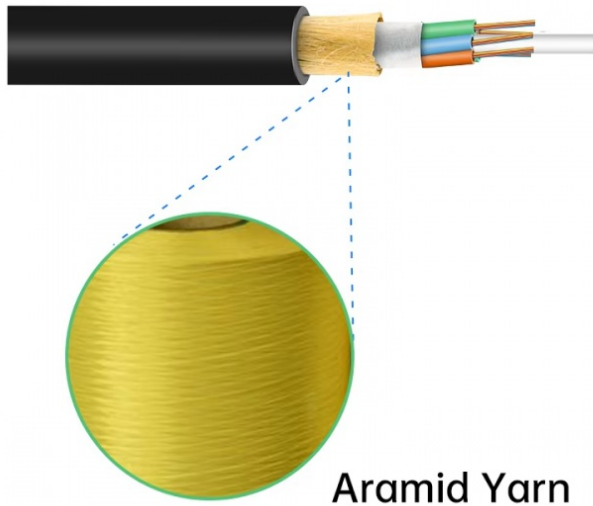

**Aramid Yarn**

**ADSS Cable Place Order Information**

| Fiber count | Structure | Fibers per tube | Loose tube diameter (mm) | CSM diameter/pad diameter (mm) | Nominal Thickness of outer jacket (mm) | Cable diameter/Height (mm) | Cable weight (kg/km) |
|-------------|-----------|-----------------|--------------------------|--------------------------------|--|----------------------------|----------------------|
| 4           | 1+6       | 4               | 1.9±0.1                  | 2.0/2.0                        | 1.6                                    | 9.5±0.2                    | 80                   |
| 6           | 1+6       | 6               | 2.0±0.1                  | 2.0/2.0                        | 1.6                                    | 9.8±0.3                    | 80                   |
| 8           | 1+6       | 4               | 1.9±0.1                  | 2.0/2.0                        | 1.6                                    | 9.8±0.3                    | 80                   |
| 12          | 1+6       | 6               | 2.1±0.1                  | 2.0/2.0                        | 1.6                                    | 9.8±0.3                    | 80                   |
| 24          | 1+6       | 12              | 2.1±0.1                  | 2.0/2.0                        | 1.6                                    | 9.8±0.3                    | 80                   |
| 36          | 1+6       | 12              | 2.2±0.1                  | 2.0/2.0                        | 1.6                                    | 10.0±0.3                   | 85                   |
| 48          | 1+6       | 12              | 2.2±0.1                  | 2.0/2.0                        | 1.6                                    | 10.0±0.3                   | 85                   |
| 72          | 1+6       | 12              | 2.2±0.1                  | 2.0/2.0                        | 1.6                                    | 10.0±0.3                   | 85                   |
| 96          | 1+8       | 12              | 2.2±0.1                  | 2.0/3.4                        | 1.7                                    | 11.8±0.3                   | 123                  |
| 144         | 1+12      | 12              | 2.2±0.1                  | 3.0/6.2                        | 1.7                                    | 14.5±0.3                   | 175                  |

**Fiber Parameters**

| No. | Items                                | Unit                     | Specification |
|-----|--------------------------------------|--------------------------|---------------|
|     |                                      |                          | G.652D        |
| 1   | Mode Field Diameter                  | 1310nm<br>1550nm         | μm<br>μm      |
| 2   | Cladding Diameter                    |                          | μm            |
| 3   | Cladding Non-Circularity             |                          | %             |
| 4   | Core-Cladding Concentricity Error    |                          | μm            |
| 5   | Coating Diameter                     |                          | μm            |
| 6   | Coating Non-Circularity              |                          | %             |
| 7   | Cladding-Coating Concentricity Error |                          | μm            |
| 8   | Cable Cutoff Wavelength              |                          | nm            |
| 9   | Attenuation(max.)                    | 1310nm                   | dB/km         |
|     |                                      | 1550nm                   | dB/km         |
|     |                                      | 1380nm                   | dB/km         |
|     |                                      | 1625nm                   | dB/km         |
| 10  | Attenuation and wavelength           | 1310nm 1285-1330nm       | dB/km         |
|     |                                      | 1550nm 1525-1575nm       | dB/km         |
|     |                                      | 1550nm 1480-1580nm       | dB/km         |
| 11  | Dispersion                           | 1288-1339nm              | ps/(nm.km)    |
|     |                                      | 1271-1360nm              | ps/(nm.km)    |
|     |                                      | 1480-1580nm              | ps/(nm.km)    |
|     |                                      | 1550nm                   | ps/(nm.km)    |
| 12  | Zero dispersion wavelength           | Nm                       | 1300-1324     |
| 13  | Zero dispersion slope                | ps/(nm <sup>2</sup> ·km) | ≤0.092        |
| 14  | Typical value                        | ps/(nm <sup>2</sup> ·km) | 0.04          |
| 15  | Largest individual fiber             | Ps/√ km                  | 0.2           |
| 16  | Link design values                   | Ps/√ km                  | 0.1           |
| 17  | Two way average                      | 1310nm-1550              | ≤0.01dB       |

**Benefits of ADSS Cable**

ADSS cables rely solely on their dielectric properties, eliminating the need for metal support structures and reducing installation costs.

Designed to withstand high electric fields, ADSS cables perform reliably near high-voltage power lines without interference from electromagnetic fields.

With superior weather resistance and tensile strength, ADSS cables excel in harsh environments like coastal areas and high altitudes, ensuring long-term performance.




#### Applications of ADSS Cables



#### Optical Fiber Hardware for ADSS cables



#### Production Supplier Profile

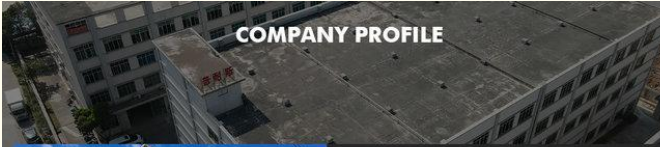

### COMPANY PROFILE

### ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001:2015, ISO14001:2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



+8613687956390 cotton@fibercabl



### OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



#### How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: [cotton@fibercablepuls.com](mailto:cotton@fibercablepuls.com)
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China